

NAComatic

Effective: 23-Sep-2010

Expires: 18-Nov-2010



Warranty

I make absolutely no warranty nor guarantee whatsoever about the accuracy, availability, applicability and/or correctness of any of the information in this document.

The official, original NACO documents are available for your downloading pleasure from: <http://naco.faa.gov/index.asp?xml=naco/onlineproducts>

Copyright

This compilation is protected by US copyright laws and international copyright treaties.

Limitations

The sale, hosting and/or distribution of this document in any and all forms, is prohibited.

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R. Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS FOR DAMAGE TO MY PROPERTY OR REPUTATION caused in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

0U8	=>	48
1U9	=>	54
24K	=>	48
50S	=>	53
52U	=>	28
55H	=>	27
65S	=>	31
66S	=>	35
67S	=>	52
75C	=>	53
78U	=>	46
85U	=>	59
AOC	=>	27
BOI	=>	30
BYI	=>	32
COE	=>	34
DIJ	=>	37
EUL	=>	32
GNG	=>	40
IDA	=>	43
JER	=>	44
LLJ	=>	33
LWS	=>	46
MAN	=>	52
MLD	=>	48
MUO	=>	50
MYL	=>	49
PIH	=>	54
RXE	=>	56
SMN	=>	58
SUN	=>	41
SZT	=>	58
TWF	=>	61
U03	=>	31
U53	=>	45
U97	=>	42

GENERAL INFORMATION

This Airport/Facility Directory is a Civil Flight Information Publication published and distributed every eight weeks by the FAA Department of Transportation, National Aeronautical Navigation Services, Silver Spring, Maryland 20910. It is designed for use with Aeronautical Charts covering the conterminous United States, Puerto Rico and the Virgin Islands.

This directory contains all open to the public airports, seaplane bases and heliports, military facilities, and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally, this directory contains communications data, navigational facilities and certain special notices and procedures.

Military data contained within this publication is provided by the National Geospatial-Intelligence Agency and is intended to provide reference data for military and/or joint civil/military airports. Not all military data contained in this publication is applicable to civil users.

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

CRITICAL information such as equipment malfunction, abnormal field conditions, hazards to flight, etc., should be reported as soon as possible to the nearest FAA facility, either in person or by reverse charge telephone call.

FOR AIRPORT SUPPLEMENT REVISIONS FORM VISIT WEB SITE: <http://nfdc.faa.gov/portal/airportchanges.do>

FAA, Aeronautical Information Services, ATO-R, Rm. 626
800 Independence Ave., SW
Washington, DC 20591
Telephone 1-866-295-8236
Fax 202-267-5322
Email 9-ATOR-HQ-AIS-AIRPORTCHANGES@FAA.GOV

NOTICE: Changes must be received by the Aeronautical Information Services as soon as possible but not later than the "cut-off" dates listed below to assure publication on the desired effective date.

Effective Date	Airport Information	Airspace Information*
	Cut-off date	Cut-off date
23 Sep 10	11 Aug 10	22 Jul 10
18 Nov 10	6 Oct 10	16 Sep 10
13 Jan 11	1 Dec 10	11 Nov 10
10 Mar 11	26 Jan 11	6 Jan 11
5 May 11	23 Mar 11	3 Mar 11
30 Jun 11	18 May 11	28 Apr 11

*Including changes to preferred routes and graphic depictions on charts.

FOR CHARTING ERRORS CONTACT:

FAA, National Aeronautical Navigation Services
SSMC-4 Sta. #4435
1305 East West Highway
Silver Spring, MD 20910-3281
Telephone 1-800-626-3677
Email 9-AMC-Aerochart@faa.gov

Frequently asked questions (FAQs) are answered on our website at <http://aeronav.faa.gov>.
See the FAQs prior to contact via toll free number.

FOR PROCUREMENT CONTACT:

FAA, National Aeronautical Navigation Services
REDIS/Distribution Team
10201 Good Luck Road
Glenn Dale, MD 20769-9700
Online at <http://aeronav.faa.gov>
Email 9-AMC-Chartsales@faa.gov
Telephone 1-800-638-8972
Fax 301-436-6829
or any authorized chart agent.

New or Changed Information—To alert users of new information or changes to information from the previous issue, a vertical line will be portrayed in the outside margin and extending the full length of the new and/or revised data. This will not apply to the front cover or the airport/facility directory listing.

This Airport/Facility Directory comprises part of the following sections of the United States Aeronautical Information Publication (AIP): GEN, ENR and AD.

GENERAL INFORMATION

TABLE OF CONTENTS

General Information.....	Inside F
Abbreviations	2
Directory Legend	4
Airport/Facility Directory	
Idaho.....	22
Montana	59
Oregon	104
Washington	141
Wyoming.....	195
City/Military Airport Cross Reference.....	216
Seaplane Landing Areas	217
Special Notices.....	218
Regulatory Notices	226
FAA and National Weather Service	
Telephone Numbers	227
Key to Aviation Weather Reports	228
Air Traffic Facilities Telephone Numbers	230
Air Route Traffic Control Centers	232
Flight Service Station Communication Frequencies	233
Flight Standards District Offices.....	236
Routes/Waypoints	
Low Altitude Directional Routes	237
High Altitude Preferred Routes.....	238
Q-Routes.....	239
RNAV Routing Pitch and Catch Points	242
VFR Waypoints.....	253
VOR Receiver Check	261
Parachute Jumping Areas	264
Aeronautical Chart Bulletins	266
Supplemental Communication Reference	272
Airport Diagrams	278
National Weather Service (NWS) Upper Air Observing Stations	328
Enroute Flight Advisory Service (EFAS)	Inside B

ABBREVIATIONS

The following abbreviations/acronyms are those commonly used within this Directory. Other abbreviations/acronyms may be found in the Legend and are not duplicated below. The abbreviations presented are intended to represent grammatical variations of the basic form. (Example—"req" may mean "request", "requesting", "requested", or "requests").

AAF	Army Air Field	byd	beyond
AB	Airbase	C	Commercial Circuit (Telephone)
abv	above	CGAF	Coast Guard Air Facility
ACC	Air Combat Command; Area Control Center	CGAS	Coast Guard Air Station
acft	aircraft	CIV	Civil
ADCC	Air Defense Control Center	clsd	closed
AER	approach end rwy	comd	command
AFB	Air Force Base	CONUS	Continental United States
AFHP	Air Force Heliport	CSTMS	Customs
afld	airfield	ctc	contact
AFOD	US Army Flight Operations Detachment	ctl	control
AFRC	Armed Forces Reserve Center/Air Force Reserve Command	dalgt	daylight
AFSS	Automated Flight Service Station	Dec	December
AG	Agriculture	DIAP	DoD Instrument Approach Procedure
A-GEAR	Arresting Gear	DoD	Department of Defense
AGL	above ground level	DSN	Defense Switching Network (Telephone)
AHP	Army heliport	dsplcd	displaced
ALS	Approach Light System	durn	duration
alt	altitude	eff	effective
AMC	Air Mobility Command	emerg	emergency
ANGS	Air National Guard Station	EOR	End of Runway
apch	approach	ETA	Estimated Time of Arrival
Apr	April	ETD	Estimated Time of Departure
APU	Auxiliary Power Unit	exc	except
ARB	Air Reserve Base	extd	extend
arpt	airport	FBO	fixed-base operator
ARS	Air Reserve Station	Feb	February
AS	Air Station	fld	field
ASDE-X	Airport Surface Detection Equipment—Model X	FLIP	Flight Information Publication
ASU	Aircraft Starting Unit	flt	flight
ATC	Air Traffic Control	flw	follow
ATCT	Airport Traffic Control Tower	Fri	Friday
Aug	August	FSS	Flight Service Station
AUW	All Up Weight (gross weight)	GA	glide angle
avbl	available	GCA	Ground Controlled Approach
bcn	beacon	GS	glide slope
blo	below	haz	hazard
		HQ	Headquarters

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

hr	hour	npi	non precision instrument
IAP	Instrument Approach Procedure	NS ABTMT	Noise Abatement
ICAO	International Civil Aviation Organization	NSTD	nonstandard
IFR	Instrument Flight Rules	ntc	notice
ILS	Instrument Landing System	obsn	observation
IM	Inner Marker	Oct	October
IMG	Immigration	OLF	Outlying Field
incr	increase	opr	operate, operator, operational
indef	indefinite	ops	operations
ints	intensity	OTS	out of service
invo	in the vicinity of	ovrn	overrun
IMC	Instrument Meteorological Conditions	PAEW	personnel and equipment working
Jan	January	pat	pattern
JASU	Jet Aircraft Starting Unit	p-line	power line
JOAP	Joint Oil Analysis Program	PMSV	Pilot-to-Metro Service
JOSAC	Joint Operational Support Airlift Center	POL	Petrol, Oils and Lubricants
JRB	Joint Reserve Base	PPR	prior permission required
Jul	July	PRM	Precision Runway Monitoring
Jun	June	PTD	Pilot to Dispatcher
Kt	Knots	RAMCC	Regional Air Movement Control Center
LAA	Local Airport Advisory	req	request
LAHSO	Land and Hold Short Operations	rgt tfc	right traffic
lbs	pounds	RON	Remain Overnight
ldg	landing	rqr	require
Igtd	lighted	rstd	restricted
Igts	lights	RSRS	reduced same runway separation
LMM	Compass locator at Middle Marker ILS	rwy	runway
LOC	Localizer	Sat	Saturday
LOM	Compass locator at Outer Marker ILS	SELF	Strategic Expeditionary Landing Field
ltd	limited	Sep	September
MACC	Military Area Control Center	SFA	Single Frequency Approach
Mar	March	sfc	surface
MCAF	Marine Corps Air Facility	SFRA	Special Flight Rules Area
MCALF	Marine Corps Auxiliary Landing Field	SOAP	Spectrometric Oil Analysis Program
MCAS	Marine Corps Air Station	SOF	Supervisor of Flying
MCB	Marine Corps Base	SPB	Seaplane Base
med	medium	SR	sunrise
METRO	Pilot-to-Metro voice call	SS	sunset
Mil	military	std	standard
min	minute	Sun	Sunday
MLS	Microwave Landing System	svc	service
MM	Middle Marker of ILS	tfc	traffic
Mon	Monday	thld	threshold
MP	Maintenance Period	Thu	Thursday
MSL	mean sea level	tkf	take-off
MSAW	minimum safe altitude warning	tmpry	temporary
NAAS	Naval Auxiliary Air Station	tran	transient
NADC	Naval Air Development Center	Tue	Tuesday
NADEP	Naval Air Depot	twr	tower
NAEC	Naval Air Engineering Center	twy	taxiway
NAES	Naval Air Engineering Station	UC	Under Construction
NAF	Naval Air Facility	USA	United States Army
NALCO	Naval Air Logistics Control Office	USAF	United States Air Force
NALO	Navy Air Logistics Office	USCG	United States Coast Guard
NALF	Naval Auxiliary Landing Field	USN	United States Navy
NAS	Naval Air Station	V	Defense Switching Network (telephone, formerly AUTOVON)
NAWC	Naval Air Warfare Center	VFR	Visual Flight Rules
NAWS	Naval Air Weapons Station	VIP	Very Important Person
ngt	night	VMC	Visual Meteorological Conditions
NOLF	Naval Outlying Field	Wed	Wednesday
Nov	November	wx	weather

SAMPLE


①
CITY NAME
 ②
AIRPORT NAME (ALTERNATE NAME) (LTS) (KLTS) CIV/MIL 3 N UTC-6(-5DT) N34°41.93' W99°20.20' JACKSONVILLE
 200 B S4 FUEL 100 OX 1 TPA-1000(800) AOE Class IV, ARFF Index A NOTAM FILE ORL Not insp. COPTER
 ③ ④ ⑤ ⑥ ⑦ ⑧
 ⑨
 ⑩
 ⑪
 ⑫
 ⑬
 ⑭
 ⑮
 ⑯
 ⑰
 ⑱
 ⑲
 ⑳
 ㉑
RWY 18-36: H12004X200 (ASPH-CONC-GRVD)
 S-90, D-160, 2D-300 PCN 80 R/B/W/T HIRL CL
RWY 18: LDIN: MALSF. TDZL. REIL. PAPI(P2R)—GA 3.0° TCH 36'.
 Thld dsplcd 300'. Trees. Rgt tfe. 0.3% up.
RWY 36: ALSF1. 0.4% down.
RWY 09-27: H6000X150 (ASPH) MIRL
RWY 173-353: H3515X150 (ASPH-PFC) AUW PCN 59 F/A/W/T
LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 18	09-27	6500
RWY 36	09-27	5400

RUNWAY DECLARED DISTANCE INFORMATION
RWY 18: TORA-12004 TODA-12704 ASDA-11704 LDA-11504
RWY 36: TORA-12004 TODA-12004 ASDA-12004 LDA-11704
 ㉒
ARRESTING GEAR/SYSTEM
RWY 18 → HOOK E5 (65' OVRN) BAK-14 BAK-12B (1650')
 BAK-14 BAK-12 (B) (1087') HOOK E5 (74' OVRN) ← **RWY 36**
 ㉓
MILITARY SERVICE: A-GEAR E-5 connected on dep end, disconnected on
 apch end. JASU 3(AM32A-60) 2(A/M32A-86)
 ㉔
 ㉕ → **FUEL** J8(Mil) (NC-100, A) **FLUID W SP PRESAIR LOX** ← ㉖
 OIL O-128 **TRAN ALERT** Avbl 1300-0200Z†, svc limited weekends.
 ㉗ ㉘
 ㉙ → **AIRPORT REMARKS:** Special Air Traffic Rules—Part 93, see Regulatory Notices. Attended 1200-0300Z†. Parachute
 Jumping. Deer invov arpt. Heavy jumbo jet training surface to 9000'. Twy A clsd indef. Flight Notification Service
 (ADCUS) avbl.
 ㉚ → **MILITARY REMARKS:** ANG PPR/Official Business Only. Base OPS DSN 638-4390, C503-335-4222. Ctc Base OPS 15
 minutes prior to ldg and after dep. Limited tran parking.
 ㉛ → **WEATHER DATA SOURCES:** AWOS-1 120.3 (202) 426-8000. LLWAS.
 ㉜ → **COMMUNICATIONS:** SFA ATIS 127.25 273.5 (202) 426-8003 **UNICOM** 122.95 **PTD** 372.2
NAME FSS (ORL) on arpt. 123.65 122.65 122.2
NAME RCO 112.2T 112.1R (NAME RADIO)
 ㉝ **NAME APP/DEP CON** 128.35 257.725 (1200-0400Z†)
TOWER 119.65 255.6 (1200-0400Z†) **GND CON** 121.7 **GCO** 135.075 (ORLANDO CLNC) **CLNC DEL** 125.55
NAME COMD POST (GERONIMO) 311.0 321.4 6761 **PMSV METRO** 239.8 **NAME OPS** 257.5
 ㉞ → **AIRSPACE:** CLASS B See VFR Terminal Area Chart.
 ㉟ → **RADIO AIDS TO NAVIGATION:** NOTAM FILE ORL. VHF/DF etc FSS.
 (H) VORTAC 112.2 MCO Chan 59 N28°32.55' W81°20.12' at fld. 1110/8E.
 (H) TACAN Chan 29 CBU (109.2) N28°32.65' W81°21.12' at fld. 1115/8E.
HERNY NDB (LOM) 221 OR N28°37.40' W81°21.05' 177° 5.4 NM to fld.
ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.
ASR/PAR (1200-0400Z†)
 ㊱ → **COMM/NAV/WEATHER REMARKS:** Emerg frequency 121.5 not avbl at twr.

HELIPAD H1: H100X75 (ASPH)
HELIPAD H2: H60X60 (ASPH)
HELIPORT REMARKS: Helipad H1 lctd on general aviation side and H2 lctd on air carrier side of arpt.

 1
187 TPA 1000(813)
WATERWAY 15-33: 5000X425 (WATER)
SEAPLANE REMARKS: Birds roosting and feeding areas along river banks. Seaplanes operating adjacent to SW side of
 arpt not visible from twr and are required to ctc twr.

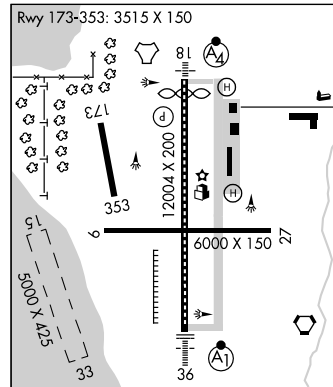

All bearings and radials are magnetic unless otherwise specified.

All mileages are nautical unless otherwise noted.

All times are Coordinated Universal Time (UTC) except as noted.

All elevations are in feet above/below Mean Sea Level (MSL) unless otherwise noted.

The horizontal reference datum of this publication is North American Datum of 1983 (NAD83), which for charting purposes is considered equivalent to World Geodetic System 1984 (WGS 84).

10

SKETCH LEGEND

RUNWAYS/LANDING AREAS

Hard Surfaced	
Metal Surface	
Sod, Gravel, etc.	
Light Plane,	
Ski Landing Area or Water	
Under Construction	
Closed	
Helicopter Landings Area	
Displaced Threshold	
Taxiway, Apron and Stopways . .	

MISCELLANEOUS BASE AND CULTURAL FEATURES

Buildings	
Power Lines	
Fence	
Towers	
Tanks	
Oil Well	
Smoke Stack	
Obstruction	
Controlling Obstruction	
Trees	
Populated Places	
Cuts and Fills	
Cliffs and Depressions	
Ditch	
Hill	

RADIO AIDS TO NAVIGATION

VORTAC		VOR	
VOR/DME		NDB	
TACAN		NDB/DME	

MISCELLANEOUS AERONAUTICAL FEATURES

Airport Beacon	
Wind Cone	
Landing Tee	
Tetrahedron	
Control Tower	

APPROACH LIGHTING SYSTEMS

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A1) Negative symbology, e.g., (A1) indicates Pilot Controlled Lighting (PCL).

Runway Centerline Lighting	
(A) Approach Lighting System ALSF-2 . .	
(A1) Approach Lighting System ALSF-1 . .	
(A2) Short Approach Lighting System SALS/SALSF	
(A3) Simplified Short Approach Lighting System (SSALR) with RAIL	
(A4) Medium Intensity Approach Lighting System (MALS and MALSF)/(SSALS and SSALF)	
(A5) Medium Intensity Approach Lighting System (MALSR) and RAIL	
(Y) Omnidirectional Approach Lighting System (ODALS)	
(D) Navy Parallel Row and Cross Bar . .	
(F) Air Force Overrun	
(V) Visual Approach Slope Indicator with Standard Threshold Clearance provided	
(V2) Pulsating Visual Approach Slope Indicator (PVASI)	
(V3) Visual Approach Slope Indicator with a threshold crossing height to accommodate long bodied or jumbo aircraft	
(V4) Tri-color Visual Approach Slope Indicator (TRCV)	
(V5) Approach Path Alignment Panel (APAP)	
(P) Precision Approach Path Indicator (PAPI)	

LEGEND

This directory is a listing of data on record with the FAA on all open to the public airports, military facilities and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally this listing contains data for associated terminal control facilities, air route traffic control centers, and radio aids to navigation within the conterminous United States, Puerto Rico and the Virgin Islands. Joint civil/military and civil airports are listed alphabetically by state, associated city and airport name and cross-referenced by airport name. Military facilities are listed alphabetically by state and official airport name and cross-referenced by associated city name. Navajids, flight service stations and remote communication outlets that are associated with an airport, but with a different name, are listed alphabetically under their own name, as well as under the airport with which they are associated.

The listing of an open to the public airport in this directory merely indicates the airport operator's willingness to accommodate transient aircraft, and does not represent that the facility conforms with any Federal or local standards, or that it has been approved for use on the part of the general public. Military and private use facilities published in this directory are open to civil pilots only in an emergency or with prior permission. See Special Notice Section, Civil Use of Military Fields.

The information on obstructions is taken from reports submitted to the FAA. Obstruction data has not been verified in all cases. Pilots are cautioned that objects not indicated in this tabulation (or on the airports sketches and/or charts) may exist which can create a hazard to flight operation. Detailed specifics concerning services and facilities tabulated within this directory are contained in the Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

The legend items that follow explain in detail the contents of this Directory and are keyed to the circled numbers on the sample on the preceding pages.

① CITY/AIRPORT NAME

Civil and joint civil/military airports and facilities in this directory are listed alphabetically by state and associated city. Where the city name is different from the airport name the city name will appear on the line above the airport name. Airports with the same associated city name will be listed alphabetically by airport name and will be separated by a dashed rule line. A solid rule line will separate all others. FAA approved helipads and seaplane landing areas associated with a land airport will be separated by a dotted line. Military airports are listed alphabetically by state and official airport name.

② ALTERNATE NAME

Alternate names, if any, will be shown in parentheses.

③ LOCATION IDENTIFIER

The location identifier is a three or four character FAA code followed by a four-character ICAO code assigned to airports. ICAO codes will only be published at joint civil/military, and military facilities. If two different military codes are assigned, both codes will be shown with the primary operating agency's code listed first. These identifiers are used by ATC in lieu of the airport name in flight plans, flight strips and other written records and computer operations. Zeros will appear with a slash to differentiate them from the letter "O".

④ OPERATING AGENCY

Airports within this directory are classified into two categories, Military/Federal Government and Civil airports open to the general public, plus selected private use airports. The operating agency is shown for military, private use and joint civil/military airports. The operating agency is shown by an abbreviation as listed below. When an organization is a tenant, the abbreviation is enclosed in parenthesis. No classification indicates the airport is open to the general public with no military tenant.

A	US Army	MC	Marine Corps
AFRC	Air Force Reserve Command	N	Navy
AF	US Air Force	NAF	Naval Air Facility
ANG	Air National Guard	NAS	Naval Air Station
AR	US Army Reserve	NASA	National Air and Space Administration
ARNG	US Army National Guard	P	US Civil Airport Wherein Permit Covers
CG	US Coast Guard		Use by Transient Military Aircraft
CIV/MIL	Joint Use Civil/Military	PVT	Private Use Only (Closed to the Public)
DND	Department of National Defense Canada		

⑤ AIRPORT LOCATION

Airport location is expressed as distance and direction from the center of the associated city in nautical miles and cardinal points, e.g., 4 NE.

⑥ TIME CONVERSION

Hours of operation of all facilities are expressed in Coordinated Universal Time (UTC) and shown as "Z" time. The directory indicates the number of hours to be subtracted from UTC to obtain local standard time and local daylight saving time UTC-5(-4DT). The symbol ‡ indicates that during periods of Daylight Saving Time effective hours will be one hour earlier than shown. In those areas where daylight saving time is not observed the (-4DT) and ‡ will not be shown. Daylight saving time is in effect from 0200 local time the second Sunday in March to 0200 local time the first Sunday in November. Canada and all U.S. Conterminous States observe daylight saving time except Arizona and Puerto Rico, and the Virgin Islands. If the state observes daylight saving time and the operating times are other than daylight saving times, the operating hours will include the dates, times and no ‡ symbol will be shown, i.e., April 15-Aug 31 0630-1700Z, Sep 1-Apr 14 0600-1700Z.

⑦ GEOGRAPHIC POSITION OF AIRPORT—AIRPORT REFERENCE POINT (ARP)

Positions are shown as hemisphere, degrees, minutes and hundredths of a minute and represent the approximate geometric center of all usable runway surfaces.

⑧ CHARTS

Charts refer to the Sectional Chart and Low and High Altitude Enroute Chart and panel on which the airport or facility is located. Helicopter Chart locations will be indicated as COPTER. IFR Gulf of Mexico West and IFR Gulf of Mexico Central will be depicted as GOMW and GOMC.

⑨ INSTRUMENT APPROACH PROCEDURES, AIRPORT DIAGRAM

IAP indicates an airport for which a prescribed (Public Use) FAA Instrument Approach Procedure has been published. DIAP indicates an airport for which a prescribed DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures. See the Special Notice Section of this directory, Civil Use of Military Fields and the Aeronautical Information Manual 5-4-5 Instrument Approach Procedure Charts for additional information. AD indicates an airport for which an airport diagram has been published. Airport diagrams are located in the back of each A/FD volume alphabetically by associated city and airport name.

⑩ AIRPORT SKETCH

The airport sketch, when provided, depicts the airport and related topographical information as seen from the air and should be used in conjunction with the text. It is intended as a guide for pilots in VFR conditions. Symbology that is not self-explanatory will be reflected in the sketch legend. The airport sketch will be oriented with True North at the top. Airport sketches will be added incrementally.

⑪ ELEVATION

The highest point of an airport's usable runways measured in feet from mean sea level. When elevation is sea level it will be indicated as "00". When elevation is below sea level a minus "-" sign will precede the figure.

⑫ ROTATING LIGHT BEACON

B indicates rotating beacon is available. Rotating beacons operate sunset to sunrise unless otherwise indicated in the AIRPORT REMARKS or MILITARY REMARKS segment of the airport entry.

⑬ SERVICING—CIVIL

S1: Minor airframe repairs.	S5: Major airframe repairs.
S2: Minor airframe and minor powerplant repairs.	S6: Minor airframe and major powerplant repairs.
S3: Major airframe and minor powerplant repairs.	S7: Major powerplant repairs.
S4: Major airframe and major powerplant repairs.	S8: Minor powerplant repairs.

⑭ FUEL

CODE	FUEL	CODE	FUEL
80	Grade 80 gasoline (Red)	B+	Jet B, Wide-cut, turbine fuel with FS-II*, FP** minus 50° C.
100	Grade 100 gasoline (Green)	J4 (JP4)	(JP-4 military specification) FP** minus 58° C.
100LL	100LL gasoline (low lead) (Blue)	J5 (JP5)	(JP-5 military specification) Kerosene with FS-11, FP** minus 46° C.
115	Grade 115 gasoline (115/145 military specification) (Purple)	J8 (JP8)	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, FP** minus 47° C.
A	Jet A, Kerosene, without FS-II*, FP** minus 40° C.	J8+100	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, FP** minus 47° C, with-fuel additive package that improves thermo stability characteristics of JP-8.
A+	Jet A, Kerosene, with FS-II*, FP** minus 40° C.	J	(Jet Fuel Type Unknown)
A1	Jet A-1, Kerosene, without FS-II*, FP** minus 47° C.	MOGAS	Automobile gasoline which is to be used as aircraft fuel.
A1+	Jet A-1, Kerosene with FS-II*, FP** minus 47° C.		
B	Jet B, Wide-cut, turbine fuel without FS-II*, FP** minus 50° C.		

*(Fuel System Icing Inhibitor)

** (Freeze Point)

NOTE: Certain automobile gasoline may be used in specific aircraft engines if a FAA supplemental type certificate has been obtained. Automobile gasoline, which is to be used in aircraft engines, will be identified as "MOGAS", however, the grade/type and other octane rating will not be published.

Data shown on fuel availability represents the most recent information the publisher has been able to acquire. Because of a variety of factors, the fuel listed may not always be obtainable by transient civil pilots. Confirmation of availability of fuel should be made directly with fuel suppliers at locations where refueling is planned.

⑮ OXYGEN—CIVIL

OX 1 High Pressure	OX 3 High Pressure—Replacement Bottles
OX 2 Low Pressure	OX 4 Low Pressure—Replacement Bottles

⑯ TRAFFIC PATTERN ALTITUDE

Traffic Pattern Altitude (TPA)—The first figure shown is TPA above mean sea level. The second figure in parentheses is TPA above airport elevation. Multiple TPA shall be shown as "TPA—See Remarks" and detailed information shall be shown in the Airport or Military Remarks Section. Traffic pattern data for USAF bases, USN facilities, and U.S. Army airports (including those on which ACC or U.S. Army is a tenant) that deviate from standard pattern altitudes shall be shown in Military Remarks.

⑪ AIRPORT OF ENTRY, LANDING RIGHTS, AND CUSTOMS USER FEE AIRPORTS

U.S. CUSTOMS USER FEE AIRPORT—Private Aircraft operators are frequently required to pay the costs associated with customs processing.

AOE—Airport of Entry. A customs Airport of Entry where permission from U.S. Customs is not required to land. However, at least one hour advance notice of arrival is required.

LRA—Landing Rights Airport. Application for permission to land must be submitted in advance to U.S. Customs. At least one hour advance notice of arrival is required.

NOTE: Advance notice of arrival at both an AOE and LRA airport may be included in the flight plan when filed in Canada or Mexico. Where Flight Notification Service (ADCUS) is available the airport remark will indicate this service. This notice will also be treated as an application for permission to land in the case of an LRA. Although advance notice of arrival may be relayed to Customs through Mexico, Canada, and U.S. Communications facilities by flight plan, the aircraft operator is solely responsible for ensuring that Customs receives the notification. (See Customs, Immigration and Naturalization, Public Health and Agriculture Department requirements in the International Flight Information Manual for further details.)

US Customs Air and Sea Ports, Inspectors and Agents

Northeast Sector (New England and Atlantic States—ME to MD)

407-975-1740

Southeast Sector (Atlantic States—DC, WV, VA to FL)

407-975-1780

Central Sector (Interior of the US, including Gulf states—MS, AL, LA)

407-975-1760

Southwest East Sector (OK and eastern TX)

407-975-1840

Southwest West Sector (Western TX, NM and AZ)

407-975-1820

Pacific Sector (WA, OR, CA, HI and AK)

407-975-1800

⑫ CERTIFICATED AIRPORT (14 CFR PART 139)

Airports serving Department of Transportation certified carriers and certified under 14 CFR part 139 are indicated by the Class and the ARFF Index; e.g. Class I, ARFF Index A, which relates to the availability of crash, fire, rescue equipment. Class I airports can have an ARFF Index A through E, depending on the aircraft length and scheduled departures. Class II, III, and IV will always carry an Index A.

14 CFR PART 139 CERTIFICATED AIRPORTS AIRPORT CLASSIFICATIONS

Type of Air Carrier Operation	Class I	Class II	Class III	Class IV
Scheduled Air Carrier Aircraft with 31 or more passenger seats	X			
Unscheduled Air Carrier Aircraft with 31 or more passengers seats	X	X		X
Scheduled Air Carrier Aircraft with 10 to 30 passenger seats	X	X	X	

14 CFR—PART 139 CERTIFICATED AIRPORTS

INDICES AND AIRCRAFT RESCUE AND FIRE FIGHTING EQUIPMENT REQUIREMENTS

<i>Airport Index</i>	<i>Required No. Vehicles</i>	<i>Aircraft Length</i>	<i>Scheduled Departures</i>	<i>Agent + Water for Foam</i>
A	1	<90'	≥1	500#DC or HALON 1211 or 450#DC + 100 gal H ₂ O
B	1 or 2	≥90', <126' ----- ≥126', <159'	≥5 ----- <5	Index A + 1500 gal H ₂ O
C	2 or 3	≥126', <159' ----- ≥159', <200'	≥5 ----- <5	Index A + 3000 gal H ₂ O
D	3	≥159', <200' ----- >200'	<5	Index A + 4000 gal H ₂ O
E	3	≥200'	≥5	Index A + 6000 gal H ₂ O

> Greater Than; < Less Than; ≥ Equal or Greater Than; ≤ Equal or Less Than; H₂O—Water; DC—Dry Chemical.

NOTE: The listing of ARFF index does not necessarily assure coverage for non-air carrier operations or at other than prescribed times for air carrier. ARFF Index Ltd.—indicates ARFF coverage may or may not be available, for information contact airport manager prior to flight.

⑬ NOTAM SERVICE

All public use landing areas are provided NOTAM “D” (distant dissemination) and NOTAM “L” (local dissemination) service. Airport NOTAM file identifier is shown for individual airports, e.g. “NOTAM FILE IAD”. See AIM, Basic Flight Information and

ATC Procedures for detailed description of NOTAM's. Current NOTAMs are available from Flight Service Stations at 1-800-WX-BRIEF. Real time Military NOTAMs are available using the DoD Internet NOTAM Distribution System (DINS) www.notams.jcs.mil.

② FAA INSPECTION

All airports not inspected by FAA will be identified by the note: Not insp. This indicates that the airport information has been provided by the owner or operator of the field.

②1 RUNWAY DATA

Runway information is shown on two lines. That information common to the entire runway is shown on the first line while information concerning the runway ends is shown on the second or following line. Runway direction, surface, length, width, weight bearing capacity, lighting, and slope, when available are shown for each runway. Multiple runways are shown with the longest runway first. Direction, length, width, and lighting are shown for sea-lanes. The full dimensions of helipads are shown, e.g., 50X150. Runway data that requires clarification will be placed in the remarks section.

RUNWAY DESIGNATION

Runways are normally numbered in relation to their magnetic orientation rounded off to the nearest 10 degrees. Parallel runways can be designated L (left)/R (right)/C (center). Runways may be designated as Ultralight or assault strips. Assault strips are shown by magnetic bearing.

RUNWAY DIMENSIONS

Runway length and width are shown in feet. Length shown is runway end to end including displaced thresholds, but excluding those areas designed as overruns.

RUNWAY SURFACE AND LENGTH

Runway lengths prefixed by the letter "H" indicate that the runways are hard surfaced (concrete, asphalt, or part asphalt-concrete). If the runway length is not prefixed, the surface is sod, clay, etc. The runway surface composition is indicated in parentheses after runway length as follows:

(AFSC)—Aggregate friction seal coat	(GRVL)—Gravel, or cinders	(PSP)—Pierced steel plank
(ASPH)—Asphalt	(MATS)—Pierced steel planking,	(RFSC)—Rubberized friction seal coat
(CONC)—Concrete	landing mats, membranes	(TURF)—Turf
(DIRT)—Dirt	(PEM)—Part concrete, part asphalt	(TRTD)—Treated
(GRVD)—Grooved	(PFC)—Porous friction courses	(WC)—Wire combed

RUNWAY WEIGHT BEARING CAPACITY

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of the published figures. Permissible operating weights, insofar as runway strengths are concerned, are a matter of agreement between the owner and user. When desiring to operate into any airport at weights in excess of those published in the publication, users should contact the airport management for permission. Runway strength figures are shown in thousand of pounds, with the last three figures being omitted. Add 000 to figure following S, D, 2S, 2T, AUW, SWL, etc., for gross weight capacity. A blank space following the letter designator is used to indicate the runway can sustain aircraft with this type landing gear, although definite runway weight bearing capacity figures are not available, e.g., S, D. Applicable codes for typical gear configurations with S=Single, D=Dual, T=Triple and Q=Quadruple:

CURRENT	NEW	NEW DESCRIPTION
S	S	Single wheel type landing gear (DC3), (C47), (F15), etc.
D	D	Dual wheel type landing gear (BE1900), (B737), (A319), etc.
T	D	Dual wheel type landing gear (P3, C9).
ST	2S	Two single wheels in tandem type landing gear (C130).
TRT	2T	Two triple wheels in tandem type landing gear (C17), etc.
DT	2D	Two dual wheels in tandem type landing gear (B707), etc.
TT	2D	Two dual wheels in tandem type landing gear (B757, KC135).
SBTT	2D/D1	Two dual wheels in tandem/dual wheel body gear type landing gear (KC10).
None	2D/2D1	Two dual wheels in tandem/two dual wheels in tandem body gear type landing gear (A340-600).
DDT	2D/2D2	Two dual wheels in tandem/two dual wheels in double tandem body gear type landing gear (B747, E4).
TTT	3D	Three dual wheels in tandem type landing gear (B777), etc.
TT	D2	Dual wheel gear two struts per side main gear type landing gear (B52).
TD	C5	Complex dual wheel and quadruple wheel combination landing gear (C5).

AUW—All up weight. Maximum weight bearing capacity for any aircraft irrespective of landing gear configuration.

SWL—Single Wheel Loading. (This includes information submitted in terms of Equivalent Single Wheel Loading (ESWL) and Single Isolated Wheel Loading).

PSI—Pounds per square inch. PSI is the actual figure expressing maximum pounds per square inch runway support, e.g., (SWL 000/PSI 535).

Omission of weight bearing capacity indicates information unknown.

The ACN/PCN System is the ICAO standard method of reporting pavement strength for pavements with bearing strengths greater than 12,500 pounds. The Pavement Classification Number (PCN) is established by an engineering assessment of the runway. The PCN is for use in conjunction with an Aircraft Classification Number (ACN). Consult the Aircraft Flight Manual, Flight Information Handbook, or other appropriate source for ACN tables or charts. Currently, ACN data may not be available for all aircraft. If an ACN table or chart is available, the ACN can be calculated by taking into account the aircraft weight, the pavement type, and the subgrade category. For runways that have been evaluated under the ACN/PCN system, the PCN will be shown as a five-part code (e.g. PCN 80 R/B/W/T). Details of the coded format are as follows:

- (1) The PCN NUMBER—The reported PCN indicates that an aircraft with an ACN equal or less than the reported PCN can operate on the pavement subject to any limitation on the tire pressure.
- (2) The type of pavement:
 - R — Rigid
 - F — Flexible
- (3) The pavement subgrade category:
 - A — High
 - B — Medium
 - C — Low
 - D — Ultra-low
- (4) The maximum tire pressure authorized for the pavement:
 - W — High, no limit
 - X — Medium, limited to 217 psi
 - Y — Low, limited to 145 psi
 - Z — Very low, limited to 73 psi
- (5) Pavement evaluation method:
 - T — Technical evaluation
 - U — By experience of aircraft using the pavement

NOTE: Prior permission from the airport controlling authority is required when the ACN of the aircraft exceeds the published PCN or aircraft tire pressure exceeds the published limits.

RUNWAY LIGHTING

Lights are in operation sunset to sunrise. Lighting available by prior arrangement only or operating part of the night and/or pilot controlled lighting with specific operating hours are indicated under airport or military remarks. At USN/USMC facilities lights are available only during airport hours of operation. Since obstructions are usually lighted, obstruction lighting is not included in this code. Unlighted obstructions on or surrounding an airport will be noted in airport or military remarks. Runway lights nonstandard (NSTD) are systems for which the light fixtures are not FAA approved L-800 series: color, intensity, or spacing does not meet FAA standards. Nonstandard runway lights, VASI, or any other system not listed below will be shown in airport remarks or military service. Temporary, emergency or limited runway edge lighting such as flares, smudge pots, lanterns or portable runway lights will also be shown in airport remarks or military service. Types of lighting are shown with the runway or runway end they serve.

NSTD—Light system fails to meet FAA standards.

LIRL—Low Intensity Runway Lights.

MIRL—Medium Intensity Runway Lights.

HIRL—High Intensity Runway Lights.

RAIL—Runway Alignment Indicator Lights.

REIL—Runway End Identifier Lights.

CL—Centerline Lights.

TDZL—Touchdown Zone Lights.

ODALS—Omni Directional Approach Lighting System.

AF OVRN—Air Force Overrun 1000' Standard Approach Lighting System.

LDIN—Lead-In Lighting System.

MALS—Medium Intensity Approach Lighting System.

MALSF—Medium Intensity Approach Lighting System with Sequenced Flashing Lights.

MALSR—Medium Intensity Approach Lighting System with Runway Alignment Indicator Lights.

NOTE: Civil ALSF2 may be operated as SALR during favorable weather conditions. When runway edge lights are positioned more than 10 feet from the edge of the usable runway surface a remark will be added in the "Remarks" portion of the airport entry. This is applicable to Air Force, Air National Guard and Air Force Reserve Bases, and those joint civil/military airfields on which they are tenants.

SALS—Short Approach Lighting System.

SALSF—Short Approach Lighting System with Sequenced Flashing Lights.

SSALS—Simplified Short Approach Lighting System.

SSALF—Simplified Short Approach Lighting System with Sequenced Flashing Lights.

SSALR—Simplified Short Approach Lighting System with Runway Alignment Indicator Lights.

ALSAF—High Intensity Approach Lighting System with Sequenced Flashing Lights.

ALSF1—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category I, Configuration.

ALSF2—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category II, Configuration.

SF—Sequenced Flashing Lights.

OLS—Optical Landing System.

WAVE—OFF.

VISUAL GLIDESLOPE INDICATORS

APAP—A system of panels, which may or may not be lighted, used for alignment of approach path.

PNIL	APAP on left side of runway	PNIR	APAP on right side of runway
PAPI—Precision Approach Path Indicator			
P2L	2-identical light units placed on left side of runway	P4L	4-identical light units placed on left side of runway
P2R	2-identical light units placed on right side of runway	P4R	4-identical light units placed on right side of runway
PVASI—Pulsating/steady burning visual approach slope indicator, normally a single light unit projecting two colors.			
PSIL	PVASI on left side of runway	PSIR	PVASI on right side of runway
SAVASI—Simplified Abbreviated Visual Approach Slope Indicator			
S2L	2-box SAVASI on left side of runway	S2R	2-box SAVASI on right side of runway

TRCV—Tri-color visual approach slope indicator, normally a single light unit projecting three colors.

TRIL	TRCV on left side of runway	TRIR	TRCV on right side of runway
VASI—Visual Approach Slope Indicator			
V2L	2-box VASI on left side of runway	V6L	6-box VASI on left side of runway
V2R	2-box VASI on right side of runway	V6R	6-box VASI on right side of runway
V4L	4-box VASI on left side of runway	V12	12-box VASI on both sides of runway
V4R	4-box VASI on right side of runway	V16	16-box VASI on both sides of runway

NOTE: Approach slope angle and threshold crossing height will be shown when available; i.e., –GA 3.5° TCH 37'.

PILOT CONTROL OF AIRPORT LIGHTING

Key Mike	Function
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-Off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-Off)

Available systems will be indicated in the airport or military remarks, e.g., ACTIVATE HIRL Rwy 07–25, MALSR Rwy 07, and VASI Rwy 07–122.8.

Where the airport is not served by an instrument approach procedure and/or has an independent type system of different specification installed by the airport sponsor, descriptions of the type lights, method of control, and operating frequency will be explained in clear text. See AIM, “Basic Flight Information and ATC Procedures,” for detailed description of pilot control of airport lighting.

RUNWAY SLOPE

When available, runway slope data will only be provided for those airports with an approved FAA instrument approach procedure. Runway slope will be shown only when it is 0.3 percent or greater. On runways less than 8000 feet, the direction of the slope up will be indicated, e.g., 0.3% up NW. On runways 8000 feet or greater, the slope will be shown (up or down) on the runway end line, e.g., RWY 13: 0.3% up., RWY 21: Pole. Rgt tfc. 0.4% down.

RUNWAY END DATA

Information pertaining to the runway approach end such as approach lights, touchdown zone lights, runway end identification lights, visual glideslope indicators, displaced thresholds, controlling obstruction, and right hand traffic pattern, will be shown on the specific runway end. “Rgt tfc”—Right traffic indicates right turns should be made on landing and takeoff for specified runway end.

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for “Land and Hold Short Operations.” These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold–short operations and markings.

RUNWAY DECLARED DISTANCE INFORMATION

TORA—Take-off Run Available. The length of runway declared available and suitable for the ground run of an aeroplane take-off.

TODA—Take-off Distance Available. The length of the take-off run available plus the length of the clearway, if provided.

ASDA—Accelerate-Stop Distance Available. The length of the take-off run available plus the length of the stopway, if provided.

LDA—Landing Distance Available. The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

22 ARRESTING GEAR/SYSTEMS

Arresting gear is shown as it is located on the runway. The a–gear distance from the end of the appropriate runway (or into the overrun) is indicated in parentheses. A–Gear which has a bi–direction capability and can be utilized for emergency approach end engagement is indicated by a (B). The direction of engaging device is indicated by an arrow. Up to 15 minutes advance notice may be required for rigging A–Gear for approach and engagement. Airport listing may show availability of other than US Systems. This information is provided for emergency requirements only. Refer to current aircraft operating manuals for specific engagement weight and speed criteria based on aircraft structural restrictions and arresting system limitations.

Following is a list of current systems referenced in this publication identified by both Air Force and Navy terminology:

BI-DIRECTIONAL CABLE (B)

<u>TYPE</u>	<u>DESCRIPTION</u>
BAK-9	Rotary friction brake.
BAK-12A	Standard BAK-12 with 950 foot run out, 1-inch cable and 40,000 pound weight setting. Rotary friction brake.
BAK-12B	Extended BAK-12 with 1200 foot run, 1¼ inch Cable and 50,000 pounds weight setting. Rotary friction brake.
E28	Rotary Hydraulic (Water Brake).
M21	Rotary Hydraulic (Water Brake) Mobile.

The following device is used in conjunction with some aircraft arresting systems:

BAK-14	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to five seconds to fully raise the cable.)
H	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to one and one-half seconds to fully raise the cable.)

UNI-DIRECTIONAL CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>
MB60	Textile brake—an emergency one-time use, modular braking system employing the tearing of specially woven textile straps to absorb the kinetic energy.
E5/E5-1/E5-3	Chain Type. At USN/USMC stations E-5 A-GEAR systems are rated, e.g., E-5 RATING-13R-1100 HW (DRY), 31L/R-1200 STD (WET). This rating is a function of the A-GEAR chain weight and length and is used to determine the maximum aircraft engaging speed. A dry rating applies to a stabilized surface (dry or wet) while a wet rating takes into account the amount (if any) of wet overrun that is not capable of withstanding the aircraft weight. These ratings are published under Military Service.

FOREIGN CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>	<u>US EQUIVALENT</u>
44B-3H	Rotary Hydraulic (Water Brake)	
CHAG	Chain	E-5

UNI-DIRECTIONAL BARRIER

<u>TYPE</u>	<u>DESCRIPTION</u>
MA-1A	Web barrier between stanchions attached to a chain energy absorber.
BAK-15	Web barrier between stanchions attached to an energy absorber (water squeezer, rotary friction, chain). Designed for wing engagement.

NOTE: Landing short of the runway threshold on a runway with a BAK-15 in the underrun is a significant hazard. The barrier in the down position still protrudes several inches above the underrun. Aircraft contact with the barrier short of the runway threshold can cause damage to the barrier and substantial damage to the aircraft.

OTHER

<u>TYPE</u>	<u>DESCRIPTION</u>
EMAS	Engineered Material Arresting System, located beyond the departure end of the runway, consisting of high energy absorbing materials which will crush under the weight of an aircraft.

23 MILITARY SERVICE

Specific military services available at the airport are listed under this general heading. Remarks applicable to any military service are shown in the individual service listing.

24 JET AIRCRAFT STARTING UNITS (JASU)

The numeral preceding the type of unit indicates the number of units available. The absence of the numeral indicates ten or more units available. If the number of units is unknown, the number one will be shown. Absence of JASU designation indicates non-availability.

The following is a list of current JASU systems referenced in this publication:

USAF JASU (For variations in technical data, refer to T.O. 35-1-7.)

ELECTRICAL STARTING UNITS:

A/M32A-86	AC: 115/200v, 3 phase, 90 kva, 0.8 pf, 4 wire DC: 28v, 1500 amp, 72 kw (with TR pack)
MC-1A	AC: 115/208v, 400 cycle, 3 phase, 37.5 kva, 0.8 pf, 108 amp, 4 wire DC: 28v, 500 amp, 14 kw
MD-3	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3A	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3M	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 500 amp, 15 kw

MD-4 AC: 120/208v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 175 amp, "WYE" neutral ground, 4 wire, 120v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 303 amp, "DELTA" 3 wire, 120v, 400 cycle, 1 phase, 62.5 kva, 0.8 pf, 520 amp, 2 wire

AIR STARTING UNITS

AM32-95 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
 AM32A-95 150 +/- 5 lb/min @ 49 +/- 2 psia (35 +/- 2 psig)
 LASS 150 +/- 5 lb/min @ 49 +/- 2 psia
 MA-1A 82 lb/min (1123 cfm) at 130° air inlet temp, 45 psia (min) air outlet press
 MC-1 15 cfm, 3500 psia
 MC-1A 15 cfm, 3500 psia
 MC-2A 15 cfm, 200 psia
 MC-11 8,000 cu in cap, 4000 psig, 15 cfm

COMBINED AIR AND ELECTRICAL STARTING UNITS:

AGPU AC: 115/200v, 400 cycle, 3 phase, 30 kw gen
 DC: 28v, 700 amp
 AIR: 60 lb/min @ 40 psig @ sea level
 AM32A-60* AIR: 120 +/- 4 lb/min (1644 +/- 55 cfm) at 49 +/- 2 psia
 AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire, 120v, 1 phase, 25 kva
 DC: 28v, 500 amp, 15 kw
 AM32A-60A AIR: 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
 AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire
 DC: 28v, 200 amp, 5.6 kw
 AM32A-60B* AIR: 130 lb/min, 50 psia
 AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire
 DC: 28v, 200 amp, 5.6 kw

*NOTE: During combined air and electrical loads, the pneumatic circuitry takes preference and will limit the amount of electrical power available.

USN JASU

ELECTRICAL STARTING UNITS:

NC-8A/A1 DC: 500 amp constant, 750 amp intermittent, 28v;
 AC: 60 kva @ .8 pf, 115/200v, 3 phase, 400 Hz.
 NC-10A/A1/B/C DC: 750 amp constant, 1000 amp intermittent, 28v;
 AC: 90 kva, 115/200v, 3 phase, 400 Hz.

AIR STARTING UNITS:

GTC-85/GTE-85 120 lbs/min @ 45 psi.
 MSU-200NAV/A/U47A-5 204 lbs/min @ 56 psia.
 WELLS AIR START SYSTEM 180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. Simultaneous multiple start capability.

COMBINED AIR AND ELECTRICAL STARTING UNITS:

NCPP-105/RCPT 180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. 700 amp, 28v DC. 120/208v, 400 Hz AC, 30 kva.

JASU (ARMY)

59B2-1B 28v, 7.5 kw, 280 amp.

OTHER JASU

ELECTRICAL STARTING UNITS (DND):

CE12 AC 115/200v, 140 kva, 400 Hz, 3 phase
 CE13 AC 115/200v, 60 kva, 400 Hz, 3 phase
 CE14 AC/DC 115/200v, 140 kva, 400 Hz, 3 phase, 28vDC, 1500 amp
 CE15 DC 22-35v, 500 amp continuous 1100 amp intermittent
 CE16 DC 22-35v, 500 amp continuous 1100 amp intermittent soft start

AIR STARTING UNITS (DND):

CA2 ASA 45.5 psig, 116.4 lb/min

COMBINED AIR AND ELECTRICAL STARTING UNITS (DND)

CEA1 AC 120/208v, 60 kva, 400 Hz, 3 phase DC 28v, 75 amp
 AIR 112.5 lb/min, 47 psig

ELECTRICAL STARTING UNITS (OTHER)

C-26 28v 45kw 115-200v 15kw 380-800 Hz 1 phase 2 wire
 C-26-B, C-26-C 28v 45kw: Split Bus: 115-200v 15kw 380-800 Hz 1 phase 2 wire
 E3 DC 28v/10kw

AIR STARTING UNITS (OTHER):

A4 40 psi/2 lb/sec (LPAS Mk12, Mk12L, Mk12A, Mk1, Mk2B)
 MA-1 150 Air HP, 115 lb/min 50 psia
 MA-2 250 Air HP, 150 lb/min 75 psia

CARTRIDGE:

MXU-4A USAF

14 FUEL—MILITARY

Fuel available through US Military Base supply, DESC Into-Plane Contracts and/or reciprocal agreement is listed first and is followed by (Mil). At commercial airports where Into-Plane contracts are in place, the name of the refueling agent is shown. Military fuel should be used first if it is available. When military fuel cannot be obtained but Into-Plane contract fuel is available, Government aircraft must refuel with the contract fuel and applicable refueling agent to avoid any breach in contract terms and conditions. Fuel not available through the above is shown preceded by NC (no contract). When fuel is obtained from NC sources, local purchase procedures must be followed. The US Military Aircraft Identaplates DD Form 1896 (Jet Fuel), DD Form 1897 (Avgas) and AF Form 1245 (Avgas) are used at military installations only. The US Government Aviation Into-Plane Reimbursement (AIR) Card (currently issued by AVCARD) is the instrument to be used to obtain fuel under a DESC Into-Plane Contract and for NC purchases if the refueling agent at the commercial airport accepts the AVCARD. A current list of contract fuel locations is available online at www.desc.dla.mil/Static/ProductsAndServices.asp; click on the Commercial Airports button.

See legend item 14 for fuel code and description.

26 SUPPORTING FLUIDS AND SYSTEMS—MILITARY

CODE

ADI	Anti-Detonation Injection Fluid—Reciprocating Engine Aircraft.
W	Water Thrust Augmentation—Jet Aircraft.
WAI	Water-Alcohol Injection Type, Thrust Augmentation—Jet Aircraft.
SP	Single Point Refueling.
PRESAIR	Air Compressors rated 3,000 PSI or more.
De-Ice	Anti-icing/De-icing/Defrosting Fluid (MIL-A-8243).

OXYGEN:

LPOX	Low pressure oxygen servicing.
HPOX	High pressure oxygen servicing.
LHOX	Low and high pressure oxygen servicing.
LOX	Liquid oxygen servicing.
OXRB	Oxygen replacement bottles. (Maintained primarily at Naval stations for use in acft where oxygen can be replenished only by replacement of cylinders.)
OX	Indicates oxygen servicing when type of servicing is unknown.

NOTE: Combinations of above items is used to indicate complete oxygen servicing available;

LHOXRB	Low and high pressure oxygen servicing and replacement bottles;
LPOXRB	Low pressure oxygen replacement bottles only, etc.

NOTE: Aircraft will be serviced with oxygen procured under military specifications only. Aircraft will not be serviced with medical oxygen.

NITROGEN:

LPNIT	Low pressure nitrogen servicing.
HPNIT	High pressure nitrogen servicing.
LHNIT	Low and high pressure nitrogen servicing.

27 OIL—MILITARY

US AVIATION OILS (MIL SPECS):

CODE	GRADE, TYPE
O-113	1065, Reciprocating Engine Oil (MIL-L-6082)
O-117	1100, Reciprocating Engine Oil (MIL-L-6082)
O-117+	1100, O-117 plus cyclohexanone (MIL-L-6082)
O-123	1065, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type III)
O-128	1100, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type II)
O-132	1005, Jet Engine Oil (MIL-L-6081)
O-133	1010, Jet Engine Oil (MIL-L-6081)
O-147	None, MIL-L-6085A Lubricating Oil, Instrument, Synthetic
O-148	None, MIL-L-7808 (Synthetic Base) Turbine Engine Oil
O-149	None, Aircraft Turbine Engine Synthetic, 7.5c St
O-155	None, MIL-L-6086C, Aircraft, Medium Grade
O-156	None, MIL-L-23699 (Synthetic Base), Turboprop and Turboshaft Engines
JOAP/SOAP	Joint Oil Analysis Program. JOAP support is furnished during normal duty hours, other times on request. (JOAP and SOAP programs provide essentially the same service, JOAP is now the standard joint service supported program.)

28 TRANSIENT ALERT (TRAN ALERT)—MILITARY

Tran Alert service is considered to include all services required for normal aircraft turn-around, e.g., servicing (fuel, oil, oxygen, etc.), debriefing to determine requirements for maintenance, minor maintenance, inspection and parking assistance of transient aircraft. Drag chute repack, specialized maintenance, or extensive repairs will be provided within the capabilities and priorities of the base. Delays can be anticipated after normal duty hours/holidays/weekends regardless of the hours of transient maintenance operation. Pilots should not expect aircraft to be serviced for TURN-AROUNDS during time periods when servicing or maintenance manpower is not available. In the case of airports not operated exclusively by US military, the servicing indicated by the remarks will not always be available for US military

aircraft. When transient alert services are not shown, facilities are unknown. NO PRIORITY BASIS—means that transient alert services will be provided only after all the requirements for mission/tactical assigned aircraft have been accomplished.

29 AIRPORT REMARKS

The Attendance Schedule is the months, days and hours the airport is actually attended. Airport attendance does not mean watchman duties or telephone accessibility, but rather an attendant or operator on duty to provide at least minimum services (e.g., repairs, fuel, transportation).

Airport Remarks have been grouped in order of applicability. Airport remarks are limited to those items of information that are determined essential for operational use, i.e., conditions of a permanent or indefinite nature and conditions that will remain in effect for more than 30 days concerning aeronautical facilities, services, maintenance available, procedures or hazards, knowledge of which is essential for safe and efficient operation of aircraft. Information concerning permanent closing of a runway or taxiway will not be shown. A note "See Special Notices" shall be applied within this remarks section when a special notice applicable to the entry is contained in the Special Notices section of this publication.

Parachute Jumping indicates parachute jumping areas associated with the airport. See Parachute Jumping Area section of this publication for additional information.

Landing Fee indicates landing charges for private or non-revenue producing aircraft. In addition, fees may be charged for planes that remain over a couple of hours and buy no services, or at major airline terminals for all aircraft.

Note: Unless otherwise stated, remarks including runway ends refer to the runway's approach end.

30 MILITARY REMARKS

Military Remarks published at a joint Civil/Military facility are remarks that are applicable to the Military. At Military Facilities all remarks will be published under the heading Military Remarks. Remarks contained in this section may not be applicable to civil users. The first group of remarks is applicable to the primary operator of the airport. Remarks applicable to a tenant on the airport are shown preceded by the tenant organization, i.e., (A) (AF) (N) (ANG), etc. Military airports operate 24 hours unless otherwise specified. Airport operating hours are listed first (airport operating hours will only be listed if they are different than the airport attended hours or if the attended hours are unavailable) followed by pertinent remarks in order of applicability. Remarks will include information on restrictions, hazards, traffic pattern, noise abatement, customs/agriculture/immigration, and miscellaneous information applicable to the Military.

Type of restrictions:

CLOSED: When designated closed, the airport is restricted from use by all aircraft unless stated otherwise. Any closure applying to specific type of aircraft or operation will be so stated. USN/USMC/USAF airports are considered closed during non-operating hours. Closed airports may be utilized during an emergency provided there is a safe landing area.

OFFICIAL BUSINESS ONLY: The airfield is closed to all transient military aircraft for obtaining routine services such as fueling, passenger drop off or pickup, practice approaches, parking, etc. The airfield may be used by aircrews and aircraft if official government business (including civilian) must be conducted on or near the airfield and prior permission is received from the airfield manager.

AF OFFICIAL BUSINESS ONLY OR NAVY OFFICIAL BUSINESS ONLY: Indicates that the restriction applies only to service indicated.

PRIOR PERMISSION REQUIRED (PPR): Airport is closed to transient aircraft unless approval for operation is obtained from the appropriate commander through Chief, Airfield Management or Airfield Operations Officer. Official Business or PPR does not preclude the use of US Military airports as an alternate for IFR flights. If a non-US military airport is used as a weather alternate and requires a PPR, the PPR must be requested and confirmed before the flight departs. The purpose of PPR is to control volume and flow of traffic rather than to prohibit it. Prior permission is required for all aircraft requiring transient alert service outside the published transient alert duty hours. All aircraft carrying hazardous materials must obtain prior permission as outlined in AFJI 11-204, AR 95-27, OPNAVINST 3710.7.

Note: OFFICIAL BUSINESS ONLY AND PPR restrictions are not applicable to Special Air Mission (SAM) or Special Air Resource (SPAR) aircraft providing person or persons on board are designated Code 6 or higher as explained in AFJMAN 11-213, AR 95-11, OPNAVINST 3722-8J. Official Business Only or PPR do not preclude the use of the airport as an alternate for IFR flights.

31 WEATHER DATA SOURCES

Weather data sources will be listed alphabetically followed by their assigned frequencies and/or telephone number and hours of operation.

ASOS—Automated Surface Observing System. Reports the same as an AWOS-3 plus precipitation identification and intensity, and freezing rain occurrence (future enhancement).

AWOS—Automated Weather Observing System

AWOS-A—reports altimeter setting (all other information is advisory only).

AWOS-1—reports altimeter setting, wind data and usually temperature, dewpoint and density altitude.

AWOS-2—reports the same as AWOS-1 plus visibility.

AWOS-3—reports the same as AWOS-1 plus visibility and cloud/ceiling data.

See AIM, Basic Flight Information and ATC Procedures for detailed description of AWOS.

HIWAS—See RADIO AIDS TO NAVIGATION

LAWSR—Limited Aviation Weather Reporting Station where observers report cloud height, weather, obstructions to vision, temperature and dewpoint (in most cases), surface wind, altimeter and pertinent remarks.

LLWAS—indicates a Low Level Wind Shear Alert System consisting of a center field and several field perimeter anemometers.

SAWSR—identifies airports that have a Supplemental Aviation Weather Reporting Station available to pilots for current weather information.

SWSL—Supplemental Weather Service Location providing current local weather information via radio and telephone.

TDWR—indicates airports that have Terminal Doppler Weather Radar.

WSP—indicates airports that have Weather System Processor.

When the automated weather source is broadcast over an associated airport NAVAID frequency (see NAVAID line), it shall be indicated by a bold ASOS, AWOS, or HIWAS followed by the frequency, identifier and phone number, if available.

32 COMMUNICATIONS

Airport terminal control facilities and radio communications associated with the airport shall be shown. When the call sign is not the same as the airport name the call sign will be shown. Frequencies shall normally be shown in descending order with the primary frequency listed first. Frequencies will be listed, together with sectorization indicated by outbound radials, and hours of operation. Communications will be listed in sequence as follows:

Single Frequency Approach (SFA), Common Traffic Advisory Frequency (CTAF), Automatic Terminal Information Service (ATIS) and Aeronautical Advisory Stations (UNICOM) or (AUNICOM) along with their frequency is shown, where available, on the line following the heading "COMMUNICATIONS." When the CTAF and UNICOM frequencies are the same, the frequency will be shown as CTAF/UNICOM 122.8.

The FSS telephone nationwide is toll free 1-800-WX-BRIEF (1-800-992-7433). When the FSS is located on the field it will be indicated as "on arpt". Frequencies available at the FSS will follow in descending order. Remote Communications Outlet (RCO) providing service to the airport followed by the frequency and FSS RADIO name will be shown when available.

FSS's provide information on airport conditions, radio aids and other facilities, and process flight plans. Airport Advisory Service (AAS) is provided on the CTAF by FSS's for select non-tower airports or airports where the tower is not in operation.

(See AIM, Para 4-1-9 Traffic Advisory Practices at Airports Without Operating Control Towers or AC 90-42C.)

Aviation weather briefing service is provided by FSS specialists. Flight and weather briefing services are also available by calling the telephone numbers listed.

Remote Communications Outlet (RCO)—An unmanned air/ground communications facility that is remotely controlled and provides UHF or VHF communications capability to extend the service range of an FSS.

Civil Communications Frequencies—Civil communications frequencies used in the FSS air/ground system are operated on 122.0, 122.2, 123.6; emergency 121.5; plus receive-only on 122.1.

- a. 122.0 is assigned as the Enroute Flight Advisory Service frequency at selected FSS RADIO outlets.
- b. 122.2 is assigned as a common enroute frequency.
- c. 123.6 is assigned as the airport advisory frequency at select non-tower locations. At airports with a tower, FSS may provide airport advisories on the tower frequency when tower is closed.
- d. 122.1 is the primary receive-only frequency at VOR's.
- e. Some FSS's are assigned 50 kHz frequencies in the 122-126 MHz band (eg. 122.45). Pilots using the FSS A/G system should refer to this directory or appropriate charts to determine frequencies available at the FSS or remote facility through which they wish to communicate.

Emergency frequency 121.5 and 243.0 are available at all Flight Service Stations, most Towers, Approach Control and RADAR facilities.

Frequencies published followed by the letter "T" or "R", indicate that the facility will only transmit or receive respectively on that frequency. All radio aids to navigation (NAVAID) frequencies are transmit only.

TERMINAL SERVICES

SFA—Single Frequency Approach.

CTAF—A program designed to get all vehicles and aircraft at airports without an operating control tower on a common frequency.

ATIS—A continuous broadcast of recorded non-control information in selected terminal areas.

D-ATIS—Digital ATIS provides ATIS information in text form outside the standard reception range of conventional ATIS via landline & data link communications and voice message within range of existing transmitters.

AUNICOM—Automated UNICOM is a computerized, command response system that provides automated weather, radio check capability and airport advisory information selected from an automated menu by microphone clicks.

UNICOM—A non-government air/ground radio communications facility which may provide airport information.

PTD—Pilot to Dispatcher.

APP CON—Approach Control. The symbol ® indicates radar approach control.

TOWER—Control tower.

GCA—Ground Control Approach System.

GND CON—Ground Control.

GCO—Ground Communication Outlet—An unstaffed, remotely controlled, ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four "key clicks" on the

VHF radio to contact the appropriate ATC facility or six “key clicks” to contact the FSS. The GCO system is intended to be used only on the ground.

DEP CON—Departure Control. The symbol **(R)** indicates radar departure control.

CLNC DEL—Clearance Delivery.

PRE TAXI CLNC—Pre taxi clearance.

VFR ADVSY SVC—VFR Advisory Service. Service provided by Non-Radar Approach Control.

Advisory Service for VFR aircraft (upon a workload basis) ctc APP CON.

COMD POST—Command Post followed by the operator call sign in parenthesis.

PMSV—Pilot-to-Metro Service call sign, frequency and hours of operation, when full service is other than continuous.

PMSV installations at which weather observation service is available shall be indicated, following the frequency and/or hours of operation as “Wx obsn svc 1900-0000Z+” or “other times” may be used when no specific time is given. PMSV facilities manned by forecasters are considered “Full Service”. PMSV facilities manned by weather observers are listed as “Limited Service”.

OPS—Operations followed by the operator call sign in parenthesis.

CON

RANGE

FLT FLW—Flight Following

MEDIVAC

NOTE: Communication frequencies followed by the letter “X” indicate frequency available on request.

(33) AIRSPACE

Information concerning Class B, C, and part-time D and E surface area airspace shall be published with effective times.

Class D and E surface area airspace that is continuous as established by Rulemaking Docket will not be shown.

CLASS B—Radar Sequencing and Separation Service for all aircraft in CLASS B airspace.

CLASS C—Separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport.

TRSA—Radar Sequencing and Separation Service for participating VFR Aircraft within a Terminal Radar Service Area.

Class C, D, and E airspace described in this publication is that airspace usually consisting of a 5 NM radius core surface area that begins at the surface and extends upward to an altitude above the airport elevation (charted in MSL for Class C and Class D). Class E surface airspace normally extends from the surface up to but not including the overlying controlled airspace.

When part-time Class C or Class D airspace defaults to Class E, the core surface area becomes Class E. This will be formatted as:

AIRSPACE: CLASS C svc “times” ctc **APP CON** other times CLASS E:

or

AIRSPACE: CLASS D svc “times” other times CLASS E.

When a part-time Class C, Class D or Class E surface area defaults to Class G, the core surface area becomes Class G up to, but not including, the overlying controlled airspace. Normally, the overlying controlled airspace is Class E airspace beginning at either 700’ or 1200’ AGL. This will be formatted as:

AIRSPACE: CLASS C svc “times” ctc **APP CON** other times CLASS G, with CLASS E 700’ (or 1200’) AGL & abv:

or

AIRSPACE: CLASS D svc “times” other times CLASS G with CLASS E 700’ (or 1200’) AGL & abv:

or

AIRSPACE: CLASS E svc “times” other times CLASS G with CLASS E 700’ (or 1200’) AGL & abv.

NOTE: AIRSPACE SVC “TIMES” INCLUDE ALL ASSOCIATED ARRIVAL EXTENSIONS. Surface area arrival extensions for instrument approach procedures become part of the primary core surface area. These extensions may be either Class D or Class E airspace and are effective concurrent with the times of the primary core surface area. For example, when a part-time Class C, Class D or Class E surface area defaults to Class G, the associated arrival extensions will default to Class G at the same time. When a part-time Class C or Class D surface area defaults to Class E, the arrival extensions will remain in effect as Class E airspace.

NOTE: CLASS E AIRSPACE EXTENDING UPWARD FROM 700 FEET OR MORE ABOVE THE SURFACE, DESIGNATED IN CONJUNCTION WITH AN AIRPORT WITH AN APPROVED INSTRUMENT PROCEDURE.

Class E 700’ AGL (shown as magenta vignette on sectional charts) and 1200’ AGL (blue vignette) areas are designated when necessary to provide controlled airspace for transitioning to/from the terminal and enroute environments. Unless otherwise specified, these 700’/1200’ AGL Class E airspace areas remain in effect continuously, regardless of airport operating hours or surface area status. These transition areas should not be confused with surface areas or arrival extensions.

(See Chapter 3, AIRSPACE, in the Aeronautical Information Manual for further details)

34 RADIO AIDS TO NAVIGATION

The Airport/Facility Directory lists, by facility name, all Radio Aids to Navigation that appear on National Aeronautical Navigation Services Visual or IFR Aeronautical Charts and those upon which the FAA has approved an Instrument Approach Procedure, with exception of selected TACANs. Military TACAN information will be published for Military facilities contained in this publication. All VOR, VORTAC, TACAN, ILS and MLS equipment in the National Airspace System has an automatic monitoring and shutdown feature in the event of malfunction. Unmonitored, as used in this publication, for any navigational aid, means that monitoring personnel cannot observe the malfunction or shutdown signal. The NAVAID NOTAM file identifier will be shown as "NOTAM FILE IAD" and will be listed on the Radio Aids to Navigation line. When two or more NAVAIDS are listed and the NOTAM file identifier is different from that shown on the Radio Aids to Navigation line, it will be shown with the NAVAID listing. NOTAM file identifiers for ILSs and its components (e.g., NDB (LOM) are the same as the associated airports and are not repeated. Automated Surface Observing System (ASOS), Automated Weather Observing System (AWOS), and Hazardous Inflight Weather Advisory Service (HIWAS) will be shown when this service is broadcast over selected NAVAIDS.

NAVAID information is tabulated as indicated in the following sample:

NAME (L) **ABVORTAC** 117.55 **ABE** Chan 122(Y) N40°43.60' W75°27.30' 180°4.1 NM to fld. 1110/8E. **AWOS. HIWAS.**

↑ ↑ ↑ ↑ ↑ ↑ ↑

Class Frequency Identifier TACAN/DME Channel Geographical Position Site Elevation

Bearing and distance facility to center of airport Magnetic Variation Automated Weather Observing System Hazardous Inflight Weather Advisory Service

VOR unusable 020°-060° byd 26 NM blo 3,500'

Restriction within the normal altitude/range of the navigational aid (See primary alphabetical listing for restrictions on VORTAC and VOR/DME).

Note: Those DME channel numbers with a (Y) suffix require TACAN to be placed in the "Y" mode to receive distance information.

HIWAS—Hazardous Inflight Weather Advisory Service is a continuous broadcast of inflight weather advisories including summarized SIGMETs, convective SIGMETs, AIRMETs and urgent PIREPs. HIWAS is presently broadcast over selected VOR's throughout the U.S.

ASR/PAR—Indicates that Surveillance (ASR) or Precision (PAR) radar instrument approach minimums are published in the U.S. Terminal Procedures. Only part-time hours of operation will be shown.

RADIO CLASS DESIGNATIONS

VOR/DME/TACAN Standard Service Volume (SSV) Classifications

SSV Class	Altitudes	Distance (NM)
(T) Terminal	1000' to 12,000'	25
(L) Low Altitude	1000' to 18,000'	40
(H) High Altitude	1000' to 14,500'	40
	14,500' to 18,000'	100
	18,000' to 45,000'	130
	45,000' to 60,000'	100

NOTE: Additionally, (H) facilities provide (L) and (T) service volume and (L) facilities provide (T) service. Altitudes are with respect to the station's site elevation. Coverage is not available in a cone of airspace directly above the facility.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

The term VOR is, operationally, a general term covering the VHF omnidirectional bearing type of facility without regard to the fact that the power, the frequency protected service volume, the equipment configuration, and operational requirements may vary between facilities at different locations.

AB _____	Automatic Weather Broadcast.
DF _____	Direction Finding Service.
DME _____	UHF standard (TACAN compatible) distance measuring equipment.
DME(Y) _____	UHF standard (TACAN compatible) distance measuring equipment that require TACAN to be placed in the "Y" mode to receive DME.
GS _____	Glide slope.
H _____	Non-directional radio beacon (homing), power 50 watts to less than 2,000 watts (50 NM at all altitudes).
HH _____	Non-directional radio beacon (homing), power 2,000 watts or more (75 NM at all altitudes).
H-SAB _____	Non-directional radio beacons providing automatic transcribed weather service.
ILS _____	Instrument Landing System (voice, where available, on localizer channel).
IM _____	Inner marker.
ISMLS _____	Interim Standard Microwave Landing System.
LDA _____	Localizer Directional Aid.
LMM _____	Compass locator station when installed at middle marker site (15 NM at all altitudes).
LOM _____	Compass locator station when installed at outer marker site (15 NM at all altitudes).
MH _____	Non-directional radio beacon (homing) power less than 50 watts (25 NM at all altitudes).
MLS _____	Microwave Landing System.
MM _____	Middle marker.
OM _____	Outer marker.
S _____	Simultaneous range homing signal and/or voice.
SABH _____	Non-directional radio beacon not authorized for IFR or ATC. Provides automatic weather broadcasts.
SDF _____	Simplified Direction Facility.
TACAN _____	UHF navigational facility-omnidirectional course and distance information.
VOR _____	VHF navigational facility-omnidirectional course only.
VOR/DME _____	Collocated VOR navigational facility and UHF standard distance measuring equipment.
VORTAC _____	Collocated VOR and TACAN navigational facilities.
W _____	Without voice on radio facility frequency.
Z _____	VHF station location marker at a LF radio facility.

ILS FACILITY PERFORMANCE CLASSIFICATION CODES

Codes define the ability of an ILS to support autoland operations. The two portions of the code represent Official Category and farthest point along a Category I, II, or III approach that the Localizer meets Category III structure tolerances.

Official Category: I, II, or III; the lowest minima on published or unpublished procedures supported by the ILS.

Farthest point of satisfactory Category III Localizer performance for Category I, II, or III approaches: A – 4 NM prior to runway threshold, B – 3500 ft prior to runway threshold, C – glide angle dependent but generally 750–1000 ft prior to threshold, T – runway threshold, D – 3000 ft after runway threshold, and E – 2000 ft prior to stop end of runway.

ILS information is tabulated as indicated in the following sample:

ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.

ILS Facility Performance
Classification Code

FREQUENCY PAIRING PLAN AND MLS CHANNELING

MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL
500	108.10	18X	568	109.45	31Y	636	114.15	88Y
502	108.30	20X	570	109.55	32Y	638	114.25	89Y
504	108.50	22X	572	109.65	33Y	640	114.35	90Y
506	108.70	24X	574	109.75	34Y	642	114.45	91Y
508	108.90	26X	576	109.85	35Y	644	114.55	92Y
510	109.10	28X	578	109.95	36Y	646	114.65	93Y
512	109.30	30X	580	110.05	37Y	648	114.75	94Y
514	109.50	32X	582	110.15	38Y	650	114.85	95Y
516	109.70	34X	584	110.25	39Y	652	114.95	96Y
518	109.90	36X	586	110.35	40Y	654	115.05	97Y
520	110.10	38X	588	110.45	41Y	656	115.15	98Y
522	110.30	40X	590	110.55	42Y	658	115.25	99Y
524	110.50	42X	592	110.65	43Y	660	115.35	100Y
526	110.70	44X	594	110.75	44Y	662	115.45	101Y
528	110.90	46X	596	110.85	45Y	664	115.55	102Y
530	111.10	48X	598	110.95	46Y	666	115.65	103Y
532	111.30	50X	600	111.05	47Y	668	115.75	104Y
534	111.50	52X	602	111.15	48Y	670	115.85	105Y
536	111.70	54X	604	111.25	49Y	672	115.95	106Y
538	111.90	56X	606	111.35	50Y	674	116.05	107Y
540	108.05	17Y	608	111.45	51Y	676	116.15	108Y
542	108.15	18Y	610	111.55	52Y	678	116.25	109Y
544	108.25	19Y	612	111.65	53Y	680	116.35	110Y
546	108.35	20Y	614	111.75	54Y	682	116.45	111Y
548	108.45	21Y	616	111.85	55Y	684	116.55	112Y
550	108.55	22Y	618	111.95	56Y	686	116.65	113Y
552	108.65	23Y	620	113.35	80Y	688	116.75	114Y
554	108.75	24Y	622	113.45	81Y	690	116.85	115Y
556	108.85	25Y	624	113.55	82Y	692	116.95	116Y
558	108.95	26Y	626	113.65	83Y	694	117.05	117Y
560	109.05	27Y	628	113.75	84Y	696	117.15	118Y
562	109.15	28Y	630	113.85	85Y	698	117.25	119Y
564	109.25	29Y	632	113.95	86Y			
566	109.35	30Y	634	114.05	87Y			

FREQUENCY PAIRING PLAN AND MLS CHANNELING

The following is a list of paired VOR/ILS VHF frequencies with TACAN channels and MLS channels.

TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
2X	134.5	-	19Y	108.25	544	25X	108.80	-
2Y	134.55	-	20X	108.30	502	25Y	108.85	556
11X	135.4	-	20Y	108.35	546	26X	108.90	508
11Y	135.45	-	21X	108.40	-	26Y	108.95	558
12X	135.5	-	21Y	108.45	548	27X	109.00	-
12Y	135.55	-	22X	108.50	504	27Y	109.05	560
17X	108.00	-	22Y	108.55	550	28X	109.10	510
17Y	108.05	540	23X	108.60	-	28Y	109.15	562
18X	108.10	500	23Y	108.65	552	29X	109.20	-
18Y	108.15	542	24X	108.70	506	29Y	109.25	564
19X	108.20	-	24Y	108.75	554	30X	109.30	512

2

35 COMM/NAV/WEATHER REMARKS:
These remarks consist of pertinent information affecting the current status of communications, NAVAIDS and weather.

These remarks consist of pertinent information affecting the current status of communications, NAVAIDs and weather.

NW, 23 SEP 2010 to 18 NOV 201

ABERDEEN MUNI (U36) 2 SW UTC-7(-6DT) N42°55.27' W112°52.85'

SALT LAKE CITY

4470 B NOTAM FILE BOI


L-11C

RWY 06-24: H3650X50 (ASPH) MIRL**RWY 06:** Road.**RWY 24:** Fence.**AIRPORT REMARKS:** Attended irregularly Mon-Sat dalgt hrs.

Considerable agriculture ops during growing season. Irregular winter maintenance. +30' sprinkler and terrain at 230' from southwest end of rwy may be in position. Rwy 24 + 50' tree at 400', 125' left. ACTIVATE MIRL Rwy 06-24—CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE PIH.

POCATELLO (H) VORTACW 112.6 PIH Chan 73 N42°52.22'
W112°39.13' 270° 10.5 NM to fld. 4433/17E.

**ALLEN H TIGERT** (See SODA SPRINGS)**AMERICAN FALLS** (U01) 2 NE UTC-7(-6DT) N42°47.84' W112°49.51'

SALT LAKE CITY

4419 B S4 **FUEL** 100LL, JET A NOTAM FILE BOI


L-11C

RWY 03-21: H4900X50 (ASPH) MIRL**RWY 03:** Fence.**RWY 21:** TRCV(TRIL)—GA 3.5° TCH 24'. Hill.

AIRPORT REMARKS: Attended 1500-0100Z±. Ultralight, agriculture acft and helicopter ops during summer months. No line of sight between rwy ends. Irregular snow removal. ACTIVATE MIRL Rwy 03-21 and TRCV Rwy 21—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE PIH.

POCATELLO (H) VORTACW 112.6 PIH Chan 73 N42°52.22'
W112°39.13' 223° 8.8 NM to fld. 4433/17E.

**ANTELOPE VALLEY** (See GROUSE)

ARCO-BUTTE CO (AOC) 3 SW UTC-7(-6DT) N43°36.21' W113°20.06'

5332 B S2 NOTAM FILE BOI

RWY 06-24: H6600X75 (ASPH) S-300 MIRL

RWY 06: REIL. PAPI (P2L)—GA 3.0° TCH 40'.

RWY 24: REIL. PAPI(P2L)—GA 3.0° TCH 40'. P-line.

AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 06-24, REIL Rwy 06 and Rwy 24 and PAPI Rwy 06 and Rwy 24—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

SALT LAKE CENTER APP/DEP CON 128.35

RADIO AIDS TO NAVIGATION: NOTAM FILE PIH.


POCATELLO (H) VORTACW 112.6 PIH Chan 73 N42°52.22'

W112°39.13' 309° 53.2 NM to fld. 4433/17E.

SALT LAKE CITY

H-3D, L-11C

IAP

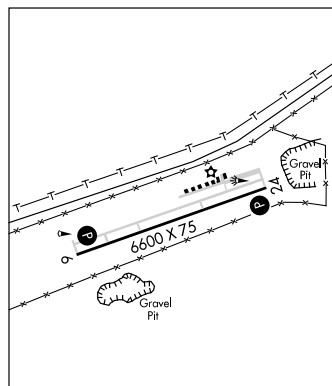

ASHTON N44°33.75' W111°26.68'

RCO 123.625 (BOISE RADIO)

SALT LAKE CITY

L-13C

ATLANTA

ATLANTA (55H) 1 NW UTC-7(-6DT) N43°48.81' W115°08.10'

5500 NOTAM FILE BOI


RWY 16-34: 2460X75 (TURF-DIRT)

RWY 16: Tree. **RWY 34:** Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. No winter maintenance. Recommended for use by mountain proficient pilots using high performance aircraft. Arpt is located in mountainous area; high timbered ridges limit maneuvering area. Land Rwy 34, depart Rwy 16. Approach up Boise River making right circling pattern over valley to check traffic at Greene arpt. Depart with right turnout down Boise River. Announce Intentions on 122.9. No go-around due to rising terrain and trees. Rwy 16-34 edges and Rwy 34 thld marked with white rocks. Rwy 16 thld not defined. Ground vehicle traffic has access to rwy. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

SALT LAKE CITY

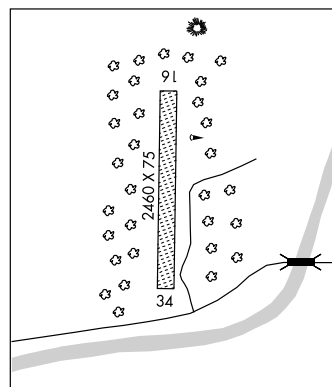

GRAHAM USFS (U45) 11 NW UTC-7(-6DT) N43°57.31' W115°16.36'

5726 NOTAM FILE BOI

RWY 18-36: 2900X50 (TURF-GRVL)

RWY 18: Trees. **RWY 36:** Road.

AIRPORT REMARKS: Unattended. Big game animals on and in vicinity of arpt. No winter maintenance. Recommend ldg Rwy 36; txf Rwy 18 when wind conditions allow. No line of sight between rwy ends. Rwy 18-36 lower one third of rwy soft and unusable during early spring. Rwy 18-36 thlds marked with rocks. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

SALT LAKE CITY

WEATHERBY USFS (52U) 9 NW UTC-7(-6DT) N43°49.49' W115°19.91'

SALT LAKE CITY

4494 NOTAM FILE BOI

RWY 03-21: 2200X60 (TURF-GRVL)**RWY 03:** Tree. **RWY 21:** Trees.

AIRPORT REMARKS: Unattended. No winter maintenance. Arpt located in narrow river canyon subject to local turbulence caused by the terrain configuration. Recommended ldg Rwy 03; tkf Rwy 21 when wind conditions allow. Rwy 03-21 thlds and edges marked with unpainted rocks. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

ATOMIC CITY

BIG SOUTHERN BUTTE (U46) 10 W UTC-7(-6DT) N43°25.96' W113°03.33'

SALT LAKE CITY

5073 NOTAM FILE BOI

RWY 01-19: 2600X110 (DIRT)**RWY 01:** Ground. **RWY 19:** Road.

AIRPORT REMARKS: Unattended. Livestock on and in vicinity of arpt. Rwy 01-19 surface may be poor due to damage by livestock, ground vehicles and rodents. Rwy 01-19 +1.5' berm and -1' ditch adjacent to entire perimeter of rwy. No winter maintenance. Rwy 01-19 edges and thlds marked with white rock.

COMMUNICATIONS: CTAF 122.9

COXS WELL (U48) 23 SW UTC-7(-6DT) N43°13.07' W113°13.65'

SALT LAKE CITY

5034 NOTAM FILE BOI

RWY 08-26: 2700X100 (TURF)**RWY 08:** Road. **RWY 26:** Fence.

AIRPORT REMARKS: Unattended. Rwy 08-26 surface may be poor due to damage by livestock, ground vehicles and rodents. No winter maintenance. Rwy 08-26 edges and thlds marked with white rock.

COMMUNICATIONS: CTAF 122.9

MIDWAY (U37) 1 N UTC-7(-6DT) N43°27.22' W112°48.44'

SALT LAKE CITY

5017 NOTAM FILE BOI

RWY 02-20: 3800X175 (GRVL-DIRT)**RWY 02:** Road. **RWY 20:** Road.

AIRPORT REMARKS: Unattended. No winter maintenance. First 1500' of Rwy 02 is dirt, remainder is gravel. Rwy 02-20 edges and thlds marked with white rocks.

COMMUNICATIONS: CTAF 122.9

BANCROFT MUNI (U51) 1 E UTC-7(-6DT) N42°43.25' W111°52.05'

SALT LAKE CITY

5435 NOTAM FILE BOI

RWY 07-25: 3280X30 (GRVL)**RWY 07:** Road.

AIRPORT REMARKS: Unattended. CAUTION: Unmarked turf crosswind landing area located SE adjacent to rwy. No winter maintenance.

COMMUNICATIONS: CTAF 122.9

BEAR LAKE CO (See PARIS)

BEAR TRAP (See MINIDOKA)

BERNARD USFS (U54) 0 NE UTC-7(-6DT) N44°58.78' W114°44.09'

GREAT FALLS

3626 NOTAM FILE BOI

RWY 17-35: 1900X150 (TURF-DIRT)**RWY 17:** Hill. **RWY 35:** Hill.

AIRPORT REMARKS: Unattended. No winter maintenance. Land Rwy 35, tkf Rwy 17, no touch and go landing or stop and go ldgs. Go arounds not recommended due to steep rising terrain off N end of Rwy 17. Rwy 17-35 NSTD, rwy edges and thresholds marked with white rock markers. Flying B private arpt located ½ mile upstream. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

BIG CREEK (U60) 0 NE UTC-7(-6DT) N45°07.99' W115°19.31'

GREAT FALLS

5743 NOTAM FILE BOI

RWY 01-19: 3550X110 (TURF)

RWY 01: Road. RWY 19: Trees.

AIRPORT REMARKS: Unattended. Big game animals on and in vicinity of arpt. Open to ski equipped acft in winter; acft use sides of strip during ski operations. Recommend land to south, takeoff to north when conditions allow. No winter maintenance. Be alert for sprinklers on rwy. Rwy 01-19 edges and thlds marked with white rock. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

BIG CREEK RANGER STATION

CABIN CREEK USFS (I08) 17 E UTC-7(-6DT) N45°08.61' W114°55.74'

GREAT FALLS

4289 NOTAM FILE BOI

RWY 02-20: 1750X40 (TURF-DIRT)

RWY 02: Tree. RWY 20: Hill.

AIRPORT REMARKS: Unattended. Big game animals and livestock on and invof rwy. Land Rwy 02, takeoff Rwy 20, go around not possible due to high terrain at end of Rwy 20. Rwy 02-20 15' wide bare dirt strip down center of rwy. No telephone avbl at arpt. Rubber water bar strips on rwy.

COMMUNICATIONS: CTAF 122.9

BIG SOUTHERN BUTTE (See ATOMIC CITY)

BLACKFOOT

McCARLEY FLD (U02) 1 N UTC-7(-6DT) N43°12.56' W112°20.98'

SALT LAKE CITY

4488 B S4 FUEL 100LL, JET A NOTAM FILE BOI

L-11C

RWY 01-19: H4314X75 (ASPH) S-12.5 MIRL

IAP

RWY 01: PAPI(P2L)—GA 3.0° TCH 40'. Fence.

RWY 19: PAPI(P2L)—GA 3.0° TCH 37'. Tree.

AIRPORT REMARKS: Attended Mon-Sat 1500-0000Z±. Considerable air ground ops during growing season.

COMMUNICATIONS: CTAF/UNICOM 122.8

SALT LAKE CENTER APP/DEP CON 128.35

RADIO AIDS TO NAVIGATION: NOTAM FILE PIH.


POCATELLO (H) VORTACW 112.6 PIH Chan 73 N42°52.22'

W112°39.13' 016° 24.3 NM to fld. 4433/17E.

IDAHO FALLS (H) VORW/DME 113.85 IDA Chan 85(Y)

N43°31.14' W112°03.84' 199° 22.4 NM to fld.

4724/15E. NOTAM FILE IDA.

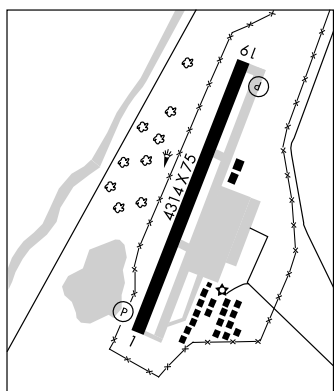

BLISS N42°54.99' W114°47.05'.

SALT LAKE CITY

RCO 122.4 (BOISE RADIO)

L-11C

BOISE AIR TERMINAL (GOWEN FLD) (BOI) 3 S UTC-7(-6DT) N43°33.86' W116°13.37'

SALT LAKE CITY

2871 B S2 FUEL 100LL, JET A1 + OX 1, 3 AOE Class I, ARFF Index B

H-1C, 3C, L-11B

NOTAM FILE BOI

IAP, AD

RWY 10L-28R: H10000X150 (ASPH-GRVD) S-100, D-210,

2S-175, 2D-446, 2D/2D2-947 HIRL

RWY 10L: REIL. VASI(V4L)—GA 3.0° TCH 53'. Antenna. 0.5% up.

RWY 28R: VASI(V4L)—GA 3.0° TCH 52'. Rgt tfc. 0.3% down.

RWY 10R-28L: H9763X150 (ASPH-PFC) S-100, D-210, 2S-175,

2D-430, 2D/2D2-994 HIRL CL

RWY 10R: SSALR. TDZL. VASI(V4L)—GA 3.0° TCH 55'. Rgt tfc.

0.5% up.

RWY 28L: MALS. TDZL. VASI(V4L)—GA 3.0° TCH 50'.

AIRPORT REMARKS: Attended continuously. Extensive copter operations

surface to 3500' within 1 NM E and W and 5 NM S of Rwy

10R-28L. Moderate migratory bird activity within 5 NM of the arpt

Oct-Mar. Security requires PPR with fixed base operator due to

locked gates and fencing between hours 0500-1400Z† for

ingress/egress to arpt. Portions of Twy A and the northwest ramp

not visible to twr. Do not use Twy Z for tkr roll on Rwy 10L. Rwy

28R midfield runway visual range avbl. Rwy 10R and Rwy 28L

touchdown runway visual range avbl. Rwy 10R rollout runway

visual range avbl. Flight Notification Service (ADCUS) available

Mon-Fri 1500-0000Z†, weekends if notified by Thur 0000Z†.

WEATHER DATA SOURCES: ASOS (208) 388-4640

COMMUNICATIONS: D-ATIS 123.9 UNICOM 122.95

BOISE RCO 122.6 122.2 (BOISE RADIO)

Ⓡ APP/DEP CON 126.9 (North) 119.6 (South)

TOWER 118.1 119.0 GND CON 121.7 CLNC DEL 125.9

AIRSPACE: CLASS C svc etc APP CON

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

(H) VORTACW 113.3 BOI Chan 80 N43°33.17' W116°11.53' 281° 1.5 NM to fld. 2876/17E.

VOR portion unusable:

001°-044° byd 22 NM blo 11,000'

001°-044° byd 32 NM blo 14,500'

045°-071° byd 32 NM blo 12,500'

072°-084° byd 32 NM blo 10,500'

DME portion unusable:

010°-060° byd 12 NM blo 13,000'

010°-060° byd 27 NM blo 15,500'

348°-010° byd 20 NM blo 13,000'

348°-010° byd 27 NM blo 15,500'

113°-155° byd 30 NM blo 7,000'

USTIK NDB (HW/LOM) 359 BO N43°35.81' W116°18.91' 099° 4.5 NM to fld.

ILS/DME 110.15 I-AAD Chan 38(Y) Rwy 28R. DME unusable byd 10 NM blo 6000', byd 12 NM blo


5500', byd 13 NM blo 6200', byd 16 NM blo 6000'. GS unusable byd 6 NM blo 4700'. LOC unusable byd 10

NM blo 6000', byd 12 NM blo 5500', byd 13 NM blo 6200', byd 16 NM blo 6000', byd 20° right of course

ILS/DME 111.1 I-BOI Chan 48 Rwy 10R. Class IIE. LOM USTIK NDB. Localizer backcourse

unusable byd 10° north and south side of course. Localizer backcourse unusable byd 10 NM blo 5900' and

byd 15.1 NM blo 6800'.



BONNERS FERRY**BOUNDARY CO** (65S) 2 NE UTC-8(-7DT) N48°43.56' W116°17.71'

GREAT FALLS

2337 B S3 FUEL 100LL, JET A NOTAM FILE BOI

L-13B

RWY 02-20: H4002X75 (ASPH) S-25 MIRL

IAP

RWY 20: VASI(V2L)—GA 4.0° TCH 31'. Road.

AIRPORT REMARKS: Attended Mon-Sat 1600-0100Z†, Sun

1600-2100Z†. ACTIVATE MIRL Rwy 02-20, VASI Rwy 20—CTAF.


COMMUNICATIONS: CTAF/UNICOM 123.0

SEATTLE CENTER APP/DEP CON 123.95

RADIO AIDS TO NAVIGATION: NOTAM FILE MLP.

MULLAN PASS (H) VORW/DME 117.8 MLP Chan 125 47°27.42'

W115°38.76' 321° 80.5 NM to fld. 6100/20E. HIWAS.

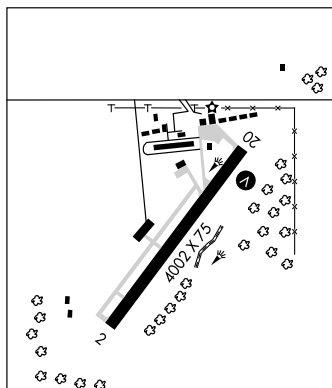**BOUNDARY CO** (See BONNERS FERRY)**BROOKS SPB** (See COEUR D'ALENE)**BRUCE MEADOWS** (See STANLEY)**BUHL MUNI** (U03) 2 W UTC-7(-6DT) N42°35.49' W114°47.80'

SALT LAKE CITY

3660 B S4 FUEL 100LL, MOGAS NOTAM FILE BOI

L-11C

RWY 09-27: H3900X60 (ASPH) S-12.5 LIRL

RWY 09: P-line.

RWY 27: Hill.

AIRPORT REMARKS: Attended Tue-Sat 1530-0000Z†. Phone

208-543-8539 for svc when arpt unattended. Limit acft on Twy B


and Twy C to 50' wingspan. ACTIVATE LIRL Rwy 09-27—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE TWF.

TWIN FALLS (L) VORTACW 115.8 TWF Chan 105 N42°28.79'

W114°29.37' 278° 15.2 NM to fld. 4140/18E.

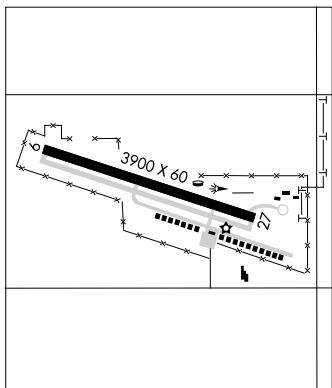**BURLEY** N42°34.82' W113°51.95' NOTAM FILE BYI.

SALT LAKE CITY

(L) VORW/DME 114.1 BYI Chan 88 100° 4.8 NM to Burley Muni. 4230/18E.

H-3D, L-11C

VOR/DME unusable

120°-150° byd 30 NM blo 15,000'

210°-230° byd 29 NM blo 11,000'

210°-230° byd 10 NM blo 7,000'

210°-230° byd 34 NM blo 13,000'

210°-230° byd 23 NM blo 8,800'

BURLEY MUNI (BYI) 1 NE UTC-7(-6DT) N42°32.56' W113°46.29'

4150 B S4 FUEL 100LL, JET A OX 2 NOTAM FILE BYI
RWY 02-20: H4094X80 (ASPH) S-43, D-60 MIRL 0.3% up SW

RWY 02: VASI(V4L)—GA 3.0° TCH 40'. Thld dsplcd 620'. Road.

RWY 20: REIL. VASI(V2R)—GA 3.0° TCH 24'. Thld dsplcd 300'.

Trees.

RWY 06-24: H4067X75 (ASPH) S-23 MIRL

RWY 06: Thld dsplcd 410'. Railroad.

RWY 24: VASI(V2R)—GA 3.0° TCH 47'. Poles.

AIRPORT REMARKS: Attended May-Oct 1500-0000Z†, Nov-Apr Mon-Fri

1500-0000Z†, Nov-Apr Sat 1500-1900Z†. Birds in vicinity of all
rwys, especially apch end Rwy 20 and apch end Rwy 24.

Agricultural activity on and infov all rwys Apr-Oct. Marked helipad

on ramp in front of FBO building. ACTIVATE MIRL Rwy 02-20 and

Rwy 06-24—CTAF. VASI Rwy 02, Rwy 20 and Rwy 24 opr

continuously.

WEATHER DATA SOURCES: ASOS 135.575 (208) 677-3604.

COMMUNICATIONS: CTAF 122.9


CONNERS RCO 122.05 (BOISE RADIO)

TWIN FALLS APP/DEP CON 126.7 (1300-0400Z†)

SALT LAKE CENTER APP/DEP CON 118.05 (0400-1300Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE BYI.

(L) VORW/DME 114.1 BYI Chan 88 N42°34.82' W113°51.95' 100° 4.8 NM to fld. 4230/18E.



SALT LAKE CITY

L-11C

IAP

CABIN CREEK USFS (See BIG CREEK RANGER STATION)

CALDWELL INDUSTRIAL (EUL) 3 SE UTC-7(-6DT) N43°38.51' W116°38.15'

2432 B S4 FUEL 100LL, JET A NOTAM FILE EUL

RWY 12-30: H5500X100 (ASPH) S-72, D-86, 2S-109 MIRL

RWY 12: PAPI(P4L)—GA 3.0° TCH 42'. Road.

RWY 30: PAPI(P4L)—GA 3.0° TCH 45'. Rgt tfc.

AIRPORT REMARKS: Attended Mar-Oct 1500-0200Z†, Nov-Feb

1500-0000Z†. Parachute Jumping. + 363' radio tower located

1.4 miles north of aprt. PAPI Rwy 12 and Rwy 30 opr continuously.

MIRL Rwy 12-30 ACTIVATE—CTAF.

WEATHER DATA SOURCES: AWOS-3 135.075 (208) 454-3953.

COMMUNICATIONS: CTAF/UNICOM 122.7

SQUAW BUTTE RCO 122.45 (BOISE RADIO)

® BOISE APP/DEP CON 119.6


RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

BOISE (H) VORTACW 113.3 BOI Chan 80 N43°33.17'

W116°11.53' 269° 20.1 NM to fld. 2876/17E.

MERIDIAN NDB (MHW) 238 MPA N43°36.20' W116°32.34'

283° 4.8 NM to fld.



SALT LAKE CITY

H-1C, L-11B

IAP

CAMAS CO (See FAIRFIELD)

CAREY (U65) 0 E UTC-7(-6DT) N43°18.53' W113°56.16'

4783 NOTAM FILE BOI

RWY 07-25: 2650X170 (TURF)

RWY 07: Fence. RWY 25: Fence.

AIRPORT REMARKS: Unattended. Recommend land Rwy 25, tkf Rwy 07 when wind conditions permit. Be alert for
sprinklers on rwy. Rwy 07-25 edges and thlds marked with concrete markers.

COMMUNICATIONS: CTAF 122.9

SALT LAKE CITY

CASCADE (U7Ø) 2 SE UTC-7(-6DT) N44°29.54' W116°00.89'

4742 B S6 **FUEL** 100LL, JET A OX 2 NOTAM FILE BOI

RWY 12-30: H4300X60 (ASPH) S-12.5 MIRL

RWY 30: Fence. Rgt tfc.

AIRPORT REMARKS: Attended Dec-Apr 1600-0000Z±, May-Nov 1500-0100Z±. To avoid apch/dep over town; land Rwy 30 and dep Rwy 12 when wind conditions permit. Rwy 12 and Rwy 30 rwy numbers and centerline not visible. Retro reflective reflectors on twys and ramp edges.


COMMUNICATIONS: CTAF 122.9

RCO 122.35 (BOISE RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE MYL.

DONNELLY (H) VORTACW 116.2 DNJ Chan 109 N44°46.03' W116°12.38' 134° 18.4 NM to fld. 7333/19E.

SALT LAKE CITY
L-13B



CAVANAUGH BAY (See COOLIN)

CAVANAUGH BAY

TANGLEFOOT SPB (D28) 1 NW UTC-8(-7DT) N48°32.33' W116°49.93'

GREAT FALLS

2438 NOTAM FILE BOI

WATERWAY 15-33: 10000X2000 (WATER)

WATERWAY 15: Rgt tfc.

SEAPLANE REMARKS: Attended Apr-Oct dawn-dusk. Tie downs available at floating docks; parking avbl on beach. Rwy 15-33 +5' no wake buoy located in ldg area. Recommend landing seaplane waterway 15; departure seaplane waterway 33, when winds permit. Cavanaugh Bay arpt located adjacent south, announce intentions—CTAF.

COMMUNICATIONS: CTAF 122.9

CHALLIS

CHALLIS (LLJ) 1 NE UTC-7(-6DT) N44°31.42' W114°13.08'

GREAT FALLS
L-13B

5072 B S4 **FUEL** 100, JET A NOTAM FILE LLJ

RWY 16-34: H4600X60 (ASPH) S-30 MIRL

RWY 16: Fence.

RWY 34: PAPI(P4L)—GA 3.0° TCH 40'. P-Line.


AIRPORT REMARKS: Attended 1400-0000Z±. Deer on and in vicinity of arpt. Be alert helicopter ops adjacent southeast end of arpt. Recommend land Rwy 16, tkf Rwy 34 when wind conditions permit.

WEATHER DATA SOURCES: ASOS 119.275 (208) 879-5121. SAWRS

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE SMN.

SALMON (H) VORW/DME 113.5 LKT Chan 82 N45°01.28' W114°05.06' 173° 30.4 NM to fld. 9258/18E.

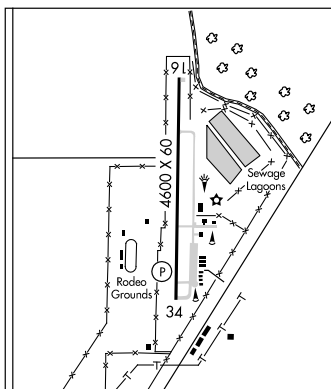

UPPER LOON CREEK USFS (U72) 26 NW UTC-7(-6DT) N44°35.49' W114°49.39'

GREAT FALLS

5500 NOTAM FILE BOI

RWY 04-22: 2500X75 (TURF-DIRT)

RWY 04: Tree. **RWY 22:** Trees.

AIRPORT REMARKS: Unattended. Recommend land Rwy 22; Tkf Rwy 04 when wind conditions permit. No winter maintenance. Recommended for experienced mountain pilots only. Rwy 04-22 edges and thlds marked with white rocks.

COMMUNICATIONS: CTAF 122.9

CHAMBERLAIN USFS (See CHAMBERLAIN GUARD STATION)**CHAMBERLAIN GUARD STATION****CHAMBERLAIN USFS** (U79) 0 E UTC-7(-6DT) N45°22.74' W115°11.81'**GREAT FALLS**

5765 NOTAM FILE BOI

RWY 07-25: 4100X200 (TURF-DIRT)**RWY 07:** Trees. **RWY 25:** Tree.**RWY 15-33:** 2700X140 (TURF)**RWY 15:** Hill. **RWY 33:** Trees.

AIRPORT REMARKS: Unattended. Rwy 07-25 W 500' CLOSED indef. Rwy 07-25 rough sfc. Rwy 15-33 rough and uneven surface. No twy available. Arpt subject to temporary closure early spring due to soft rwys. Rwy 07-25 and Rwy 15-33 thlds marked and rwys outlined with yellow rocks. Rwy 15-33 has +2' pipe and -2' ditch across rwy North of rwy 07-25 intersection. No twy from rwy 15-33 to Campgrounds. Rwy 15 120' timbered hill 1200' on centerline. Extensive rodent activity on both rwys. No telephone avbl at arpt. Private Stone Breaker Arpt located 1 NM NE of Chamberlain USFS.

COMMUNICATIONS: CTAF 122.9**COEUR D'ALENE****BROOKS SPB** (S76) 0 SW UTC-8(-7DT) N47°40.33' W116°47.16'**GREAT FALLS**2125 **FUEL** 100LL NOTAM FILE BOI**WATERWAY 11-29:** 15000X2000 (WATER)**WATERWAY 11:** Rgt tfc.**WATERWAY 15-33:** 15000X2000 (WATER)**WATERWAY 15:** Rgt tfc.

SEAPLANE REMARKS: Attended Mar-Oct 1700-dusk. Heavy boat tfc and parasail activity on and in vicinity of seaplane base ldg area. Fly patterns over lake, do not overfly city. Helicopter ops in vicinity of Seaplane Base. Ultralight acft operate in vicinity of SPB landing area. Adjacent boat marina may have dock space avbl.

COMMUNICATIONS: CTAF 122.9**COEUR D'ALENE-PAPPY BOYINGTON FLD** (COE) 9 NW UTC-8(-7DT)

N47°46.46' W116°49.18'

GREAT FALLS2320 B S4 **FUEL** 100, JET A OX 1, 2, 3, 4 Class IV, ARFF Index A NOTAM FILE COE**H-1C, L-13B****RWY 05-23:** H7400X100 (ASPH-GRVD) S-57, D-95, 2S-121, 2D-165 HIRL 0.6% up NE**IAP****RWY 05:** MALSR. PAPI(P4R)—GA 3.0° TCH 56'.**RWY 23:** REIL. PAPI(P4R)—GA 3.0° TCH 50'.**RWY 01-19:** H5400X75 (ASPH) S-50, D-83, 2S-105, 2D-150

MIRL 0.3% up N

RWY 01: REIL. PAPI(P2L)—GA 3.0° TCH 39'. Rgt tfc.**RWY 19:** PAPI(P2L)—GA 3.0° TCH 41'.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 01:** TORA-5400 TODA-5400 ASDA-5400 LDA-5400**RWY 05:** TORA-7400 TODA-7400 ASDA-7400 LDA-7400**RWY 19:** TORA-5400 TODA-5400 ASDA-5400 LDA-5400**RWY 23:** TORA-7400 TODA-7400 ASDA-7400 LDA-7400


AIRPORT REMARKS: Attended Mon-Fri 1500-0100Z+. For after hrs fuel-self svc avbl or call 208-772-6404, 208-661-4174, 208-661-7449, 208-699-5433. Self svc fuel avbl with credit card. 48 hr PPR for unscheduled ops with more than 30 passenger seats call arpt manager 208-446-1860. Migratory birds on and invof arpt Oct-Nov. Remote cntl airstrip is 2.3 miles west AER 05. Arpt conditions avbl on AWOS. Rwy 05 NSTD MALSR, thld bar extends 5' byd rwy edge lgts each side. ACTIVATE MIRL Rwy 01-19, HIRL Rwy 05-23, REIL Rwy 01 and Rwy 23, MALSR Rwy 05 and PAPI Rwy 01, Rwy 19, Rwy 05, and Rwy 23—CTAF. REIL Rwy 23 opr only when HIRL on high ints.

WEATHER DATA SOURCES: AWOS-3 135.075 (208) 772-8215.**HIWAS** 108.8 COE.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RCO** 122.05 (BOISE RADIO)**R** SPOKANE APP/DEP CON 132.1**AIRSPACE:** CLASS E svc continuous.**RADIO AIDS TO NAVIGATION:** NOTAM FILE COE.(T) VORW/DME 108.8 COE Chan 25 N47°46.42' W116°49.24' at fld. 2290/19E. **HIWAS.**

DME portion unusable:

220°-240° byd 15 NM

280°-315° byd 15 NM blo 11,000'.

POST FALLS NDB (MHW) 347 LEN N47°44.57' W116°57.66' 053° 6.0 NM to fld.**ILS** 110.7 I-COE Rwy 05 Class ID. Post Falls NDB. Localizer unusable 25° left and right of course.

MAGEE (S77) 23 NE UTC-8(-7DT) N47°50.24' W116°15.81'

GREAT FALLS

3002 NOTAM FILE BOI

Rwy 18-36: 2450X150 (TURF)

Rwy 18: Thld dsplcd 300'. Brush.

Rwy 36: Hill.

AIRPORT REMARKS: Unattended. Rwy 18-36 north 100' CLOSED Apr 1-Jul 15. Rwy 18-36 first 300' of north end very rough. Heavy snowmobile activity during winter months. Rwy 18-36 edges and thlds marked with white rocks. Rwy 18 dsplcd thld marked with white rock markers. Recommend land Rwy 18; tkf Rwy 36 when wind conditions permit. No winter maintenance.

COMMUNICATIONS: CTAF 122.9

COLD MEADOWS USFS (See COLD MEADOWS GUARD STATION)

COLD MEADOWS GUARD STATION

COLD MEADOWS USFS (U81) 00 NW UTC-7(-6DT) N45°17.61' W114°56.72'

GREAT FALLS

7030 NOTAM FILE BOI

Rwy 16-34: 4550X90 (TURF-DIRT)

Rwy 16: Trees.

Rwy 34: Trees.

AIRPORT REMARKS: Unattended. No winter maintenance. Rodent activity on and in vicinity of arpt. Big game animals and livestock on and invof rwy. When wind conditions permit land Rwy 34 depart Rwy 16. Be advised U.S. Forestry Service recommends left turn down Cotton Wood Creek after departing Rwy 16. Rwy 34 125' ridge at 350' and 200' left. Very high density altitude factor during summer months. Rwy 16-34 center 20' portion of rwy length is DIRT. Rwy may be soft in early spring. Rubber water bar strips on rwy. Rwy 16-34 unpainted rock boundary markers. Rwy 16-34 South 3500' very rough. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

CONNERS N42°21.61' W113°27.43'.

SALT LAKE CITY

RCO 122.05 (BOISE RADIO)

L-11C

COOLIN

CAVANAUGH BAY (66S) 3 N UTC-8(-7DT) N48°31.12' W116°49.33'

GREAT FALLS

2484 NOTAM FILE BOI

Rwy 15-33: 3100X120 (TURF)

Rwy 15: Tree. Rgt tfc.

Rwy 33: Tree.

AIRPORT REMARKS: Attended Jun-Aug, Thu-Mon, 1600-0100Z+. Watch for sprinklers on rwy. No line of sight between Rwy ends. Seaplane ops conducted in bay north and adjacent to arpt monitor CTAF. Rwy 15-33 edges and thlds marked with white rocks. No winter maintenance. Heavy snowmobiles activity during winter months.

COMMUNICATIONS: CTAF 122.9

COPPER BASIN (See MACKAY)

COTTONWOOD MUNI (S84) 1 SE UTC-8(-7DT) N46°02.33' W116°19.89'

GREAT FALLS

3474 B NOTAM FILE BOI

L-13B

Rwy 07-25: H3100X50 (ASPH) MIRL

Rwy 07: Fence.

Rwy 25: PVASI(PSIR)—GA 5.0° TCH 50'.

AIRPORT REMARKS: Attended irregularly. Rwy 07-25 marked with numbers only. ACTIVATE MIRL Rwy 07-25, PVASI Rwy 25 and windsock lgts—CTAF. ACTIVATE rotating beacon—CTAF.

COMMUNICATIONS: CTAF 122.9


CASCADE RCO 122.35 (BOISE RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PUW.

PULLMAN (L) VORW/DME 109.0 PUW Chan 27 N46°40.46'

W117°13.41' 116° 53.2 NM to fld. 2720/20E. HIWAS.

DME unmonitored.



COUNCIL MUNI (U82) 1 NW UTC-7(-6DT) N44°45.02' W116°26.70'

GREAT FALLS

2963 B S2 FUEL 100LL NOTAM FILE BOI

L-13B

RWY 17-35: H3600X60 (ASPH) S-12.5 MIRL

RWY 17: Brush.

AIRPORT REMARKS: Unattended. Arpt surrounded by mountains all quadrants. ACTIVATE MIRL Rwy 17-35—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

CASCADE RCO 122.35 (BOISE RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

DONNELLY (H) VORTACW 116.2 DNJ Chan 109 N44°46.03'

W116°12.38' 245° 10.3 NM to fld. 7333/19E.



COXS WELL (See ATOMIC CITY)

CRAIGMONT MUNI (S89) 0 N UTC-8(-7DT) N46°14.86' W116°28.76'

GREAT FALLS

3805 B NOTAM FILE BOI

RWY 07-25: H2800X50 (ASPH) MIRL

RWY 25: Thld dsplcd 300'. Ground.

AIRPORT REMARKS: Attended Apr-Oct dailgt hours, Nov-Mar irregularly. CLOSED during heavy snowfall. Recommend landing Rwy 25, departing Rwy 07, when wind conditions permit. Rwy 25 thld dsplcd 300' at ngt, marked with dsplcd thld lights and rwy markings.

COMMUNICATIONS: CTAF 122.9

DIXIE USFS (A05) 3 SW UTC-8(-7DT) N45°31.24' W115°31.06'

GREAT FALLS

5148 NOTAM FILE BOI

RWY 18-36: 4500X100 (TURF)

RWY 18: Trees. RWY 36: Hill.

AIRPORT REMARKS: Unattended. Airstrip is located in high timber mountain basin. Base heliport for initial attack fire suppression, one copter working Jun-Sep. Recommend landing Rwy 36; when wind conditions permit.

Recommend departure Rwy 18, make right turn down Crooked Creek after departure. No winter maintenance. No telephone avbl at arpt. Rwy 18-36 ends marked with logs painted white.

COMMUNICATIONS: CTAF 122.9

DONALD D. COSKI MEM (See DONNELLY)

DONNELLY N44°46.03' W116°12.38' NOTAM FILE MYL.

GREAT FALLS

(H) VORTACW 116.2 DNJ Chan 109 012° 8.6 NM to McCall Muni. 7333/19E.

H-1C, L-13B

DONNELLY

DONALD D. COSKI MEM (U84) 1 W UTC-7(-6DT) N44°43.74' W116°05.56'

GREAT FALLS

4860 NOTAM FILE BOI

RWY 18-36: 2500X125 (TURF)

RWY 18: Trees. RWY 36: Trees.

AIRPORT REMARKS: Unattended. No winter maintenance. Recommend land Rwy 36 and take off Rwy 18 when wind conditions permit. No telephone avbl at arpt. Rwy 18-36 may not be mowed full width.

COMMUNICATIONS: CTAF 122.9


CASCADE RCO 122.35 (BOISE RADIO).

DOWNEY (HYDE MEM) (U58) 1E UTC-7(-6DT) N42°25.45' W112°06.57'SALT LAKE CITY
L-11D

4906 B NOTAM FILE BOI

RWY 17-35: H3550X50 (ASPH) LIRL

RWY 17: Tank. RWY 35: Road.


AIRPORT REMARKS: Unattended. Farm machinery to 20' high may be located within 500' of apch to Rwy 17. For LIRL Rwy 17-35 and rotating beacon—key 122.8, five times.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE MLD.MALAD CITY (H) VORW/DME 117.4 MLD Chan 121 N42°11.99'
W112°27.07' 031° 20.3 NM to fld. 7330/17E.**DRIGGS-REED MEM** (DIJ) 1N UTC-7(-6DT) N43°44.55' W111°05.87'SALT LAKE CITY
H-3E, L-11D
IAP6229 B S4 FUEL 100LL, JET A, OX 2 NOTAM FILE DIJ
RWY 03-21: H7302X75 (ASPH) S-30, D-60 MIRL 1.2% up NE

RWY 03: PAPI(P4L)—GA 3.0 TCH 45'.

RWY 21: REIL, PAPI(P4L)—GA 3.0 TCH 40'. Road. Rgt tfc.

AIRPORT REMARKS: Attended Oct-May 1500-0000Z†, Jun-Sep 1400-0200Z†. After hrs call 208-354-3100. Sailplane ops, heavy during summer months. Gliders use right traffic for Rwy 03 and left traffic for Rwy 21. Median between Rwy 03-21 and parallel twy not authorized for ldgs and takeoffs. ACTIVATE MIRL Rwy 03-21 and REIL Rwy 21—CTAF. PAPI Rwy 03 and 21 operate continuously.**WEATHER DATA SOURCES:** ASOS 120.775 (208) 354-6661.**COMMUNICATIONS:** CTAF/UNICOM 122.7

SALT LAKE CENTER APP/DEP CON 132.4

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.DUBOIS (H) VORTACW 116.9 DBS Chan 116 N44°05.33'
W112°12.56' 098° 52.5 NM to fld. 4915/15E.**DUBOIS** N44°05.33' W112°12.56' NOTAM FILE BOI.SALT LAKE CITY
H-3E, L-11D

(H) VORTACW 116.9 DBS Chan 116 206° 19.1 NM to Mud Lake (West Jefferson Co). 4915/15E.

DUBOIS MUNI (U41) 1SE UTC-7(-6DT) N44°09.74' W112°13.24'

SALT LAKE CITY

5123 NOTAM FILE BOI

RWY 16-34: 4600X100 (TURF)

RWY 16: Road. RWY 34: Rgt tfc.

AIRPORT REMARKS: Unattended. No winter maintenance. Rwy 16-34 is centered between boundary markers. Rwy 16-34 cone boundary markers 125' each side of rwy centerline and wood panels across both thlds. Rwy 16 +6' fence at 100' and 250' from thld on centerline. +75' steeple 1400' from thld, 100' left.**COMMUNICATIONS:** CTAF 122.9**ECKHART INTL** (See PORTHILL)

ELK CITY (S90) 0 SW UTC-8(-7DT) N45°49.36' W115°26.39'

GREAT FALLS

4097 S2 NOTAM FILE BOI

RWY 14-35: 2600X150 (TURF-GRVL)

RWY 14: Trees. **RWY 35:** Trees.

AIRPORT REMARKS: Unattended. Land Rwy 14, tkf Rwy 35 when wind condition allow. Rwy 14-35 is a curved rwy. Rwy 14-35 50' usable width. Rwy 14-35 may not be mowed to full width. Rwy 14 thld is not defined. Rwy not maintained in winter.

COMMUNICATIONS: CTAF 122.9

EMMETT MUNI (S78) 3 SW UTC-7(-6DT) N43°51.16' W116°32.35'

SALT LAKE CITY

L-11B

2350 B **FUEL** 100LL NOTAM FILE BOI

RWY 10-28: H3250X50 (ASPH) S-8 MIRL

RWY 10: Thld dsplcd 385'. **RWY 28:** Thld dsplcd 260'. Fence.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs self serve credit card.

Golf course on both sides of rwy. Golf course road crosses near Rwy 28 thld. Watch for golfers on rwy. 1800X20 private GRVL agriculture rwy located adjacent NW of arpt. Rwy 28 dsplcd thld marked with white bar and white chevrons only.


COMMUNICATIONS: CTAF 122.9

SQUAW BUTTE RCO 122.45 (BOISE RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

BOISE (H) VORTACW 113.3 BOI Chan 80 N43°33.17'

W116°11.53' 303° 23.5 NM to fld. 2876/17E.

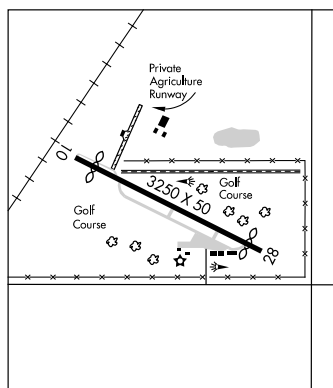

FAIRFIELD

CAMAS CO (U86) 0 S UTC-7(-6DT) N43°20.51' W114°47.90'

SALT LAKE CITY

5058 NOTAM FILE BOI

RWY 07-25: 2950X40 (DIRT)

RWY 07: Road. **RWY 25:** Pole.

AIRPORT REMARKS: Unattended. Irregular winter maintenance and snow removal, check rwy condition before using.

COMMUNICATIONS: CTAF 122.9

FISH LAKE (USFS) (S92) 0 E UTC-8(-7DT) N46°19.81' W115°03.79'

GREAT FALLS

5646 NOTAM FILE BOI

RWY 04-22: 2650X50 (TURF)

RWY 04: Hill. **RWY 22:** Brush.

AIRPORT REMARKS: Unattended. No winter maintenance. Do not park acct in front of USFS administrative site. Rwy 04-22 soft when wet. Land Rwy 22 take off Rwy 04 no touch and go landings or stop and go landings, go arounds not recommended due to steep rising terrain off west end of Rwy 04-22. Rwy 04-22 additional 400' of length available for takeoff on the end of Rwy 04. Down drafts prevalent over lake. Ctc USFS arpt manager 208-983-4060 for briefings and rwy conditions. Recommend early morning and late evening operations during summer months. Normally mowed to a usable width of 50'-75' . Rwy 22 end marked with concrete 'T' marker. Rwy 04 and Rwy 22 ends marked with orange cones. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

FRIEDMAN MEM (See HAILEY)

GALENA**SMILEY CREEK** (U87) 6 NW UTC-7(-6DT) N43°54.73' W114°47.76'

SALT LAKE CITY

7160 NOTAM FILE BOI

RWY 14-32: 4900X150 (TURF)**RWY 14:** Fence. **RWY 32:** Fence.**AIRPORT REMARKS:** Unattended. No winter maintenance. Extremely high density altitude conditions exist during summer months. Recommend land Rwy 14, tkf Rwy 32, when wind conditions allow. Be alert for sprinklers/stand pipes on edge of rwy. Rwy 14-32 edges and thlds marked with white rock.**COMMUNICATIONS:** CTAF 122.9**GARDEN VALLEY** (U88) 2 SE UTC-7(-6DT) N44°04.02' W115°55.88'

SALT LAKE CITY

3177 NOTAM FILE BOI

RWY 10-28: 3850X125 (TURF)**RWY 10:** Fence. **RWY 28:** Fence.**AIRPORT REMARKS:** Unattended. USFS heliport opns adjacent to SE end of arpt. Watch for sprinkler heads on rwy. Arpt located in mountain valley. No winter maintenance. Recommend landing Rwy 10, takeoff Rwy 28, if winds allow. Rwy 10-28 edges and thresholds marked with white rocks. No telephone avbl at arpt.**COMMUNICATIONS:** CTAF 122.9**GLENGARY****LAKE PEND OREILLE SPB** (S96) 1 SE UTC-8(-7DT) N48°13.00' W116°21.64'

GREAT FALLS

2062 B NOTAM FILE BOI

WATERWAY 14-32: 15000X4000 (WATER)**SEAPLANE REMARKS:** Attended continuously. Unmarked helipad located on beach to the west adjacent to docks with non-standard helicopter VASI located on winch platform. Helicopter operation on and in vicinity of Seaplane Base.**COMMUNICATIONS:** CTAF/UNICOM 122.8**GLENN'S FERRY MUNI** (U89) 1 SW UTC-7(-6DT) N42°56.62' W115°19.81'


SALT LAKE CITY

2536 B NOTAM FILE BOI

RWY 08-26: H3050X60 (ASPH) MIRL**RWY 26:** Trees.**AIRPORT REMARKS:** Unattended. Rwy 08-26 distance to go markers every 1000' south side of rwy. Rwy 08-26 white reflectors on both edges of rwy; green reflectors on both thlds. Roating bcn OTS indef. ACTIVATE MIRL Rwy 08-26—CTAF.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE TWF.**TWIN FALLS (L) VORTACW** 115.8 TWF Chan 105 N42°28.79'

W114°29.37' 289° 46.4 NM to fld. 4140/18E.

L-11C

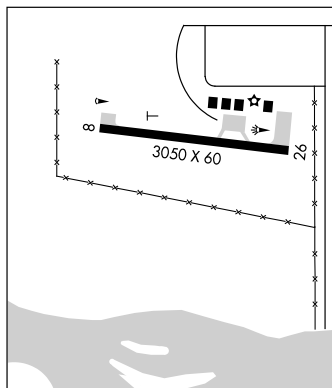

GOODING MUNI (GNG) 3 SW UTC-7(-6DT) N42°55.03' W114°45.91'

SALT LAKE CITY

3732 B S4 **FUEL** 100LL, JET A NOTAM FILE BOI

L-11C

RWY 07-25: H4745X75 (ASPH) S-12.5 MIRL 1.4% up NE

IAP

RWY 07: Road.

AIRPORT REMARKS: Attended 1500-0000Z+. For arpt attendant after hours call 208-539-5934 or 208-934-8298. Considerable helicopter ops. ACTIVATE MIRL Rwy 07-25—CTAF. 3 clicks medium ints-5 clicks high ints.

COMMUNICATIONS: CTAF/UNICOM 122.8

BLISS RCO 122.4 (BOISE RADIO)

SALT LAKE CENTER APP/DEP CON 118.05


RADIO AIDS TO NAVIGATION: NOTAM FILE TWF.

TWIN FALLS (L) VORTACW 115.8 TWF Chan 105 N42°28.79'

W114°29.37' 317° 28.9 NM to fld. 4140/18E.

STEELHEAD NDB (MHW) 211 HDG N42°54.97'

W114°40.45' 255° 4.0 NM to fld. NOTAM FILE BOI. NDB unusable byd 15 NM.



GRAHAM USFS (See ATLANTA)

GRANGEVILLE

IDAHO CO (S80) 1 N UTC-8(-7DT) N45°56.55' W116°07.41'

GREAT FALLS

3314 B S2 **FUEL** 100LL, JET A NOTAM FILE BOI

H-1C, L-13B

RWY 07-25: H5101X75 (ASPH) S-75, D-95, 2D-145 MIRL 0.5% up E

IAP

RWY 07: REIL. Thld displcd 100'. Road.

AIRPORT REMARKS: Unattended. 24 hr self svc credit card fueling facility. Considerable USFS Fire retardant opns during summer months. Parachute activity May thru Aug. ACTIVATE REIL Rwy 07—CTAF. MIRL Rwy 07-25 operates continuously.


COMMUNICATIONS: CTAF 122.9

® SEATTLE CENTER APP/DEP CON 123.95

RADIO AIDS TO NAVIGATION: NOTAM FILE MYL.

DONNELLY (H) VORTACW 116.2 DNJ Chan 109 N44°46.03'

W116°12.38' 344° 70.6 NM to fld. 7333/19E.



GRASMERE (U91) 0 S UTC-7(-6DT) N42°22.40' W115°52.77'

SALT LAKE CITY

5134 NOTAM FILE BOI

RWY 05-23: 2750X150 (DIRT)

RWY 05: Fence.

AIRPORT REMARKS: Unattended. Rwy 05-23 surface may be poor due to damage by livestock, ground vehicles and rodents. Rwy 05, 4' fence at 90' on centerline, 7' road at 150' on center, 65' marked powerline at 900' on centerline. Rwy 05-23 edges and thlds marked with white rocks. No winter maintenance. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

GROUSE

ANTELOPE VALLEY (U92) 1 W UTC-7(-6DT) N43°40.63' W113°36.16'

SALT LAKE CITY

6180 NOTAM FILE BOI

RWY 05-23: 3450X130 (TURF)

RWY 05: Road. **RWY 23:** P-line.

AIRPORT REMARKS: Unattended. CLOSED to wheeled acft winters. No winter maintenance. Recommend ldg Rwy 05; txf

Rwy 23 when wind conditions allow. Arpt located in mountain valley surrounded by high terrain. Rwy 05-23 edges and thld marked with white rock. +5' sagebrush adjacent to both rwy edges and Rwy 05 thld.

COMMUNICATIONS: CTAF 122.9

HAILEY N43°19.75' W114°14.55' NOTAM FILE SUN.

SALT LAKE CITY

NDB/DME (MHW) 220 HLE Chan 25 332° 10.8 NM to Friedman Mem. NDB unmonitored.

L-11C

DME unmonitored.

NDB portion unusable:

310°-350° byd 6 NM

DME unusable:

280°-080° byd 12NM

080°-280°.

RCO 122.4 (BOISE RADIO)

HAILEY

FRIEDMAN MEM (SUN) 1 SE UTC-7(-6DT) N43°30.23' W114°17.73'

SALT LAKE CITY

5318 B S4 **FUEL** 100LL, JET A1 + OX 1, 3 Class I, ARFF Index A NOTAM FILE SUN

H-3D, L-11C

RWY 13-31: H7550X100 (ASPH-GRVD) S-65, D-95, 2D-150 HIRL 0.8% up NW

IAP, AD

RWY 13: Thld dspcd 1701'. Road.

RWY 31: PAPI(P4L)—GA 3.5° TCH 55'. Tree.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 13: TORA-7150 TODA-7550 ASDA-7150 LDA-5450

RWY 31: TORA-5850 TODA-7550 ASDA-6631 LDA-6631

AIRPORT REMARKS: Attended dawn-dusk. Fuel avbl after dusk PPR 208-788-9511. Airfield sfc conditions not monitored between the hours of 0600Z and 1400Z. Bird activity SE end Rwy 31. When twr closed land Rwy 31—tkf Rwy 13 due to opposite direction traffic; use landing lights in traffic pattern. Due to opposite traffic: approach Rwy 31 along E side of valley: depart Rwy 13 along W side of valley: show landing light. Ctc arpt manager 208-788-4956 or 208-788-3702 for noise abatement procedures. APU ops ltd to 30 minutes maximum run time. Not recommended for night use or in marginal weather by unfamiliar pilots due to mountainous terrain. Twy A open between Twys A2 and A3 daylight hours only. Twys A-5 and B-5 restricted to acft with wingspans of 49' or less (Acft Design Group I) only. PPR for all unscheduled acft ops utilizing acft with a type certificate for more than 30 passenger seats. PPR for all scheduled air carrier ops between 0600-1300Z call arpt manager 208-788-4956. No locked brake turns. ACTIVATE HIRL Rwy 13-31—CTAF when twr clsd. PAPI Rwy 31 opr 24 hrs. Ldg fee for acft greater than 6,000 lbs.

WEATHER DATA SOURCES: AWOS-3 128.225 (208) 788-9213. LAWRS.

COMMUNICATIONS: CTAF 125.6 ATIS 128.225 (208) 788-2108 **UNICOM** 122.95

HAILEY RCO 122.4 (BOISE RADIO)

SALT LAKE CENTER APP/DEP CON 118.05.

HAILEY TOWER 125.6 (1400-0600Z) **GND CON** 121.7


AIRSPACE: CLASS D svc 1400-0600Z other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE BYI.

BURLEY (L) VOR/DME 114.1 BYI Chan 88 N42°34.82' W113°51.95' 323° 58.6 NM to fld. 4230/18E.

HAILEY NDB/DME (MHW) 220 HLE Chan 25 N43°19.75' W114°14.55' 332° 10.8 NM to fld. NOTAM FILE SUN. NDB unmonitored. DME unmonitored.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.



MAGIC RESERVOIR (U93) 15 SW UTC-7(-6DT) N43°16.84' W114°23.78' SALT LAKE CITY
 4844 NOTAM FILE BOI
RWY 03-21: 4000X100 (TURF-GRVL)
RWY 03: Road. **RWY 21:** Fence.
RWY 09-27: 1750X100 (TURF)
RWY 09: Sign. **RWY 27:** Trees.
AIRPORT REMARKS: Unattended. No winter maintenance. When wind conditions allow, land Rwy 03 or Rwy 09, tkf Rwy 21 or Rwy 27 to avoid flying over resort area. Rwy 09-27 no line of sight between rwy ends. Rwy 03-21 edges and thld marked with white rocks. No telephone avbl at arpt.
COMMUNICATIONS: CTAF 122.9

HAZELTON MUNI (U94) 1 S UTC-7(-6DT) N42°34.57' W114°08.16' SALT LAKE CITY
 4172 NOTAM FILE BOI
RWY 06-24: 2800X90 (GRVL)
RWY 06: Building. **RWY 24:** Road.
AIRPORT REMARKS: Unattended. No winter maintenance. Rwy 06-24 no line of sight between rwy ends. Rwy 06-24 has a 300' grvl stopway on northeast end.
COMMUNICATIONS: CTAF 122.9

HENRY'S LAKE (See LAKE)

HOLLOW TOP (See MARTIN)

HOMEDALE MUNI (S66) 1 SE UTC-7(-6DT) N43°36.88' W116°55.29' SALT LAKE CITY
 2210 S1 NOTAM FILE BOI
RWY 13-31: H2900X50 (ASPH) S-6 LIRL (NSTD)
RWY 13: Thld dsplcd 335'. Brush.
AIRPORT REMARKS: Unattended. No telephone avbl at arpt. Rwy 13-31 first 900' Rwy 31—LIRL; Rwy 31 has low ints thld lgts.
COMMUNICATIONS: CTAF 122.9

HOWE (U97) 4 NW UTC-7(-6DT) N43°50.34' W113°02.80' SALT LAKE CITY
 4930 NOTAM FILE BOI
RWY 13-31: 3800X25 (GRVL)
RWY 13: Road. **RWY 31:** Road.
AIRPORT REMARKS: Unattended. Arpt used heavily by spray planes during summer. +15' to +20' farm machinery may be parked on apch to Rwy 13; 230' from end of rwy. Rwy 13 +12' sprinkler may be in position at 200' on centerline. Rwy 31 thld defined with white blocks and reflectors.
COMMUNICATIONS: CTAF 122.9

IDAHO CITY USFS (U98) 1 SW UTC-7(-6DT) N43°49.24' W115°51.06' SALT LAKE CITY
 3920 NOTAM FILE BOI
RWY 03-21: 3400X50 (GRVL-TURF)
RWY 03: Trees. **RWY 21:** Trees.
AIRPORT REMARKS: Unattended. Recommend land Rwy 03, tkf Rwy 21 when wind conditions permit. West 700' of rwy is turf, remainder is grvl. Rwy 03-21 edges and thlds marked with white rock. No winter maintenance. No telephone avbl at arpt.
COMMUNICATIONS: CTAF 122.9

IDAHO CO (See GRANGEVILLE)

IDAHO FALLS RGNL (IDA) 2 NW UTC-7(-6DT) N43°30.82' W112°04.25'**SALT LAKE CITY**4744 B S4 **FUEL** 100LL, JET A1 OX 1, 2, 3, 4 TPA-See remarks Class I, ARFF Index B H-3D, L-11D

NOTAM FILE IDA

IAP, AD

Rwy 02-20: H9002X150 (ASPH-GRVD) S-140, D-175, 2S-175, 2D-270 HIRL**Rwy 02:** REIL VASI(V4L)—GA 3.0° TCH 50'.**Rwy 20:** MALSR. PAPI(P4L)—GA 3.0° TCH 49'.**Rwy 17-35:** H4051X75 (ASPH) S-43, D-58 MIRL**Rwy 17:** PAPI(P4L)—GA 3.0° TCH 40'.**Rwy 35:** PAPI(P4L)—GA 3.5° TCH 45'. Antenna.

AIRPORT REMARKS: Attended 1230-0430Z†. Sfc conditions unmonitored Nov-Mar 0600-1130Z† and Apr-Oct 2230-1200Z†. Flocks of birds and waterfowl on and in vicinity of airport all year. Extensive agricultural ops. Airt ops be alert for possible incursions, no line of sight between runways. 24 hr PPR for unscheduled air carrier ops with more than 30 passenger seats call airport manager 208-529-1221. TPA-6244 (1500) multi-engine/turbojet aircraft, 5744 (1000) single-engine aircraft, 5244 (500) rotorcraft. Rwy 20 touchdown runway visual range available. When tower is closed, Rwy A between Rwy A1 and the hold short line for Rwy 17 is closed in order to protect Rwy 20 precision approaches. When tower closed, ACTIVATE HIRL Rwy 02-20, REIL Rwy 02 and MALSR Rwy 20—CTAF.

WEATHER DATA SOURCES: ASOS 135.325 (208) 524-4553 or (208) 524-6048.

COMMUNICATIONS: CTAF 118.5 ATIS 135.325 (208) 524-6048. UNICOM 122.95

RCO 122.55 (BOISE RADIO)

® **SALT LAKE CENTER APP/DEP CON** 128.35

TOWER 118.5 (1400-0300Z†) **GND CON** 121.7 **CLNC DEL** 121.7 (1400-0300Z†)

128.35 (SALT LAKE CITY CENTER 0300-1400Z†)

AIRSPACE: CLASS D svc 1400-0300Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE IDA.

(H) **VORW/DME** 113.85 IDA Chan 85(Y) N43°31.14' W112°03.84' at fld. 4724/15E.


SWEDEN NDB (MHW) 350 SWU N43°25.93' W112°09.75' 024° 6.3 NM to fld.

NDB unusable 025°-080° beyond 20 NM all altitudes.

UCONN NDB (LOM) 324 ID N43°35.87' W111°58.84' 201° 6.4 NM to fld.

ILS/DME 111.1 I-IDA Chan 48 Rwy 20 Class IB. LOM UCONN NDB.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at tower.

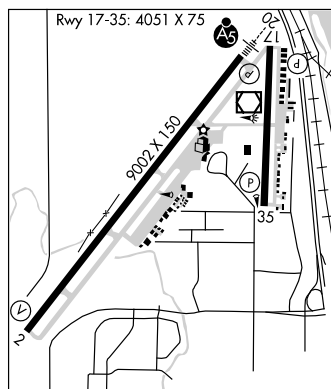**INDIAN CREEK USFS** (S81) 0 NE UTC-7(-6DT) N44°45.67' W115°06.44'**GREAT FALLS**

4701 NOTAM FILE BOI

Rwy 04-22: 4650X40 (DIRT)**Rwy 04:** Tree.**Rwy 22:** Tree.

AIRPORT REMARKS: Unattended. No winter maintenance. Traffic observance in vicinity of Pistol Creek Airport located 2.5 miles upstream. Be advised USFS recommends, when departing up or down stream remain in main canyon. Do not attempt to climb outside canyons. Rwy 04-22 edges and thresholds marked with white rocks, Rwy 04-22 40' useable width, rwy edge markers are 100' apart.

COMMUNICATIONS: CTAF 122.9

JEROME CO (JER) 3 E UTC-7(-6DT) N42°43.60' W114°27.40'

4053 B S4 FUEL 100LL, JET A NOTAM FILE JER

RWY 09-27: H5001X75 (ASPH) S-12.5 MIRL 1.8% up E

RWY 09: PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 27: Fence.

AIRPORT REMARKS: Attended continuously. Deer and wildlife on arpt.

CAUTION: Tower 690' AGL located 1.8 NM east-northeast of arpt.

Reflectors on parallel twy. ACTIVATE MIRL Rwy 09-27 and arpt bcn—CTAF.

WEATHER DATA SOURCES: ASOS 135.225 (208) 324-7076.

COMMUNICATIONS: CTAF/UNICOM 122.8

TWIN FALLS APP/DEP CON 126.7 (1300-0400Z‡)

SALT LAKE CENTER APP/DEP CON 118.05 (0400-1300Z‡)

RADIO AIDS TO NAVIGATION: NOTAM FILE TWF.


TWIN FALLS (L) VORTACW 115.8 TWF Chan 105 N42°28.79'

W114°29.37' 348° 14.9 NM to fld. 4140/18E.

SALT LAKE CITY

H-3D, L-11C

IAP



JOHNSON CREEK (See YELLOW PINE)

JOSLIN FLD—MAGIC VALLEY RGNL (See TWIN FALLS)

KAMIAH MUNI (S73) 1 SE UTC-8(-7DT) N46°13.19' W116°00.83'

1194 TPA—2194(1000) NOTAM FILE BOI

RWY 14-32: 3000X90 (TURF) LIRL (NSTD)

RWY 14: Brush. Rgt tfc.

RWY 32: Fence.

AIRPORT REMARKS: Attended irregularly. Numerous obstructions on both rwy apchs. Downdrafts prevalent over river on

Rwy 32 apch. Canadian geese on and in vicinity of arpt. Not recommended transient pilots land after dark

without first becoming familiar with arpt due to high terrain 0.5 mi from rwy. For rwy conditions during winter months call arpt manager 208-935-0089. ACTIVATE LIRL Rwy 14-32—CTAF.

COMMUNICATIONS: CTAF 122.9

GREAT FALLS

KELLOGG

SHOSHONE CO (S83) 3 W UTC-8(-7DT) N47°32.84' W116°11.34'

2227 B S3 FUEL 100LL TPA—3227(1000) NOTAM FILE BOI

RWY 07-25: H5316X75 (ASPH) S-14 MIRL

RWY 07: Tree. Rgt tfc.

RWY 25: Thld displcd 335'. Tree.

AIRPORT REMARKS: Attended daylight hours. ACTIVATE MIRL Rwy

07-25—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8


RADIO AIDS TO NAVIGATION: NOTAM FILE MLP.

MULLAN PASS (H) VORW/DME 117.8 MLP Chan 125 N47°27.42'

W115°38.76' 264° 22.7 NM to fld. 6100/20E. HIWAS.

GREAT FALLS

H-1D, L-13B

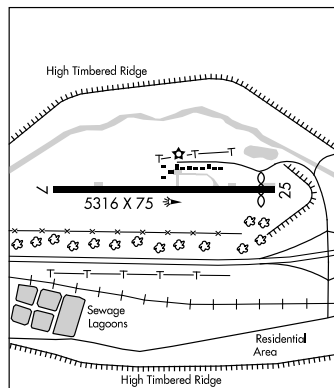

KETCHUM**TWIN BRIDGES** (U61) 22 NE UTC-7(-6DT) N43°56.62' W114°06.62'**SALT LAKE CITY**

6893 NOTAM FILE BOI

RWY 03-21: 4450X100 (TURF)**RWY 03:** Berm. **RWY 21:** Hill.**AIRPORT REMARKS:** Unattended. Rwy 03-21 SW 560' rutted and unusable. Rwy 03-21 -1' ditch and +1' and 2' dirt berm entire perimeter of rwy. No winter maintenance. Arpt located in high mountain valley surrounded by high mountains. Be alert arpt subject to ongoing damage by livestock, ground vehicles and rodents. Rwy 03-21 edges and thlds marked with white rocks.**COMMUNICATIONS:** CTAF 122.9**KIMAMA****LAILAW CORRALS** (U99) 12 N UTC-7(-6DT) N43°02.22' W113°44.02'**SALT LAKE CITY**

4427 NOTAM FILE BOI

RWY 07-25: 2250X130 (TURF)**RWY 07:** Hill. **RWY 25:** Road.**AIRPORT REMARKS:** Unattended. Rwy 07-25 surface subject to ongoing damage by rodents, ground vehicles and livestock. Rwy 07-25 edges and thlds marked with white rocks. No winter maintenance. Rwy 25 +15' road 30'-50' left.**COMMUNICATIONS:** CTAF 122.9**KOOSKIA MUNI** (S82) 1 S UTC-8(-7DT) N46°07.96' W115°58.73'**GREAT FALLS**

1263 NOTAM FILE BOI

RWY 14-32: 1900X100 (TURF)**RWY 14:** Road. **RWY 32:** Road.**AIRPORT REMARKS:** Unattended. Rwy 14-32 road crosses rwy near center. Geese on and invof arpt. Numerous obstructions in all quadrant around arpt. Rwy 14-32 width varies due to mowing and maintenance. Rwy 32 thld marked with red reflectors.**COMMUNICATIONS:** CTAF 122.9**KRASSEL USFS** (See MC CALL)**LAILAW CORRALS** (See KIMAMA)**LAKE (ISLAND PARK)****HENRY'S LAKE** (U53) 3 SE UTC-7(-6DT) N44°38.09' W111°20.56'**GREAT FALLS**

6596 NOTAM FILE BOI

RWY 06-24: 4600X170 (TURF)**RWY 06:** Fence. **RWY 24:** Fence. Rgt tfc.**AIRPORT REMARKS:** Unattended. Livestock and big game animals have access to rwy during fall, winter and spring. Do not leave acft unattended during these seasons. No winter maintenance. Rwy 06-24 edges and thlds marked with white rocks. Recommend land Rwy 06, tkf Rwy 24 when wind conditions allow.**COMMUNICATIONS:** CTAF 122.9**LAKE PEND OREILLE SPB** (See GLENGARY)**LANDMARK USFS** (ØUØ) 1 SE UTC-7(-6DT) N44°38.53' W115°32.00'**GREAT FALLS**

6662 NOTAM FILE BOI

RWY 16-34: 4000X100 (TURF-DIRT)**RWY 16:** Trees. **RWY 34:** Tree.**AIRPORT REMARKS:** Unattended. Wildlife on and in vicinity of arpt. No winter maintenance. No line of sight between rwy ends. Arpt located in high mountain valley surrounded by high terrain. Rwy 16-34 edges marked with white rock markers. No telephone avbl at arpt.**COMMUNICATIONS:** CTAF 122.9

LEADORE (U000) 0 S UTC-7(-6DT) N44°40.39' W113°21.15'

GREAT FALLS

6018 NOTAM FILE BOI

RWY 11-29: 3500X140 (ASPH-TURF) RWY LGTS (NSTD)

RWY 11: Poles. **RWY 29:** Fence.

RWY 16-34: 2900X90 (TURF)

RWY 16: Building. **RWY 34:** Fence.

AIRPORT REMARKS: Unattended. Numerous buildings in apch to Rwy 11. Rwy 11-29 2300' asph section starting at Rwy 11 end. Rwy 16-3' road at 200' on centerline, +30' pole 250' 60' left, numerous other obstruction to +10' at 100' to 400' in the apch zone. Agricultural irrigation equipment +15' may be located within 50' of AER 34. Rwy 11-29 surface rough. Rwy 16-34 surface rough. Rwy 11 last 1200' not lgtd.

COMMUNICATIONS: CTAF 122.9

LEE WILLIAMS MEM (See MIDVALE)

LEMHI CO (See SALMON)

LEWISTON

LEWISTON-NEZ PERCE CO (LWS) 2 S UTC-8(-7DT) N46°22.47' W117°00.92'

SEATTLE

1442 B S4 **FUEL** 100, 100LL, JET A TPA—See Remarks Class I, ARFF Index A

H-1C, L-13B

NOTAM FILE LWS

IAP, AD

RWY 08-26: H6511X150 (ASPH-PFC) S-150, D-180, 2S-175, 2D-400 HIRL

RWY 08: REIL. VASI(V4L)—GA 3.0° TCH 45'. Rgt tfc.

RWY 26: MALSR. PAPI(P4L)—GA 3.0° TCH 50'. Tree.

RWY 12-30: H5002X100 (ASPH-GRVD) S-70, D-94, 2S-119,

2D-150 MIRL 1.4% up SE

RWY 12: REIL. VASI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 30: VASI(V4R)—GA 3.0° TCH 47'. Antenna.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08: TORA-6511 TODA-6511 ASDA-6511 LDA-6511

RWY 12: TORA-5002 TODA-5002 ASDA-5002 LDA-5002

RWY 26: TORA-6511 TODA-6511 ASDA-6511 LDA-6511

RWY 30: TORA-5002 TODA-5002 ASDA-5002 LDA-5002

AIRPORT REMARKS: Attended 1330-0500Z†. CLOSED to unscheduled air carrier ops with more than 30 passenger seats 1500-0100Z† except PPR call arpt manager 208-746-7962 other times call station number 4 208-743-0172. Frequent no radio agricultural acft activity invof arpt. TPA—Heavy and turbine powered acft 3002(1560) all others 2502(1060). When twr clsd ACTIVATE MALSR Rwy 26, REIL Rwy 08 and Rwy 12—CTAF.

WEATHER DATA SOURCES: ASOS 135.575 (208) 746-4185. LAWRS.

COMMUNICATIONS: CTAF 119.4 UNICOM 122.95

RCO 122.35 (BOISE RADIO)

SEATTLE CENTER APP/DEP CON 123.95

TOWER 119.4 (1400-0600Z†) GND CON 121.9

AIRSPACE: CLASS D svc 1400-0600Z† other times CLASS E.


RADIO AIDS TO NAVIGATION: NOTAM FILE LWS.

NEZ PERCE (L) VORW/DME 108.2 MQG Chan 19 N46°22.89' W116°52.17' 246° 6.1 NM to fld. 1720/20E.

DME unmonitored.

ILS 109.7 I-LWS Rwy 26. Class IE. ILS unmonitored when tower closed. Autopilot coupled

approaches not applicable blo 2500 ft.



SNAKE RIVER SPB (78U) 1 SW UTC-8(-7DT) N46°23.99' W117°03.06'

SEATTLE

735 NOTAM FILE BOI

WATERWAY N-S: 3000X150 (WATER)

WATERWAY S: P-line.

SEAPLANE REMARKS: Attended Apr-Oct 1500Z†-dusk and Nov-Mar irregularly. P-lines cross Snake River north, south above and below landing area. Bridge across Snake River N of landing area. CAUTION: Landing area within Lewiston-Nez Perce County CLASS D airspace, ctc Lewiston twr. Waterway N-S waterlane length and width varies. Heavy boat traffic in vicinity of Seaplane Base.

COMMUNICATIONS: CTAF 122.9

LIBERATOR N42°58.96' W115°46.46' NOTAM FILE BOI.

SALT LAKE CITY

(L) VORW 114.9 LIA 354° 9.1 NM to Mountain Home Muni.

L-11B

LOWMAN**WARM SPRINGS CREEK** (ØU1) 13 NE UTC-7(-6DT) N44°08.53' W115°18.84'

SALT LAKE CITY

4831 NOTAM FILE BOI

RWY 02-20: 2850X135 (TURF)**RWY 02:** Tree. **RWY 20:** Trees.**AIRPORT REMARKS:** Unattended. Recommend land Rwy 02, takeoff Rwy 20, when wind conditions allow. No line of sight between rwy ends. No winter maintenance. Rwy 02-20 edges and thlds marked with white rocks. No telephone avbl at arpt.**COMMUNICATIONS:** CTAF 122.9**MACKAY****COPPER BASIN** (ØU2) 12 SW UTC-7(-6DT) N43°48.12' W113°49.89'

SALT LAKE CITY

7920 NOTAM FILE BOI


RWY 12-30: 4700X100 (TURF)**RWY 12:** Road.**AIRPORT REMARKS:** Unattended. CLOSED to wheeled acft winters. Livestock on and in vicinity of arpt. No winter maintenance. Twy to midfield tiedowns 15' wide, -1' ditch adjacent to edges of twy. Rwy 12-30 edges and thresholds marked with white rocks. Arpt located in high mountain valley surrounded by high mountains.**COMMUNICATIONS:** CTAF 122.9**MACKAY** (U62) 1 SE UTC-7(-6DT) N43°54.60' W113°36.14'

SALT LAKE CITY

5892 NOTAM FILE BOI

RWY 12-30: H4389X60 (ASPH)**RWY 12:** Pline. **RWY 30:** Brush.**AIRPORT REMARKS:** Unattended. Recommend land Rwy 30, depart Rwy 12 when winds permit. Rwy 12-30 very rough chip seal.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE BOI.**DUBOIS (H) VORTACW** 116.9 DBS Chan 116 N44°05.33'

W112°12.56' 245° 61.3 NM to fld 4915/15E.

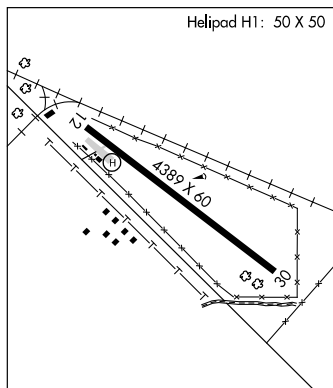HELIPAD H1: H50X50 (ASPH)**HELIPORT REMARKS:** Square helipad located between rwy and parking area.**MAGEE** (See COEUR D'ALENE)**MAGIC RESERVOIR** (See HAILEY)**MAHONEY CREEK USFS** (ØU3) 2 SE UTC-7(-6DT) N44°44.68' W114°55.28'

GREAT FALLS


4618 NOTAM FILE BOI

RWY 03-21: 2150X15 (DIRT)**RWY 03:** Hill. **RWY 21:** Hill.**AIRPORT REMARKS:** Unattended. Recommend ldg Rwy 21, tkf Rwy 03 when wind conditions allow. No winter maintenance. -1' ditch located 20' from centerline both sides of rwy. Rwy 03 NE end first 500' extremely rough. Rwy 03-21 thlds and edges have wood boundary markers, edge markers set at 65' width. First 500' of Rwy 21 has -1.5' to -2' deep holes. Rwy 21 has 15' elk wallow located adjacent S rwy 21 thld. No telephone avbl at arpt.**COMMUNICATIONS:** CTAF 122.9

MALAD CITY N42°11.99' W112°27.07' NOTAM FILE MLD.
 (H) VOR/DME 117.4 MLD Chan 121 087° 7.4 NM to Malad City. 7330/17E.
 VOR portion unusable:
 157°–167° byd 25 NM blo 11,000'.
 DME portion unusable:
 005°–025° byd 30 NM blo 14,000' 157°–167° byd 25 NM blo 11,000'.
 RCO 122.65 (BOISE RADIO)

SALT LAKE CITY
 H–3D, L–11C

MALAD CITY (MLD) 3 SW UTC–7(–6DT) N42°10.23' W112°17.36'
 4503 B FUEL 100LL NOTAM FILE MLD
 RWY 16–34: H4950X60 (ASPH) MIRL
 RWY 16: Thld dsplcd 150'. Sprinkler.
 RWY 34: Thld dsplcd 210'. P–line.
AIRPORT REMARKS: Attended Mon–Sat 1500–0000Z†. For fuel call
 208–220–2519/208–598–4430. Rwy 16–34 no dsplcd thld
 arrows, marked by dsplcd thld lgts and thld painted bar. ACTIVATE
 MIRL Rwy 16–34—CTAF.
COMMUNICATIONS: CTAF 122.9
 RCO 122.65 (BOISE RADIO).
RADIO AIDS TO NAVIGATION: NOTAM FILE MLD.
 (H) VOR/DME 117.4 MLD Chan 121 N42°11.99'
 W112°27.07' 087° 7.4 NM to fld. 7330/17E.



SALT LAKE CITY
 L–11C

MARTIN

HOLLOW TOP (ØU7) 11 S UTC–7(–6DT) N43°19.43' W113°35.43'
 5359 NOTAM FILE BOI
 RWY 05–23: 2500X140 (TURF)
 RWY 23: Road.
AIRPORT REMARKS: Unattended. CLOSED to wheeled acft winters. Animals on and in vicinity of arpt. No line of sight
 between rwy ends. Rwy 05–23 surface may be poor due to damage by livestock, ground vehicles and rodents.
 Rwy 05–23 edges and thlds marked with white rocks.
COMMUNICATIONS: CTAF 122.9

SALT LAKE CITY

MAY (ØU8) 1 NE UTC–7(–6DT) N44°36.62' W113°53.69'

GREAT FALLS

5324 NOTAM FILE BOI

RWY 09–27: 4950X200 (TURF)

RWY 09: Pole. RWY 27: Fence.

AIRPORT REMARKS: Unattended. Recommend ldg Rwy 09, tkf Rwy 27, when wind conditions permit. No winters
 maintenance. Rwy 09 +40' pole 600' apch end rwy 50' R. Fence markers located on apch end of Rwy 27. Arpt
 located in high mountain valley surrounded by high terrain. Rwy 09–27 edges and thlds marked with white rocks.

COMMUNICATIONS: CTAF 122.9

MC CALL

KRASSEL USFS (24K) 17 NE UTC–7(–6DT) N44°58.45' W115°43.79'

GREAT FALLS

3982 NOTAM FILE BOI

RWY 17–35: 1500X150 (TURF)

RWY 17: Tree. RWY 35: Trees.

AIRPORT REMARKS: Unattended. Extensive helicopter ops during Summer months. Rwy 17–35 land Rwy 17, tkf Rwy 35
 when wind conditions permit. Considerable rodent activity on rwy. +80' to +120' trees adjacent to both sides of
 rwy. Rwy 17–35 may not be mowed to full width. Rwy 17–35 rwy surface rough due to rodent holes.

COMMUNICATIONS: CTAF 122.9

MC CALL MUNI (MYL) 0 S UTC-7(-6DT) N44°53.32' W116°06.11'

5024 B S4 FUEL 100LL, JET A, A1+ NOTAM FILE MYL

RWY 16-34: H6108X75 (ASPH) S-45, D-78, 2D-135 MIRL 0.3% up N

RWY 16: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road.

RWY 34: REIL. VASI(V2L)—GA 3.0° TCH 40'. Ground.

AIRPORT REMARKS: Attended daylight hours. 2 hr prior notice rqr for snow removal at night call (208) 634-1488/630-4659. Big game animals may be on or in vicinity of rwy. Recommend landing Rwy 34, tkf Rwy 16, when wind conditions permit. Rwy 16 trees obscuring thld on short final. Rwy 16 has a marked 50' blast pad. USFS practices parachute jumps invof arpt. No helicopter parking in fixed wing tie down areas. Increased Forest Service flight opns during summer months. Parallel twy closed Dec 1-Apr 30. APU's may not be started until 30 min prior to engine start.

WEATHER DATA SOURCES: ASOS 119.925 (208) 634-7198.

COMMUNICATIONS: CTAF/UNICOM 122.8

CASCADE RCO 122.35 (BOISE RADIO)


SALT LAKE CENTER APP/DEP CON 128.05

RADIO AIDS TO NAVIGATION: NOTAM FILE MYL.

DONNELLY (H) VORTACW 116.2 DNJ Chan 109 N44°46.03'

W116°12.38' 012° 8.6 NM to fld. 7333/19E.

NDB (MHW) 363 IOM N44°48.34' W116°06.14' 343° 5.0 NM to fld. NOTAM FILE MYL. NDB unusable byd 15 NM.



HELIPAD H1: H100X80 (ASPH)

HELIPORT REMARKS: Helipad H1 lighted.

McCARLEY FLD (See BLACKFOOT)

MERIDIAN N43°36.20' W116°32.34' NOTAM FILE BOI.

NDB (MHW) 238 MPA 136° 1.5 NM to Nampa Muni.

SALT LAKE CITY

L-11B

MIDVALE

LEE WILLIAMS MEM (ØU9) 1 SW UTC-7(-6DT) N44°27.68' W116°45.48'

SALT LAKE CITY

2617 NOTAM FILE BOI

RWY 08-26: H2875X60 (ASPH)

RWY 08: Fence. RWY 26: Fence.

AIRPORT REMARKS: Unattended. No winter maintenance, arpt CLOSED when snow conditions indicate. Rwy 26 +30' pline at 600' on centerline +35' bldg at 400' on centerline, +150' pline at 5000' on centerline. Rwy 08-26 250' gravi ovrn each end. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

CASCADE RCO 122.35 (BOISE RADIO)

MIDWAY (See ATOMIC CITY)

MINIDOKA

BEAR TRAP (1UØ) 15 NE UTC-7(-6DT) N42°58.52' W113°21.05'

SALT LAKE CITY

4716 NOTAM FILE BOI

RWY 06-24: 2250X120 (TURF-DIRT)

RWY 06: Road.

AIRPORT REMARKS: Unattended. Rwy 06-24 subject to ongoing damage by livestock, ground vehicles and rodents. No winter maintenance. No line of sight between rwy ends. Rwy 06-24 edges and thlds marked with white rock.

COMMUNICATIONS: CTAF 122.9

MOOSE CREEK RANGER STATION**MOOSE CREEK (USFS)** (1U1) 0 SW UTC-7(-6DT) N46°07.25' W114°55.64'**GREAT FALLS**

2454 NOTAM FILE BOI

RWY 01-19: 4100X250 (TURF)**RWY 01:** Trees. **RWY 19:** Trees.**RWY 04-22:** 2300X200 (TURF)**RWY 04:** Trees. **RWY 22:** Trees.

AIRPORT REMARKS: Unattended. Rwy 01-19 CLOSED Nov 1 thru Memorial Day weekend, except for skis on snow. Ctc USFS arpt manager 208-926-4258, for briefings and rwy conditions. Rwy 01-19 recommend ldg Rwy 19 tfr Rwy 01 when wind conditions permit. Land Rwy 04, tfr Rwy 22, go around not recommended. Rwy 01-19 muddy spring and winter. Use Rwy 04-22 early spring and late fall/winter when possible due to better drainage and firmer surface. Rws subject to temporary closures. Big game animals on and in vicinity of arpt. Skis winter months. No winter maintenance.

COMMUNICATIONS: CTAF 122.9**MOUNTAIN HOME AFB** (MUO)(KMUO) AF 10 SW UTC-7(-6DT) N43°02.62' W115°52.35'**SALT LAKE CITY**

2996 B TPA—See Remarks NOTAM FILE MUO Not insp.

H-3C, L-11B**RWY 12-30:** H13501X200 (PEM) PCN 91 F/A/W/T HIRL**DIAP, AD****RWY 12:** ALSF1. PAPI. **RWY 30:** ALSF1. PAPI.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 12:** TODA-13501 ASDA-13501**RWY 30:** TODA-13501 ASDA-13501**ARRESTING GEAR/SYSTEM****RWY 12** HOOK BAK-12B(B) (964')HOOK BAK-12B(B) (964') **RWY 30**

MILITARY SERVICE: LGT Rwy 12-30 PAPI unusable byd 5° from rwy centerline. Rwy 12-30 ILS and PAPI runway reference point not coincidental. Thld lgt gated for fighter acft. **A-GEAR** Rwy 12-30 BAK-12B in raised position, requires 30 minutes prior notice for removal. **JASU 2**(AM32A-60) **FUEL J8** **FLUID** LHGX LOX De-ice **OIL O-148-156** JOAP **TRAN ALERT** Opr Mon-Thu 1400-0700Z†, Fri 1400-0100Z†, clsd weekends and holidays. **MILITARY REMARKS:** Opr Mon-Thu 1400-0700Z†, Fri 1400-0100Z†, clsd weekends and holidays. See FLIP AP/1 Supplementary Arpt Remark. **RSTD** Dep acft restricted to 4700' until passing 3 DME. PPR only except VIP Code 6 or above, AIREVAC and SAAM. Minimum 24 hrs notice required and no more than 7 days prior. Acft requiring customs must coordinate for PPR no later than 72 hrs prior. All acft must adhere to PPR estimated time of arrival +/- 30 minutes or PPR is invalid. Ctc Base OPS DSN 728-2222, C208-828-2222, fax extension 4128. Delta live ordnance loading area (LOLA) spot 1 and CHARLIE LOLA spots 1 and 5 clsd to all acft. **CAUTION** Taxi-lines in end of rwy are made for acft with wingspans of 43' or less only. Waterfowl hazard. **TFC PAT** TPA—Overhead 5200(2204). Rectangular 4300(1304), lgt acft/helicopter 3800(804). **NS ABTMT** Command quiet hr policy in effect 0530-1300Z†. **CS/TMS/AG/IMG** Consult base ops prior planning mission. Acft req support must ctc 366 SFS police DSN 728-2256, com 208-828-2256 and/or afld manager DSN 728-2222, com 208-828-2222 at least 24 hr prior arrival. Failure to comply may result in delays. 366 SFS police provide customs for US military personnel. Customs required for all cargo and non-US military personnel must be completed by US customs office, Boise. Ensure aircrew remain at acft until customs arrive. **MISC** Afld subject to short notice closures. First 1280' Rwy 12-30 conc, mid 10940' asphaltic conc. Acft carry drag chutes to park or advise twr. Standard USAF RSRs applied. ACC acft expect reduced rwy separation: ACC acft not wishing to participate in RSRs will make intentions known on initial ctc with twr. Afld wx is monitored by AN/FMQ-19 automated observing system and augmented by human observer during opr hr. DSN 728-6303, C208-828-6303, FAX extension 4438.

COMMUNICATIONS: ATIS 273.5 **PTD** 138.9 372.2**RCO** 122.6 (BOISE RADIO)**(R) APP CON** 124.8 259.1 (Mon-Thu 1400-0700Z†, Fri 1400-0100Z†, clsd weekends and holidays)**TOWER** 133.85 253.5 (Mon-Thu 1400-0700Z†, Fri 1400-0100Z†, clsd weekends and holidays. **GND CON** 120.5275.8 **CLNC DEL** 127.1 290.425**(R) DEP CON** 371.2 (Mon-Thu 1400-0700Z†, Fri 1400-0100Z†, clsd weekends and holidays).

ACC COMD POST 311.0 321.0 15091 (Have QUICK timing avbl 381.3) (RAYMOND 27) **PMSV METRO** 342.5 Full svc available from WX during airfield operating hours. Remote briefing svc available from 25 OWS Davis Monthan AFB, DSN 228-6598, COM (520) 228-6598.

AIRSPACE: CLASS D svc Mon-Thu 1400-0700Z†, Fri 1400-0100Z†, clsd weekends and holidays, other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

(L) **TACAN MUO** (114.0) Chan 87 N43°02.43' W115°52.48' at fld. 3000/18E. Unmonitored when clsd. No NOTAM MP Wed 1100-1400Z†.

LIBERATOR (L) VORW 114.9 LIA N42°58.96' W115°46.46' 292° 5.7 NM to fld.**ILS** 110.3 I-MUO Rwy 12. Unmonitored when clsd. No-NOTAM MP Mon/Tue/Fri 1100-1400Z†.**ILS** 111.7 I-BRN Rwy 30. Unmonitored when clsd. No-NOTAM MP Mon/Tue/Fri 1100-1400Z†.**COMM/NAV/WEATHER REMARKS:** Radar maintenance Thu 1230-1400Z†.

MOUNTAIN HOME MUNI (U76) 2 W UTC-7(-6DT) N43°07.90' W115°43.83'

SALT LAKE CITY

3167 B S4 FUEL 100LL NOTAM FILE BOI

H-3D, L-11B

RWY 10-28: H5000X75 (ASPH) S-42, D-53 MIRL

IAP

RWY 10: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 28: REIL PAPI(P2L)—GA 3.0° TCH 33'. P-line.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z†. Arpt attended after hours emerg only. Fuel avbl 24 hrs with credit card. High performance military jet operations conducted at Mountain Home AFB 8 NM Southwest of arpt. Extensive agricultural ops. ACTIVATE MIRL Rwy 10-28, PAPI Rwy 10 and Rwy 28 and REIL Rwy 10 and Rwy 28—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.6 (BOISE RADIO)

Ⓡ APP/DEP CON 124.8 (Mon-Thu 1400-0700Z†, Fri 1400-0100Z†, clsd weekends and holidays)

SALT LAKE CENTER APP/DEP CON 118.05

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

BOISE (H) VORTACW 113.3 BOI Chan 80 N43°33.17'

W116°11.53' 124° 32.4 NM to fld. 2876/17E.


LIBERATOR (L) VORW 114.9 LIA N42°58.96' W115°46.46'

354° 9.1 NM to fld.

STURGEON NDB (MHW) 333 STI N43°06.80' W115°39.51'

272° 3.4 NM to fld. Unusable 320°-020° byd 15 NM.

COMM/NAV/WEATHER REMARKS: NOTE: See SPECIAL NOTICE—All aircraft operating within 20 NM of VOR are requested to contact Mountain Home APP CON on 124.8 for traffic advisory due to intensive military training in area.

**MUD LAKE (WEST JEFFERSON CO)** (1U2) 1 NW UTC-7(-6DT)

SALT LAKE CITY

N43°51.06' W112°30.08'

L-11C

4787 B NOTAM FILE BOI

RWY 02-20: H3300X40 (ASPH) LIRL (NSTD)

RWY 02: Thld dspld 400'. Fence.


RWY 20: TRCV(TRIL)—GA 3.5° TCH 40'. Road.

AIRPORT REMARKS: Attended May-Oct 1500-0000Z†, Nov-Apr irregular. LIRL Rwy 20 and rotating bcn inoperative each year 1 Nov-1 Apr. Rwy 20 has low ints thld lgts; first 600' rwy has low ints edge lgts, remaining 2700' of rwy illuminated with white edge reflectors. Rwy 20 thld marked with thld lgts only. Dspld thld marked with retroreflective reflectors and thld bar. Rwy 20 +40' pole at 700', 200' right. Confirm snow removal and winter condition with arpt manager, 208-663-4328 or 208-529-3875. Night operations recommended only to pilots familiar with airport approaches and surrounding terrain.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE BOI.

DUBOIS (H) VORTACW 116.9 DBS Chan 116 N44°05.33'

W112°12.56' 207° 19.1 NM to fld. 4915/15E.

**MULLAN PASS** N47°27.42' W115°38.76' NOTAM FILE MLP.

GREAT FALLS

(H) VORW/DME 117.8 MLP Chan 125 264° 22.7 NM to Shoshone Co. 6100/20E. HIWAS.

H-1D, L-13B

VOR portion unusable 055°-085° byd 20 NM blo 9,500'

RCO 122.15 (BOISE RADIO)

ASOS 135.475 MLP N47°27.42' W115°38.77'/6028. (208) 744-1721.

MURPHY (1U3) 0 E UTC-7(-6DT) N43°12.96' W116°32.90'

SALT LAKE CITY

2855 NOTAM FILE BOI

RWY 12-30: H2500X45 (ASPH)

RWY 12: Road. RWY 30: Road.

AIRPORT REMARKS: Unattended. Recommend land Rwy 12, tkf Rwy 30 when wind condition permits. Rwy 12-30 thlds marked with painted rocks. Ctc sheriff's office in courthouse across hwy from arpt for assistance.

COMMUNICATIONS: CTAF 122.9

MURPHY HOT SPRINGS (See THREE CREEK)**NAMPA MUNI** (MAN) 0 E UTC-7(-6DT) N43°34.88' W116°31.38'

2537 B S4 FUEL 100LL, JET A OX 2 TPA-3537(1000) NOTAM FILE BOI

RWY 11-29: H5000X75 (ASPH) S-26, D-50, 2D-60 MIRL

RWY 11: PAPI(P2L)—GA 3.0° TCH 40'. Building.

RWY 29: PAPI(P2L)—GA 3.62° TCH 45'. Trees.

AIRPORT REMARKS: Attended 1500-0000Z±.

WEATHER DATA SOURCES: AWOS-3 118.325 (208) 318-0040.

COMMUNICATIONS: CTAF/UNICOM 122.7

SQUAW BUTTE RCO 122.45 (BOISE RADIO)

® BOISE APP/DEP CON 119.6


RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

BOISE (H) VORTACW 113.3 BOI Chan 80 N43°33.17'

W116°11.53' 260° 14.5 NM to fld. 2876/17E.

MERIDIAN NDB (MHW) 238 MPA N43°36.20'

W116°32.34' 136° 1.5 NM to fld.



SALT LAKE CITY

H-1C, L-11B

IAP

NEW MEADOWS (1U4) 0 N UTC-7(-6DT) N44°58.68' W116°17.04'

3908 NOTAM FILE BOI

RWY 14-32: 2400X150 (TURF-GRVL)

RWY 14: Fence. RWY 32: Tree. Rgt tfc.

AIRPORT REMARKS: Unattended. No winter maintenance. No line of sight between rwy ends. Rwy 14-32 edges and thlds marked with white rocks. Rwy 14-32 South half 20' wide gravel strip with loose rocks up to 2", North half sparse gravel up to 2", grass may be high. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9

CASCADE RCO 122.35 (BOISE RADIO)

GREAT FALLS

NEZ PERCE N46°22.89' W116°52.17' NOTAM FILE LWS.

(L) VORW/DME 108.2 MQG Chan 19 246° 6.1 NM to Lewiston-Nez Perce Co. 1720/20E.

DME unmonitored.

VOR portion unusable:

075°-115° byd 20 NM blo 12,000'

115°-155° byd 25 NM blo 6,900'

280°-290° byd 20 NM blo 4,200'

290°-335° byd 25 NM blo 4,000'

SEATTLE

L-13B

NEZ PERCE MUNI (ØS5) 0 N UTC-8(-7DT) N46°14.31' W116°14.31'

3201 NOTAM FILE BOI

RWY 15-33: H2400X30 (ASPH)

RWY 15: Hill. RWY 33: Trees.

AIRPORT REMARKS: Attended Apr-Oct Mon-Fri 1600-0100Z±, Nov-Mar irregularly. 55' AGL unmarked/unlgt'd steel grain twr located 1350' south of Rwy 33, 116' left of extended centerline.

COMMUNICATIONS: CTAF 122.9

GREAT FALLS

NORDMAN**PRIEST LAKE USFS** (67S) 3 S UTC-8(-7DT) N48°34.50' W116°57.81'

2611 NOTAM FILE BOI

RWY 14-32: 4400X175 (TURF-GRVL)

RWY 14: Road. RWY 32: Road.

AIRPORT REMARKS: Unattended. USFS helipad private use. No winter maintenance. Rwy 14-32 may not be mowed to full width. Rwy 32 +14' road at 300' on centerline, 60' trees at 500' to 1000' on centerline. Rwy 14-32 thlds marked with concrete strips. Do not park acft within 100' of wx station.

COMMUNICATIONS: CTAF 122.9

GREAT FALLS

OAKLEY MUNI (1U6) 0 S UTC-7(-6DT) N42°14.03' W113°52.66'

SALT LAKE CITY

4650 NOTAM FILE BOI

RWY 16-34: 3800X40 (GRVL)

RWY 16: Fence.

RWY 34: Fence.

AIRPORT REMARKS: Unattended. CAUTION: Rwy surface soft during early spring. No winter maintenance.

COMMUNICATIONS: CTAF 122.9

ONTARIO N44°00.70' W116°24.36'

KLAMATH FALLS

RCO 122.3 (MC MINNVILLE RADIO)

L-11B

OROFINO MUNI (S68) 1 NW UTC-8(-7DT) N46°29.48' W116°16.61'

GREAT FALLS

1005 **FUEL** 100LL NOTAM FILE BOI

RWY 09-27: H2500X50 (ASPH) S-17 MIRL

RWY 09: Tree. Rgt tfc.

RWY 27: Road.

AIRPORT REMARKS: Attended irregularly. Two 1968' MSL (250' AGL) radio towers located approximately 1 mile E Rwy 27 300' left. High terrain in all quads around arpt. Exercise caution during night ops due to terrain. ACTIVATE MIRL Rwy 09-27—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

OROGRADE (75C) 1 NE UTC-8(-7DT) N45°43.81' W115°31.68'

GREAT FALLS

4405 NOTAM FILE BOI

RWY 01-19: 2800X50 (TURF-DIRT)

RWY 01: Trees.

RWY 19: Trees.

AIRPORT REMARKS: Unattended. Land Rwy 19; depart Rwy 01 when wind conditions permit. Big game animals on and in/ov arpt. Vehicles have access to rwy. Recommended use early morning and late evening in summer.

COMMUNICATIONS: CTAF 122.9

PARIS

BEAR LAKE CO (1U7) 3 E UTC-7(-6DT) N42°14.99' W111°20.50'

SALT LAKE CITY

5928 B **FUEL** 100LL NOTAM FILE BOI

H-3D, L-11D

RWY 10-28: H5730X75 (ASPH) S-12.5 MIRL (NSTD)

RWY 10: P-line.

RWY 16-34: H4590X70 (ASPH) S-50, D-64, 2D-102


RWY 16: Road.

AIRPORT REMARKS: Attended Mon-Sat continuously. Rwy 16-34 unmarked. Birds on and in/ov arpt. Rwy 10-28 NSTD MIRL mounted approximately 40 inches above ground, 10 feet from edge of pavement.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE MLD.

MALAD CITY (H) VORW/DME 117.4 MLD Chan 121 N42°11.99' W112°27.07' 069° 49.6 NM to fld. 7330/17E.



PARMA (50S) 1 S UTC-7(-6DT) N43°46.73' W116°56.31'

SALT LAKE CITY

2228 NOTAM FILE BOI

RWY 12-30: H2700X50 (ASPH)

RWY 12: Tree. Rgt tfc.

RWY 30: Fence.

AIRPORT REMARKS: Attended irregularly. Recommend land Rwy 30, tkf Rwy 12 when wind condition permit. Rwy 30 has +4' fence 185' from end of rwy on centerline.

COMMUNICATIONS: CTAF 122.9

PAYETTE MUNI (S75) 2 NE UTC-7(-6DT) N44°05.67' W116°54.22'

SALT LAKE CITY
L-11B

2228 B S8 NOTAM FILE BOI

RWY 13-31: H3000X50 (ASPH) S-8 LIRL

RWY 13: Thld dsplcd 250'. Trees.


AIRPORT REMARKS: Unattended. Golfers adjacent to rwy edges and Rwy 13 thld. Arpt CLOSED to acft over 10,000 lbs gross weight. Rwy 31 thlds marked with white concrete markers and white concrete boundary markers. 2885' MSL (405' AGL) marked and lgtd steel tower located 2.2 miles S of arpt. **ACTIVATE LIRL** Rwy 13-31—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

BOISE (H) VORTACW 113.3 BOI Chan 80 N43°33.17'

W116°11.53' 300° 44.8 NM to fld. 2876/17E.



PINE (1U9) 1 S UTC-7(-6DT) N43°27.74' W115°18.55'

SALT LAKE CITY

4232 NOTAM FILE BOI

RWY 16-34: 2300X125 (TURF-DIRT)

RWY 16: Road. **RWY 34:** Brush. Rgt tfc.

AIRPORT REMARKS: Unattended. No winter maintenance. Dog-leg north end of strip. Rwy 16-34 edges and thlds marked with white rocks.

COMMUNICATIONS: CTAF 122.9

POCATELLO RGNL (PIH) 7 NW UTC-7(-6DT) N42°54.59' W112°35.76'

SALT LAKE CITY

4452 B S4 **FUEL** 100LL, JET A1, A1 + OX 3, 4 Class II, ARFF Index A

NOTAM FILE PIH H-3D, L-11C

RWY 03-21: H9060X150 (ASPH-PFC) S-100, D-160, 2S-175, 2D-265 HIRL

IAP, AD

RWY 03: ODALS. VASI(V4L)—GA 3.0° TCH 53'.

RWY 21: MALSR. PAPI(P4L)—GA 3.0° TCH 58'.

RWY 17-35: H7150X100 (ASPH) S-60 MIRL

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 45'.

RWY 35: PAPI(P4L)—GA 3.0° TCH 45'. Pole.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03: TORA-9060 TODA-9060 ASDA-9060 LDA-9060

RWY 21: TORA-9060 TODA-9060 ASDA-9060 LDA-9060

AIRPORT REMARKS: Attended 1300-0500Z±. Flocks of waterfowl invof arpt. Twy G has no edge lights or reflectors, restricted to day use only. Radio controlled acft 1 mile east of arpt blo 400' AGL. PPR for unscheduled air carrier ops with more than 30 passenger seats, call arpt manager 208-234-6154 or 208-237-4738. Rwy 17-35 not available to air carrier ops with more than 30 passenger seats. After twr closed **ACTIVATE MIRL** Rwy 17-35, HIRL Rwy 03-21, ODALS Rwy 03, MALSR Rwy 21—CTAF.

WEATHER DATA SOURCES: ASOS 135.625 (208) 235-1287.

COMMUNICATIONS: CTAF 119.1 ATIS 135.625 (208) 232-2269

UNICOM 122.95

RCO 122.35 (BOISE RADIO)

® SALT LAKE CENTER APP/DEP CON 128.35

TOWER 119.1 (1300-0500Z±) **GND CON** 121.9

AIRSPACE: CLASS D svc 1300-0500Z± other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE PIH.

(H) **VORTACW** 112.6 PIH Chan 73 N42°52.22' W112°39.13' 029° 3.4 NM to fld. 4433/17E.


VOR portion unusable 060°-130° beyond 25 NM below 13,500'.

DME portion unusable 060°-130° beyond 25 NM below 13,500'.

TYHEE NDB (LOM) 383 PI N42°57.83' W112°30.98' 210° 4.8 NM to fld. Unmonitored when twr clsd.

ILS/DME 110.3 I-PIH Chan 40 Rwy 21. Class IE. LOM TYHEE NDB. LOC unmonitored when twr clsd.

COMM/NAV/WEATHER REMARKS: Freq 121.5 not avbl at tower. FBO monitors 122.95 and 123.0.



PORHILL**ECKHART INTL** (1S1) 0 W UTC-8(-7DT) N48°59.75' W116°30.06'

GREAT FALLS

1756 LRA NOTAM FILE BOI

RWY 15-33: 3650X175 (TURF)

RWY 15: Trees. RWY 33: Road

AIRPORT REMARKS: Unattended. Rwy 15 do not use asph twy for tkf. Recommend land Rwy 33; tkf Rwy 15 when wind condition permits. No winter maintenance. Rwy 15-33 edges and thld marked with white rocks.**COMMUNICATIONS:** CTAF/UNICOM 122.8**POST FALLS** N47°44.57' W116°47.66' NOTAM FILE COE.

GREAT FALLS

NDB (MHW) 347 LEN 053° 6.0 NM to Coeur D'Alene-Pappy Boyington Fld.

L-13B

PRAIRIE**SMITH PRAIRIE** (2UØ) 2 SE UTC-7(-6DT) N43°29.90' W115°32.82'

SALT LAKE CITY

4958 NOTAM FILE BOI

RWY 05-23: 5400X150 (TURF)

RWY 05: Fence. RWY 23: Fence.

AIRPORT REMARKS: Unattended. No winter maintenance. Recommend land Rwy 05, tkf Rwy 23, when wind conditions permit. Rwy 05-23 edges and thlds marked with white rocks. No telephone avbl at arpt.**COMMUNICATIONS:** CTAF 122.9**PRESTON** (U1Ø) 2 NW UTC-7(-6DT) N42°06.42' W111°54.75'

SALT LAKE CITY

4728 B S2 FUEL 100LL NOTAM FILE BOI

RWY 03-21: H3457X50 (ASPH) S-12 LIRL(NSTD)


RWY 21: Thld dspcd 330'. Highway.

RWY 16-34: 2437X30 (GRVL)

RWY 16: Road.

AIRPORT REMARKS: Attended dalgt hours. Rwy 16-34 CLOSED winters. Located on plateau. Sharp dropoff near thld, Rwys 03, 16, and 34. Rwy 03-21 lgts located 50' from edge of pavement. Rwy 21 dspcd thld marked with dspcd thld lgts only. ACTIVATE LIRL Rwy 03-21—CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE MLD.

MALAD CITY (H) VORW/DME 117.4 MLD Chan 121 N42°11.99' W112°27.07' 086° 24.7 NM to fld. 7330/17E.

**PRIEST LAKE USFS** (See NORDMAN)**PRIEST RIVER MUNI** (1S6) 1 N UTC-8(-7DT) N48°11.44' W116°54.59'

GREAT FALLS

2187 NOTAM FILE BOI

RWY 01-19: H2950X48 (ASPH) S-12.5 LIRL(NSTD)

RWY 01: Tree. RWY 19: Trees.

AIRPORT REMARKS: Unattended. Night operations land Rwy 01 and dep Rwy 19. Rwy 01-19 has NSTD LIRL, Rwy 01 first 200' unlighted. Rwy 01-19 LIRL not in svc Dec 1-Apr 1. ACTIVATE LIRL—CTAF.**COMMUNICATIONS:** CTAF 122.9**PULLMAN/MOSCOW RGNL** (See PULLMAN/MOSCOW, WA)

REXBURG—MADISON CO (RXE) 1 NW UTC-7(-6DT) N43°50.03' W111°48.31'

SALT LAKE CITY

4858 B S4 FUEL 100LL, JET A OX 3 NOTAM FILE RXE

L-11D

RWY 17-35: H4200X75 (ASPH) S-30 MIRL

IAP

RWY 17: VASI(V4R)—GA 3.0°TCH 50'. Thld displcd 300'. Tree.

RWY 35: REIL. VASI(V4L)—GA 3.0°TCH 40'. Tree.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 17: TORA-4200 TODA-4200 ASDA-4200 LDA-3900

RWY 35: TORA-4200 TODA-4200 ASDA-3900 LDA-3900

AIRPORT REMARKS: Attended Mon-Sat 1500-0100Z±. ACTIVATE VASI

Rwy 17 and Rwy 35 and REIL Rwy 35-CTAF.

WEATHER DATA SOURCES: ASOS 135.075 (208) 356-0986.

COMMUNICATIONS: CTAF/UNICOM 122.8


Ⓡ SALT LAKE CENTER APP/DEP CON 128.35

RADIO AIDS TO NAVIGATION: NOTAM FILE IDA.

IDAHO FALLS (H) VORW/DME 113.85 IDA Chan 85(Y)

N43°31.14' W112°03.84' 016° 22.0 NM to fld.

4724/15E.



RIGBY—JEFFERSON CO (U56) 2 S UTC-7(-6DT) N43°38.55' W111°55.76'

SALT LAKE CITY

4845 B FUEL 100LL NOTAM FILE BOI

L-11D

RWY 01-19: H3500X50 (ASPH) LIRL

RWY 19: Thld displcd 200'. Road.

AIRPORT REMARKS: Unattended. Noise abatement procedures in effect.

Call arpt manager 208-754-4352. ACTIVATE LIRL Rwy


01-19-CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

DUBOIS (H) VORTACW 116.9 DBS Chan 116 N44°05.33'

W112°12.56' 140° 29.4 NM to fld. 4915/15E.



ROCKFORD MUNI (2U4) 0 E UTC-7(-6DT) N43°11.37' W112°31.91'

SALT LAKE CITY

4465 NOTAM FILE BOI

RWY 16-34: H2800X50 (ASPH)

RWY 16: Railroad. RWY 34: Fence.

AIRPORT REMARKS: Unattended. Rwy 16 use extreme CAUTION: railroad boxcars are often parked on centerline.


COMMUNICATIONS: CTAF 122.9

ST ANTHONY**STANFORD FLD** (U12) 1 SE UTC-7(-6DT) N43°57.01' W111°41.08'**SALT LAKE CITY**4966 B **FUEL** 100LL, JET A TPA-5766(800) NOTAM FILE BOI**L-11D****RWY 04-22:** H4500X50 (ASPH) MIRL**RWY 04:** Thld dsplcd 300'. P-line.**RWY 22:** Thld dsplcd 540'. Tree.**AIRPORT REMARKS:** Unattended. Fuel 24 hr credit card svc avbl.


CAUTION: Acft opr from gravel rwy SE of paved rwy during agriculture season. Rwy 04-22 no dsplcd thld arrow markings on dsplcd thld. ACTIVATE MIRL Rwy 04-22-CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE BOI.**DUBOIS (H) VORTACW** 116.9 DBS Chan 116 N44°05.33'

W112°12.56' 095° 24.2 NM to fld. 4915/15E.


**ST MARIES MUNI** (S72) 1 NW UTC-8(-7DT) N47°19.57' W116°34.66'**GREAT FALLS**2127 B S2 **FUEL** 100LL NOTAM FILE BOI**L-13B****RWY 10-28:** H4250X60 (ASPH) S-12.5 MIRL (NSTD)**RWY 10:** PAPI(P2L)-GA 4.0°. TCH 39'. Thld dsplcd 715'. Trees.

Rgt tfc.

RWY 28: Trees.**AIRPORT REMARKS:** Attended on call 208-852-0941. Ultralight acft pattern established for Rwy 10 NW of rwy, rgt tfc. Rwy 10-28 NSTD MIRL first 715' west end not lgtd. Rwy 10 NSTD dsplcd thld marking yellow chevrons. ACTIVATE NSTD MIRL Rwy 10-28 and PAPI Rwy 10-CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE MLP.**MULLAN PASS (H) VORW/DME** 117.8 MLP Chan 125 N47°27.42'W115°38.76' 239° 38.8 NM to fld. 6100/20E. **HIWAS.****SALMON** N45°01.28' W114°05.06' NOTAM FILE SMN.**GREAT FALLS****(H) VORW/DME** 113.5 LKT Chan 82 036° 10.6 NM to Lemhi Co. 9258/18E.**H-1D, L-13C****RCO** 122.55 (BOISE RADIO)

SALMON**LEMHI CO** (SMN) 4 S UTC-7(-6DT) N45°07.43' W113°52.88'4043 B S4 **FUEL** 100, JET A NOTAM FILE SMN**RWY 17-35:** H5150X60 (ASPH) S-12.5 MIRL**RWY 17:** REIL. PAPI(P4L)—GA 3.5°. TCH 55'.**AIRPORT REMARKS:** Attended 1500-0000Z±. Rwy 17-35 N 500' sharp drop-off on W shoulder. Rwy 17 use rgt tfc pattern for ngt ops only. Bcn OTS indef. ACTIVATE MIRL Rwy 17-35, REIL and PAPI Rwy 17—CTAF.**WEATHER DATA SOURCES:** AWOS-3 135.075 (208) 756-4381.**COMMUNICATIONS:** CTAF/UNICOM 122.8**SALMON RCO** 122.55 (BOISE RADIO)**SALT LAKE CENTER APP/DEP CON** 132.4**RADIO AIDS TO NAVIGATION:** NOTAM FILE SMN.**SALMON (H) VORW/DME** 113.5 LKT Chan 82 N45°01.28'


W114°05.06' 036° 10.6 NM to fld. 9258/18E.

GREAT FALLS**H-1D, L-13C****IAP****SANDPOE** N48°17.44' W116°33.79' NOTAM FILE BOI.**NDB (MHW)** 264 SZT at Sandpoint. NDB unusable 360°-170° byd 15 NM; 170°-200° byd 20 NM; 200°-360°.**GREAT FALLS****L-13B****SANDPOINT** (SZT) 2 N UTC-8(-7DT) N48°17.97' W116°33.61'2131 B S4 **FUEL** 100LL, JET A OX 3, 4 NOTAM FILE SZT**RWY 01-19:** H5501X75 (ASPH) S-40 MIRL**RWY 01:** REIL. PAPI(P2L)—GA 3.75° TCH 28'. Tree.**RWY 19:** REIL. PAPI(P2L)—GA 3.75° TCH 28'. Trees.**AIRPORT REMARKS:** Attended 1500-0300Z± Summer, 1600-0100Z± Winter. Wildlife invof arpt. Rwy 01 additional obstruction: +23' railroad at 730' centerline, +65' P-line at 1800' on centerline, and +85' trees at 1900' on centerline. ACTIVATE MIRL Rwy 01-19 and REIL Rwy 01 and Rwy 19—CTAF. PAPI Rwy 01 and Rwy 19 opr continuously.**WEATHER DATA SOURCES:** AWOS-3 135.425 (208) 263-3074.**COMMUNICATIONS:** CTAF/UNICOM 122.7® **SEATTLE CENTER APP/DEP CON** 122.95**RADIO AIDS TO NAVIGATION:** NOTAM FILE GEG.**SPOKANE (H) VORTACW** 115.5 GEG Chan 102 N47°33.90'W117°37.61' 023° 61.6 NM to fld. 2756/21E. **HIWAS.****SANDPOE NDB (MHW)** 264 SZT N48°17.44' W116°33.79'

at fld. NOTAM FILE BOI.

ILS/DME 109.1 I-RPO Chan 28 Rwy 01. Localizer

unusable from 1 NM to rwy thld.

**GREAT FALLS****H-1C, L-13B****IAP****SHEARER (USFS)** (2U5) 0 S UTC-8(-7DT) N45°59.37' W114°50.48'

2634 NOTAM FILE BOI

RWY 18-36: 2000X15 (TURF)**RWY 18:** Hill. **RWY 36:** Trees.**AIRPORT REMARKS:** Unattended. Inexperienced pilots should use for emergencies only. Rwy may be soft in spring and late fall. Recommend early morning or late evening operations during summer. Rwy 18-36 first 300' of rwy rough. Big game animals on and invof arpt. Located in narrow winding river canyon. Land Rwy 18, takeoff Rwy 36. Blind apch to Rwy18; before landing/takeoff call on frequency. 122.9; monitor same. Ctc arpt manager 208-983-4060, for briefings and rwy conditions.**COMMUNICATIONS:** CTAF 122.9**GREAT FALLS****SHOSHONE CO** (See KELLOGG)

SLATE CREEK (1S7) 3 NW UTC-8(-7DT) N45°40.31' W116°18.34'

GREAT FALLS

1660 NOTAM FILE BOI

RWY 11-29: 2600X165 (TURF)

RWY 11: Fence.

RWY 29: P-line.

AIRPORT REMARKS: Unattended. No winter maintenance. No line of sight between rwy ends. Rwy 11-29 edges and thlds marked with white rock boundary markers. No telephone avbl at arpt.**COMMUNICATIONS:** CTAF 122.9**SMILEY CREEK** (See GALENA)**SMITH PRAIRIE** (See PRAIRIE)**SNAKE RIVER SPB** (See LEWISTON)**SODA SPRINGS****ALLEN H TIGERT** (U78) 1 SE UTC-7(-6DT) N42°38.91' W111°34.91'

SALT LAKE CITY

L-11D

5839 B FUEL 100LL NOTAM FILE U78

RWY 16-34: H3500X50 (ASPH) S-12 LIRL (NSTD)

RWY 16: TRCV(TRIL)—GA 4.0° TCH 25'. Thld dspcd 300'. Road.

RWY 34: TRCV(TRIL)—GA 3.0° TCH 44'.

RWY 13-31: H2500X50 (ASPH)

RWY 13: Pole.


RWY 31: Railroad.

AIRPORT REMARKS: Attended irregularly. Telephone

208-547-9927/2600 for svc. Sharply descending terrain near end of Rwy 31 and Rwy 34. Rwy 16-34 first 300' Rwy 16 pavement breaking up. Rwy 16-34 NSTD LIRL first 300' Rwy 16 not lgtd. Rwy 16 thld dspcd 300' at ngt, 3200' of Rwy 16-34 lgtd at ngt. ACTIVATE LIRL Rwy 16-34, TRCV Rwy 16 and Rwy 34—click CTAF 5 times.

WEATHER DATA SOURCES: SAWRS (dalgt observation only).**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE MLD.

MALAD CITY (H) VORW/DME 117.4 MLD Chan 121 N42°11.99' W112°27.07' 038° 47.1 NM to fld. 7330/17E.

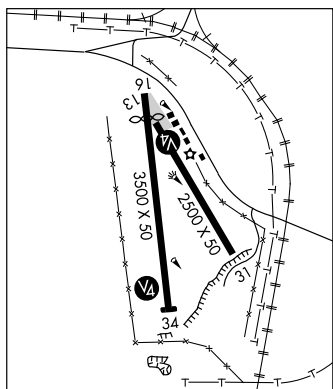**SOLDIER BAR USFS** (85U) 1 SW UTC-7(-6DT) N45°05.99' W114°48.06'

GREAT FALLS

4190 NOTAM FILE BOI

RWY 07-25: 1650X15 (DIRT)

RWY 25: Hill.

RWY 07: Trees.

AIRPORT REMARKS: Unattended. Steep canyon walls in all directions. Cabin Creek arpt approximately 7 miles west up Big Creek Canyon. Arpt on bench 500' above Big Creek on south side. West 1/2 of rwy has 4° slope down to the north. Go arounds not recommended. Rwy 07-25 sharp dog leg on W 1/2 of rwy to the north. Land Rwy 25, tkf Rwy 07. Rwy 25 thld marked with rocks. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9**SQUAW BUTTE** N44°00.71' W116°24.36'

SALT LAKE CITY

RCO 122.45 (BOISE RADIO)

L-11B

STANFORD FLD (See ST ANTHONY)**STANLEY** N44°10.19' W114°55.87'

SALT LAKE CITY

RCO 122.6 (BOISE RADIO)

L-11C

STANLEY**BRUCE MEADOWS** (U63) 20 NW UTC-7(-6DT) N44°24.93' W115°19.01'

SALT LAKE CITY

6370 NOTAM FILE BOI

RWY 05-23: 5000X110 (TURF-DIRT)**RWY 23:** Fence.

AIRPORT REMARKS: Unattended. Big game animals have access to rwy. No winter maintenance. Recommend land Rwy 05, tkf Rwy 23 when wind conditions permit. Arpt is located on a high mountain valley surrounded by mountains. Rwy 23 fence marked with yellow and black warning panels 40' from end of AER 23. Rwy 05-23 edges and thlds marked with white rocks. 20' wide dirt strip down center of Rwy 05-23.

COMMUNICATIONS: CTAF 122.9**STANLEY** (2U7) 1 SE UTC-7(-6DT) N44°12.51' W114°56.07'

SALT LAKE CITY

6403 NOTAM FILE BOI

RWY 17-35: 4300X150 (TURF-DIRT)**RWY 17:** Trees. **RWY 35:** Fence.

AIRPORT REMARKS: Unattended. No winter maintenance. Arpt located in valley surrounded by high mountainous terrain. Numerous air taxi operations during the summer months. Rwy 17-35 rwy edges and thlds marked with white rocks.

COMMUNICATIONS: CTAF 122.9

RCO 122.6 (BOISE RADIO)

THOMAS CREEK (2U8) 31 N UTC-7(-6DT) N44°43.58' W115°00.21'

GREAT FALLS

4400 NOTAM FILE BOI

RWY 03-21: 2100X75 (TURF-DIRT)**RWY 03:** Ridge. **RWY 21:** Trees.

AIRPORT REMARKS: Unattended. No winter maintenance. Recommend ldg Rwy 21, tkf Rwy 03, go arounds extremely difficult. Rwy 03 first 400' is dog leg with a heading of 360°. Acft loading and unloading at the south end of Rwy 21. Considerable air taxi operations mid to late summer. Rwy 03-21 usable width may vary from 75' to 100'. Arpt is located on plateau 100-150' abv river.

COMMUNICATIONS: CTAF 122.9**STEELHEAD** N42°54.97' W114°40.45' NOTAM FILE BOI.

SALT LAKE CITY

NDB (MHW) 211 HDG 255° 4.0 NM to Gooding Muni. NDB unusable byd 15 NM.

L-11C

STRIK N42°28.72' W114°21.27' NOTAM FILE TWF.

SALT LAKE CITY

NDB (LOM) 389 TW 256° 5.9 NM to Joslin Fld-Magic Valley Rgnl.**STURGEON** N43°06.80' W115°39.51' NOTAM FILE BOI.

SALT LAKE CITY

NDB (MHW) 333 STI 272° 3.4 NM to Mountain Home Muni. Unusable 320°-020° byd 15 NM.

L-11B

SWEDEN N43°25.93' W112°09.75' NOTAM FILE IDA.

SALT LAKE CITY

NDB (MHW) 350 SWU 024° 6.3 NM to Idaho Falls Rgnl.

L-11D

NDB unusable 025°-080° beyond 20 NM all altitude.

TANGLEFOOT SPB (See CAVANAUGH BAY)**THOMAS CREEK** (See STANLEY)**THREE CREEK****MURPHY HOT SPRINGS** (3UØ) 9 SW UTC-7(-6DT) N42°01.41' W115°20.13'

SALT LAKE CITY

5829 NOTAM FILE BOI

RWY 01-19: 5250X120 (TURF)**RWY 01:** Fence. **RWY 19:** Fence.

AIRPORT REMARKS: Unattended. Rwy 01-19 rodent damage. No winter maintenance. No line of sight between rwy ends. Recommend land Rwy 19 and depart Rwy 01 when wind conditions permit. Rwy soft in spring and when wet. Rwy 01-19 edges and thlds marked with white rock. No telephone avbl at arpt.

COMMUNICATIONS: CTAF 122.9**TWIN BRIDGES** (See KETCHUM)

TWIN FALLS N42°28.79' W114°29.37' NOTAM FILE TWF.

SALT LAKE CITY
H-3D, L-11C

(L) VORTACW 115.8 TWF Chan 105 at Joslin Fld-Magic Valley Rgnl. 4140/18E.

VOR portion unusable

115°-160° byd 30 NM blo 11,000'

115°-160° byd 33 NM blo 12,000'

DME unusable

105°-160° byd 20 NM blo 15,000'

RCO 122.25 (BOISE RADIO)

TWIN FALLS

JOSLIN FLD-MAGIC VALLEY RGNL (TWF) 4 S UTC-7(-6DT)

SALT LAKE CITY
H-3D, L-11C

N42°28.91' W114°29.27'

4154 B S4 FUEL 100LL, JET A1 + OX 1, 3 Class I, ARFF Index A NOTAM FILE TWF

IAP, AD

RWY 07-25: H8703X150 (ASPH-PFC) S-75, D-200, 2S-175,

2D-250 HIRL

RWY 07: REIL. VASI(V4L)—GA 3.0° TCH 50'.

RWY 25: MALSR. PAPI(P4L)—GA 3.0° TCH 55'.

RWY 12-30: H3224X150 (ASPH) S-19 1.3% up SE

RWY 12: Trees. RWY 30: Antenna.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 07	12-30	4500
RWY 25	12-30	3600

AIRPORT REMARKS: Attended 1330-0300Z†. Additional fuel service fee between 0300-1330Z†, call 208-733-5920 or 539-4034 for information. Skydiving on arpt north of Rwy 25 apch end. No line of sight between apch end of Rwy 25 and apch end of Rwy 12. PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 208-733-5215. Rwy 12-30 and Twy G, Twy H, Twy J and Twy K non-air carrier movement area. When twr clsd ACTIVATE HIRL Rwy 07-25, MALSR Rwy 25, REIL Rwy 07—CTAF. Landing fee for all FAR Part 121, 135 operators and general aviation Part 91 acft greater than 12,500 lbs maximum gross landing weight. For information ctc airport manager 208-733-5215.

WEATHER DATA SOURCES: ASOS 135.025 (208) 733-1878.

COMMUNICATIONS: CTAF 118.2 UNICOM 122.95

TWIN FALLS RCO 122.25 (BOISE RADIO)

TWIN FALLS APP/DEP 126.7 (1300-0400Z†)

Ⓡ SALT LAKE CENTER APP/DEP CON 118.05 (0400-1300Z†)

TWIN FALLS TOWER 118.2 (1300-0400Z†) GND CON 121.7 CLNC DEL 123.65

AIRSPACE: CLASS D svc 1300-0400Z† other times CLASS E.


RADIO AIDS TO NAVIGATION: NOTAM FILE TWF.

TWIN FALLS (L) VORTACW 115.8 TWF Chan 105 N42°28.79' W114°29.37' at fld. 4140/18E.

STRIK NDB (LOM) 389 TW N42°28.72' W114°21.27' 256° 5.9 NM to fld.

ILS 108.3 I-TWF Rwy 25. Class IE. LOM STRIK NDB. ILS unmonitored when twr closed.

COMM/NAV/WEATHER REMARKS: Freq 121.5 not avbl at twr.



TYHEE N42°57.83' W112°30.98' NOTAM FILE PIH.

SALT LAKE CITY
L-11C

NDB (LOM) 383 PI 210° 4.8 NM to Pocatello Rgnl. Unmonitored when twr clsd.

UCONN N43°35.87' W111°58.84' NOTAM FILE IDA.

SALT LAKE CITY

NDB (LOM) 324 ID 201° 6.4 NM to Idaho Falls Rgnl.

UPPER LOON CREEK USFS (See CHALLIS)

USTIK N43°35.81' W116°18.91' NOTAM FILE BOI.

SALT LAKE CITY
L-11B

NDB (HW/LOM) 359 BO 099° 4.5 NM to Boise Air Terminal (Gowen Fld).

WARM SPRINGS CREEK (See LOWMAN)

WARREN (USFS) (3U1) 0 NW UTC-7(-6DT) N45°16.09' W115°41.01'

GREAT FALLS

5896 NOTAM FILE BOI

RWY 11-29: 2765X50 (DIRT)

RWY 11: Trees.

RWY 29: Road.

AIRPORT REMARKS: Unattended. No winter maintenance. Rwy width varies from 65' to 85'. Rwy 11-29 thlds marked with white rock. Recommend land Rwy 11, tkf Rwy 29 when wind conditions allow. Downdrafts prevalent Rwy 11 summer months. Recommended use early morning and late evening in summer. Not recommended for inexperienced pilots. Road crosses rwy approximately 800' from Rwy 11 thld. No telephone avbl at arpt. Rwy 11-29 has some loose rocks to 2 inches in diameter, isolated spots of embedded flat rocks to 6 inches in diameter and some spotty weed growth to 12 inches.

COMMUNICATIONS: CTAF 122.9**WEATHERBY USFS** (See ATLANTA)**WEISER MUNI** (S87) 3 S UTC-7(-6DT) N44°12.28' W116°57.63'

SALT LAKE CITY

2120 B S3 FUEL 100LL NOTAM FILE BOI

L-11B

RWY 12-30: H4000X60 (ASPH) S-12.5 MIRL

IAP

RWY 12: REIL. Trees.

RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 50'.


AIRPORT REMARKS: Attended continuously. Birds on and in vicinity of arpt. Extensive agricultural ops Mar-Oct. ACTIVATE MIRL Rwy 12-30 and REIL Rwy 12 and Rwy 30—CTAF. PAPI Rwy 30 opr continuously.

COMMUNICATIONS: CTAF/UNICOM 122.8

SALT LAKE CENTER APP/DEP CON 128.05

RADIO AIDS TO NAVIGATION: NOTAM FILE BOI.

DONNELLY (H) VORTACW 116.2 DNJ Chan 109 N44°46.03' W116°12.38' 205° 46.8 NM to fld. 7333/19E.

**YELLOW PINE****JOHNSON CREEK** (3U2) 3 S UTC-7(-6DT) N44°54.73' W115°29.14'

GREAT FALLS

4933 NOTAM FILE BOI

RWY 17-35: 3400X150 (TURF)

RWY 17: Ridge.

RWY 35: Fence.

AIRPORT REMARKS: Attended Jun-Aug, Thu-Mon 1500-0000Z±. Big game animals on and invof arpt. No winter maintenance. Recommend land Rwy 17, tkf Rwy 35 when wind conditions allow. Rwy 17-35 plus 60' trees 100' each side of centerline. Be alert for sprinklers on rwy. Additional 250' of length avbl for tkf on Rwy 35 end. Rwy 17-35 edges and thlds marked with white rocks. Special considerations should be given to density altitude, turbulence and mountain flying proficiency.

COMMUNICATIONS: CTAF 122.9

2010 U.S. & CANADIAN MILITARY AERIAL AIRCRAFT/PARACHUTE DEMONSTRATIONS

During calendar year 2010, the U.S. and Canadian Military Aerial Demonstration Teams (Thunderbirds, Blue Angels, Snowbirds, and Golden Knights) will be performing on the dates and locations listed below.

Pilots should expect Temporary Flight Restrictions (TFR) in accordance with 14 CFR Section 91.145, Management of aircraft operations in the vicinity of aerial demonstrations and major sporting events. The dimensions and effective times of the TFRs may vary based upon the specific aerial demonstration event and will be issued via the U.S. NOTAM system. Pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding these airspace restrictions.

The currently scheduled 2010 aerial demonstration locations, subject to change without notice, are:

DATE:	USAF Thunderbirds	USN Blue Angels	USA Golden Knights	Canadian Snowbirds
September 25-26	McConnell AFB, KS	MCAS Kaneohe Bay, HI		Chico, CA
October 1-3		MCAS Miramar, CA		MCAS Miramar, CA
2-3	Salinas, CA		MCAS Miramar, CA	
2-3			Jackson, MS	
9-10	Little Rock AFB, AR	San Francisco, CA	Little Rock, AFB, AR	Daytona Beach, FL
16-17	El Paso, TX	Dobbins AFB, GA	El Paso, TX	Atlanta, GA
23-24		NAS Jacksonville, FL		
	Houston, TX		Washington, DC	
30-31		Ft Worth Alliance, TX	Ft Worth Alliance, TX	
	Cocoa Beach, FL			
November 6-7	Lackland AFB, TX	Homestead ARB, FL	Lackland AFB, TX	
6-7			Homestead ARB, FL	
11-14			Ft Bragg, NC	
12-13		NAS Pensacola, FL		
13-14	Nellis AFB, NV			

Note: Dates and locations are scheduled "show dates" only and do not reflect arrival or practice date TFR periods that may precede the specific aerial demonstration events listed above. Again, pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding any airspace restrictions.

**VFR ADVISORY AREA
Canadian Airspace
VICTORIA-VANCOUVER
(Effective: Until Further Notice)**

Effective 0901 UTC August 6, 1994, a VFR Advisory Area was permanently established between the two Canadian control zones, from above 1,200' MSL up to 2,500' MSL. Vancouver and Victoria Towers provide radar traffic information to all participating aircraft within the VFR Advisory Area.

PROCEDURES

Victoria/Vancouver

*All aircraft operating between Victoria and Vancouver within the VFR Advisory Area should follow the routes shown on the graphic.

***Northbound:** Change from Victoria Tower, 119.1, to Vancouver Tower, 124.0, when instructed by ATC.

***Southbound:** Change from Vancouver Tower, 124.0, to Victoria Tower, 119.1, when instructed by ATC.

*Set transponder codes as requested.


TRANSITING TRAFFIC

*Call Vancouver Tower on 124.0 when north of the Active Pass/Samuel Island Line.

*Call Victoria Tower on 119.1 when south of the Active Pass/Samuel Island Line.

*Set Transponder codes as requested.

Routes and recommended altitudes will not be useable by all aircraft at all times because of weather and regulations pertaining to flight over water. Higher altitudes may be requested. If unable to maintain VFR, advise ATC.



CONTROLLED FIRING

Fort Harrison Controlled Firing Area Helena, Montana

Controlled firing occurs in the vicinity of the Helena, Montana VORTAC (HLN) 24 hours daily, 5'800 MSL and BELOW. The area defined by the following radial/DME coordinates HLN258008, HLN258005, HLN250008, HLN250005.

CONTROLLED FIRING

Limestone Hills Controlled Firing Area Helena, Montana

Controlled firing occurs in the vicinity of the Helena, Montana VORTAC (HLN) 24 hours daily, FL180 and BELOW. The area defined by the following radial/DME coordinates HLN125026, HLN127028, HLN140025, HLN125028.

SPECIAL NORTH ATLANTIC, CARIBBEAN AND PACIFIC AREA COMMUNICATIONS

VHF air-to-air frequencies enable aircraft engaged in flights over remote and oceanic areas out of range of VHF ground stations to exchange necessary operational information and to facilitate the resolution of operational problems.

Frequencies have been designated as follows:

North Atlantic area:	123.45 MHz
Caribbean area:	123.45 MHz
Pacific area:	123.45 MHz

MOUNT ST. HELENS NATIONAL VOLCANIC MONUMENT, WASHINGTON

The U.S. Geological Survey (USGS) and the U.S. Forest Service (USFS) conduct low level flights to and from monitor station within the monument and within the crater itself. Due to this activity, the volatility of the volcano and a high volume of sightseeing flights in the area, the following procedures are recommended in the interest of flying safety.

1. VFR aircraft are encouraged to transmit an initial position report on 122.75 MHz in the blind when flying at altitudes of less than 10,000 feet MSL within 10 nautical miles of the Mount St. Helens volcano crater.

2. VFR flight below 3000 feet AGL – strongly not recommended.

3. VFR flight above 3000 feet AGL – fly a counterclockwise pattern, no closer than 3 miles to the volcano summit. VFR rules of "see and be seen" and good airmanship practices will prevail. Approval to land can only be obtained through appropriate Federal or State authority. Any significant information will be broadcast on the transcribed weather broadcasts by the Seattle and McMinville Flight Service Stations and available on the Portland and Seattle ATIS. Marginal radar coverage limits Seattle Center's ability to provide radar flight following to aircraft in orbit of the volcano.

DEVILS TOWER NATIONAL MONUMENT, WYOMING

For reasons of national welfare, pilots are requested to avoid flights within 3 nautical miles of Devils Tower National Monument.

BIRD HAZARD OREGON AND WASHINGTON

Heavy concentration of migratory and wintering flocks of large waterfowl from the Canadian to California borders annually November to May. Caution advised at all airports or while transiting area.

SIMULTANEOUS OPERATIONS

Boeing Field/King County International Airport Seattle, Washington

All users: Boeing Field Airport Traffic Control Tower is authorized to conduct simultaneous same direction operations to parallel runways, between sunrise and sunset, for Category II aircraft and smaller.

Spokane International Airport Spokane, Washington

Application of visual separation for simultaneous operations. When weather conditions at Spokane International Airport are 1500' ceiling and 5 miles visibility or greater Spokane International Airport controllers may provide visual separation of aircraft landing and departing simultaneously at Spokane International Airport and Fairchild Airforce Base.

LASER LIGHT DEMONSTRATIONS

Bozeman, Montana

A laser light demonstration will be conducted daily between 0000 and 2359 MDT until June 24, 2011 at Montana State University BZN VORTAC 129 radial at 8 NM LAT 45–39–59N/Long 111–02–44W. The laser beam elevation will be a maximum of 090 and a minimum of 089. The beam may be injurious to eyes when viewed within 12000 feet AGL vertically and 500 feet laterally of the light source. Cockpit illumination–flash blindness may occur beyond these distances.

SEATTLE-TACOMA INTL SEATTLE, WASHINGTON

Gatehold Procedures:

During peak departure periods, gatehold procedures are implemented for all IFR departures. Additional information will be broadcast on ATIS.

Oceanic Departures:

1. Contact Clearance Delivery *only* when you will be ready to taxi within ten minutes. State destination, requested altitude, "ten minutes to taxi."
2. If ATC delays are more than 15 minutes for your filed altitude/route, alternatives with less delay will be offered.
3. Failure to depart the gate within ten minutes or reach the runway at the release time specified in the IFR clearance may result in the cancellation of your clearance.

MOUNTAIN HOME, IDAHO

All aircraft operating within 20 NM of the Liberator VOR are requested to contact Mountain Home APP CON on 124.8 for traffic advisory due to intensive military training in the Mountain Home area.

MILITARY TRAINING ROUTES

The DOD Flight Information Publication AP/1B provides textual and graphic descriptions and operating instructions for all military training routes (IR, VR, SR) and refueling tracks/anchors. Complete and more comprehensive information relative to policy and procedures for IRs and VRs is published in FAA Handbook 7610.4 (Special Military Operations) which is agreed to by the DOD and therefore directive for all military flight operations. The AP/1B is the official source of route data for military users.

CIVIL USE OF MILITARY FIELDS:

U.S. Army, Air Force, Navy and Coast Guard Fields are open to civil fliers only in emergency or with prior permission. Army installations, prior permission is required from the Commanding Officer of the installation.

For Air Force installations, prior permission should be requested at least 30 days prior to first intended landing from either Headquarters USAF (PRPOC) or the Commander of the installation concerned (who has authority to approve landing rights for certain categories of civil aircraft). For use of more than one Air Force installation, requests should be forwarded direct to Hq USAF (PRPOC), Washington, D.C. 20330.

Use of USAF installations must be specifically justified.

For Navy and Marine Corps installations, prior permission should be requested at least 30 days prior to first intended landing. An Aviation Facility License must be approved and executed by the Navy prior to any landing by civil aircraft.

Forms and further information may be obtained from the nearest U.S. Navy or Marine Corps aviation activity.

For Coast Guard fields prior permission should be requested from the Commandant, U.S. Coast Guard via the Commanding Officer of the field.

When instrument approaches are conducted by civil aircraft at military airports, they shall be conducted in accordance with the procedures and minimums approved by the military agency having jurisdiction over the airport.

AIRCRAFT LANDING RESTRICTIONS

Landing of aircraft at locations other than public use airports may be a violation of Federal or local law. All land and water areas are owned or controlled by private individuals or organizations, states, cities, local governments, or U.S. Government agencies. Except in emergency, prior permission should be obtained before landing at any location that is not a designated public use airport or seaplane base.

Landing of aircraft is prohibited on lands or water administered by the National Park Service, U.S. Fish and Wildlife Service, U.S. Forest Service, and on many areas controlled by the U.S. Army Corps of Engineers, unless prior authorization is obtained from the respective agency.

CONTINUOUS POWER FACILITIES

In order to insure that a basic ATC system remains in operation despite an areawide or catastrophic commercial power failure, key equipment and certain airports have been designated to provide a network of facilities whose operational capability can be utilized independent of any commercial power supply.

In addition to those facilities comprising the basic ATC system, the following approach and lighting aids have been included in this program for a selected runway.

1. ILS (Localizer, Glide Slope, COMLO, Inner, Middle and Outer Markers)
2. Wind Measuring Capability
3. Approach Light System (ALS) or Short ALS (SALS)
4. Ceiling Measuring Capability
5. Touchdown Zone Lighting (TDZL)
6. Centerline Lighting (CL)
7. Runway Visual Range (RVR)
8. High Intensity Runway Lighting (HIRL)
9. Taxiway Lighting
10. Apron Light (Perimeter Only)

The following have been designated "Continuous Power Airports," and have independent back up capability for the equipment installed.

Airport/Ident	Runway No.	Airport/Ident	Runway No.
Albuquerque, NM (ABQ)	08	Milwaukee, WI (MKE)	01L
Andrews AFB, MD (ADW)	01L	Minneapolis, MN (MSP)	30L
Anchorage, AK (ANC)	07R	Nashville, TN (BNA)	02L
Atlanta, GA (ATL)	09R	New Orleans, LA (MSY)	10
Baltimore, MD (BWI)	10	New York, NY (JFK)	04R
Bismarck, ND (BIS)	31	New York, NY (LGA)	22
Boise, ID (BOI)	10R	Newark, NJ (EWR)	04R
Boston, MA (BOS)	04R	Oklahoma City, OK (OKC)	35R
Charlotte, NC (CLT)	36L	Omaha, NE (OMA)	14R
Chicago, IL (ORD)	10	Ontario, CA (ONT)	26L
Cincinnati, OH (CVG)	36C	Philadelphia, PA (PHL)	09R
Cleveland, OH (CLE)	06R	Phoenix, AZ (PHX)	08
Dallas/Fort Worth, TX (DFW)	17C	Pittsburgh, PA (PIT)	10L
Denver, CO (DEN)	35R	Reno, NV (RNO)	16R
Des Moines, IA (DSM)	31	Salt Lake City, UT (SLC)	34L
Detroit, MI (DTW)	03R	San Antonio, TX (SAT)	12R
El Paso, TX (ELP)	22	San Diego, CA (SAN)	09
Fairbanks, AK (FAI)	01L	San Francisco, CA (SFO)	28R
Great Falls, MT (GTF)	03	San Juan, PR (SJU)	08
Honolulu, HI (HNL)	08L	Seattle, WA (SEA)	16C
Houston, TX (IAH)	26L	St. Louis, MO (STL)	30R
Indianapolis, IN (IND)	05L	Tampa, FL (TPA)	36L
Jacksonville, FL (JAX)	07	Tulsa, OK (TUL)	36R
Kansas City, MO (MCI)	19R	Washington, DC (DCA)	01
Los Angeles, CA (LAX)	24R	Washington, DC (IAD)	01R
Memphis, TN (MEM)	36L	Wichita, KS (ICT)	01L
Miami, FL (MIA)	08R		

NOTE—The existing CPA runway is listed. Pending and future changes at some locations will require a revised runway designation.

Night Vision Lights Out Operations Yakima Training Center, Washington

Military helicopter activity will be conducted for night vision lights out training at Yakima Training Center, Washington. Position lights will be extinguished or greatly reduced in intensity. The training will be conducted within the confines of the YTC reservation but outside of the restricted airspace. The general description of the night vision goggle (NVG) training area is that airspace bordered by R-6714H on the south, Highline Canal on the west, the southern edge of Interstate 90 on the north, and Ginko State Park Petified Forest on the east.

The boundaries of the NVG area are:

Beginning at lat. 46°55'03"N, long. 120°01'34"W;
to lat. 46°55'40"N, long. 120°01'35"W;
to lat. 46°55'39"N, long. 120°02'52"W;
to lat. 46°56'15"N, long. 120°02'52"W
thence west along the southern edge of Interstate 90;
to lat. 46°57'21"N, long. 120°18'08"W;
thence west/southwest along the Highline Canal;
to lat. 46°55'24"N, long. 120°19'55"W;
to point of beginning.

Times of use: Sunset to sunrise, daily.


Request Publication date of May 22, 1997.

Please refer any questions to James Riley, ANM-532.2, at (206) 227-2537.

LIGHTS-OUT OPERATIONS Hays MOA, Montana

Lights-out night vision goggle training operations conducted within the Hays MOA at all altitudes from sunset to sunrise when MOA is active by NOTAM. Contact Salt Lake City ARTCC on 133.4 or 119.75 or Great Falls FSS for schedule and NOTAM information.

FIREFIGHTING TRAFFIC AREAS

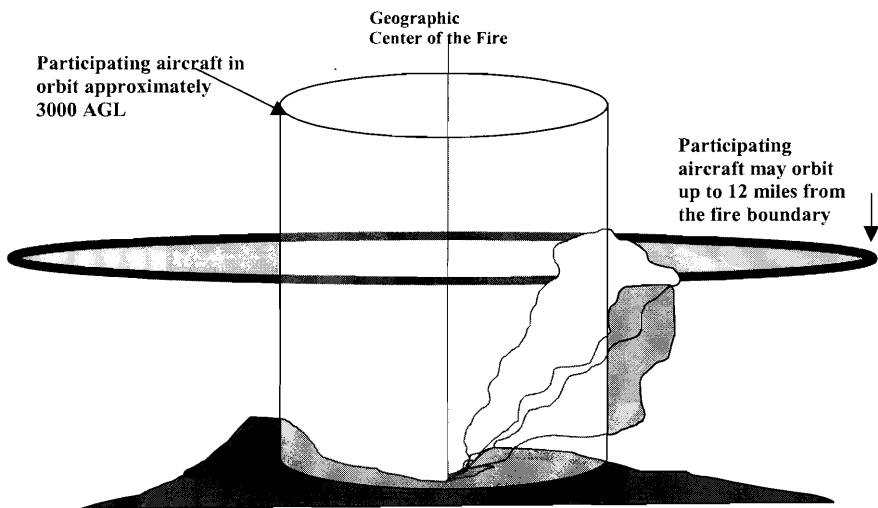

Pilots are advised to stay clear of Firefighting Traffic Areas. Remain 15 miles from the area of activity. If you must over-fly the area, do so at an altitude of 5000 feet AGL above. However, to remain safe and out of the way of working aircraft, it is best to circumnavigate the area.

The wild-land fire environment can be very complex and involve a large number and variety of aircraft types including fixed and rotary wing aircraft. Some of the aircraft are small single and multi-engine command and control platforms that can be especially difficult to see and may give the appearance that the fire is not staffed. The aircraft participating in firefighting can orbit as far out as 12 miles from the perimeter of the fire. Any intrusion by aircraft not directly involved in the firefighting operation could delay the delivery of much needed retardant or water to ground firefighters and will adversely affect the safety of participating aircraft. Please stay well away from wild-land fires even if you feel that aircraft are not working the fire; they may be en route or unseen.

If you see a fire developing along your route, report it immediately to air traffic control who will advise the US Forest Service. The firefighting community would welcome this information.

The following narratives summarize the FAR Part 93 Special Air Traffic Rules, and Airport Traffic Patterns in effect as prescribed in the rule. This information is advisory in nature and in no way relieves the pilot from compliance with the specific rules set forth in FAR Parts 91 and 93.

Special Airport Traffic Areas prescribed in Part 93 are depicted on Sectional Aeronautical Charts, World Aeronautical Charts, Enroute Low Altitude Charts, and where applicable, on VFR Terminal Area Charts.

OPERATIONS RESERVATIONS FOR HIGH DENSITY TRAFFIC AIRPORTS KENNEDY, LAGUARDIA, AND WASHINGTON REAGAN NATIONAL

The Federal Aviation Administration (FAA) has designated New York's Kennedy and LaGuardia Airports and Washington Reagan National Airport as High Density Traffic Airports (HDTA), Title 14, Code of Federal Regulations, part 93, subpart K, and has prescribed air traffic rules and requirements for operating aircraft (excluding helicopters) to and from those airports during certain hours.

Reservations are required for operations from 6 a.m. through 11:59 p.m. local time at LaGuardia Airport and Washington Reagan National Airport. Reservations at Kennedy Airport are required from 3 p.m. through 7:59 p.m. local time.

Reservation procedures are detailed in Advisory Circular 93-1, Reservations for Unscheduled Operations at High Density Traffic Airports. A copy of the advisory circular is available on the FAA website at <http://www.faa.gov>. Reservations for unscheduled operations are allocated through the Enhanced Computer Voice Reservation System (e-CVRS) accessible via telephone or the Internet. This system may not be used to make reservations for scheduled air carrier or commuter flights.

The toll-free telephone number for accessing e-CVRS is 1-800-875-9694 and is available for calls originating within the United States, Canada, and the Caribbean. Users outside the toll-free areas may access e-CVRS by calling the toll number of 703-707-0568. The Internet web address for accessing the e-CVRS is <http://www.fly.faa.gov/ecvrs>. If you have any questions about reservation requirements or are experiencing problems with the system, you may telephone the Airport Reservation Office at the Air Traffic Control System Command Center at (703) 904-4452.

Requests for instrument flight rules (IFR) reservations will be accepted beginning 72 hours prior to the proposed time of operation at the high-density airport. For example, a request for an 11 a.m. reservation on a Thursday will be accepted beginning at 11 a.m. on the previous Monday.

IFR reservations must be obtained prior to IFR landing or takeoff at an HDTA during slot controlled hours. An air traffic control (ATC) clearance does not constitute a reservation. A reservation does not constitute permission to operate at an HDTA if additional operational limits or procedures are required by NOTAM and/or regulation.

Aircraft involved in medical emergencies will be handled by ATC without regard to a reservation after obtaining prior approval of the ATC System Command Center on (703) 904-4452. ATC will accommodate declared other emergency situations without regard to slot reservations.

NOTE: Visual flight rule (VFR) reservations via ATC for unscheduled operations at LaGuardia are not authorized from 7 a.m. through 8:59 a.m. local time and 4 p.m. through 6:59 p.m. local time, Monday through Friday and Sunday evenings, unless otherwise announced by NOTAM. Both IFR and VFR operations during those time periods must obtain an advance reservation through e-CVRS.

FSS TELEPHONE NUMBERS

Flight Service Station (FSS) facilities provide flight planning and weather briefing services to pilots. FSS services in the contiguous United States, Hawaii and Puerto Rico, are provided by a network of large FSS facilities and a few select remote facilities some of which operate part-time. Because of the interconnectivity between the facilities, all FSS services including radio frequencies are available continuously using published data.

Telephone Information Briefing Service (TIBS) is a FSS service that provides continuous recordings of meteorological and/or aeronautical information. A touch-tone telephone is required to fully utilize this service.

Further information can be found in the Aeronautical Information Manual (AIM).

NATIONAL FSS TELEPHONE NUMBER

Pilot Weather Briefings 1-800-WX-BRIEF (1-800-992-7433)

OTHER FSS TELEPHONE NUMBERS (except in Alaska)

TIBS (see description above) 1-877-4TIBS-WX (1-877-484-2799)

Clearance Delivery Only 1-888-766-8267

Lifeguard Flights Only 1-877-LIF-GRD3 (1-877-543-4733)

Flights within DC SFRA & FRZ * 1-866-225-7410

* District of Columbia Special Flight Rules Area & Flight Restricted Zone

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

TAF KPIT 091730Z 091818 15005KT 5SM HZ.FEW020 WS010/31022KT
FM1930 30015G25KT 3SM SHRA OVC015 TEMPO 2022 1/2SM +TSRA
OVC008CB
FM0100 27008KT 5SM SHRA BKN020 OVC040 PROB40 0407 1SM -RA BR
FM1015 18005KT 6SM -SHRA OVC020 BECMG 1315 P6SM NSW SKC

METAR KPIT 091955Z COR 22015G25KT 3/4SM R28L/2600FT TSRA OVC010CB
18/16 A2992 RMK SLP045 T01820159

Forecast	Explanation	Report
TAF	Message type: <u>TAF</u> -routine or <u>TAF AMD</u> -amended forecast, <u>METAR</u> -hourly, <u>SPECI</u> -special or <u>TESTM</u> -non-commissioned ASOS report	METAR
KPIT	ICAO location indicator	KPIT
091730Z	Issuance time: ALL times in UTC " <u>Z</u> ", 2-digit date, 4-digit time	091955Z
091818	Valid period: 2-digit date, 2-digit beginning, 2-digit ending times	
	In U.S. METAR : <u>COR</u> rected ob; or <u>AUTO</u> mated ob for automated report with no human intervention; omitted when observer logs on	COR
15005KT	Wind: 3 digit true-north direction, nearest 10 degrees (or <u>VariaBle</u>); next 2-3 digits for speed and unit, <u>KT</u> (KMH or MPS); as needed, <u>Gust</u> and maximum speed; 00000KT for calm; for METAR , if direction varies 60 degrees or more, <u>Variability</u> appended, e.g. 180 <u>V</u> 260	22015G25KT
5SM	Prevailing visibility: in U.S., <u>Statute Miles</u> & fractions; above 6 miles in TAF <u>Plus</u> 6SM. (Or, 4-digit minimum visibility in meters and as required, lowest value with direction)	3/4SM
	Runway Visual Range: <u>R</u> ; 2-digit runway designator <u>Left</u> , <u>Center</u> , or <u>Right</u> as needed; <u>"I"</u> ; <u>Minus</u> or <u>Plus</u> in U.S., 4-digit value, <u>FeeT</u> in U.S., (usually meters elsewhere); 4-digit value <u>Variability</u> 4-digit value (and tendency <u>Down</u> , <u>Up</u> or <u>No</u> change)	R28L/2600FT
HZ	Significant present, forecast and recent weather: see table (on back)	TSRA
FEW020	Cloud amount, height and type: <u>SKY</u> <u>C</u> lear 0/8, <u>FEW</u> >0/8-2/8, <u>SCaT</u> tered 3/8-4/8, <u>BroKeN</u> 5/8-7/8, <u>OVer</u> Cast 8/8; 3-digit height in hundreds of ft; <u>Towering CU</u> mulus or <u>CumulonimBus</u> in METAR ; in TAF , only <u>CB</u> . <u>Vertical</u> <u>Visib</u> ility for obscured sky and height "VV004". More than 1 layer may be reported or forecast. In automated METAR reports only, <u>CLeaR</u> for "clear below 12,000 feet"	OVC010CB
	Temperature: degrees Celsius; first 2 digits, temperature <u>"I"</u> last 2 digits, dew-point temperature; <u>Minus</u> for below zero, e.g., M06	18/16
	Altimeter setting: indicator and 4 digits; in U.S., <u>A</u> -inches and hundredths; (<u>Q</u> -hectoPascals, e.g., Q1013)	A2992

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

Forecast	Explanation	Report
WS010/31022KT	In U.S. TAF , non-convective low-level ($\leq 2,000$ ft) <u>Wind Shear</u> ; 3-digit height (hundreds of ft); <u>"Z"</u> ; 3-digit wind direction and 2-3 digit wind speed above the indicated height, and unit, <u>KT</u>	RMK SLP045 T01820159
FM1930	In METAR , <u>ReMark</u> indicator & remarks. For example: <u>Sea-Level Pressure</u> in hectoPascals & tenths, as shown: 1004.5 hPa; <u>Temp/dew-point</u> in tenths °C, as shown: temp. 18.2°C, dew-point 15.9°C	
TEMPO 2022	<u>From</u> and 2-digit hour and 2-digit minute beginning time: indicates significant change. Each FM starts on new line, indented 5 spaces.	
PROB40 0407	<u>TEMPO</u> rary: changes expected for < 1 hour and in total, < half of 2-digit hour beginning and 2-digit hour ending time period	
BECMG 1315	<u>PROB</u> ability and 2-digit percent (30 or 40): probable condition during 2-digit hour beginning and 2-digit hour ending time period	
	<u>BEC</u> oming: change expected during 2-digit hour beginning and 2-digit hour ending time period	

Table of Significant Present, Forecast and Recent Weather - Grouped in categories and used in the order listed below; or as needed in TAF, No Significant Weather.

QUALIFIER			
Intensity or Proximity			
- Light	"no sign"	Moderate	+ Heavy
VC Vicinity: but not at aerodrome; in U.S. METAR , between 5 and 10SM of the point(s) of observation; in U.S. TAF , 5 to 10SM from center of runway complex (elsewhere within 8000m)			
Descriptor			
MI Shallow	BC Patches	PR Partial	TS Thunderstorm
BL Blowing	SH Showers	DR Drifting	FZ Freezing
WEATHER PHENOMENA			
Precipitation			
DZ Drizzle	RA Rain	SN Snow	SG Snow grains
IC Ice crystals	PL Ice pellets	GR Hail	GS Small hail/snow pellets
UP Unknown precipitation in automated observations			
Obscuration			
BR Mist ($\geq 5/8$ SM)	FG Fog ($< 5/8$ SM)	FU Smoke	VA Volcanic ash
SA Sand	HZ Haze	PY Spray	DU Widespread dust
Other			
SQ Squall	SS Sandstorm	DS Duststorm	PO Well developed dust/sand whirls
FC Funnel cloud	+FC tornado/waterspout		

- Explanations in parentheses "()" indicate different worldwide practices.
 - Ceiling is not specified; defined as the lowest broken or overcast layer, or the vertical visibility.
 - **NWS TAFs** exclude turbulence, icing & temperature forecasts; **NWS METARs** exclude trend fcsts
 - Although not used in US, Ceiling And Visibility OK replaces visibility, weather and clouds if: visibility ≥ 10 km; no cloud below 5000 ft (1500 m) or below the highest minimum sector altitude, whichever is greater and no CB; and no precipitation, TS, DS, SS, MIFG, DRDU, DRSA or DRSN.
- UNITED STATES DEPARTMENT OF COMMERCE**
- NOAA/PA 96052 National Oceanic and Atmospheric Administration—National Weather Service**

Air Traffic Control System Command Center

Main Number703-904-4400

RGNL AIR TRAFFIC DIVISIONS

REGION	TELEPHONE
Alaskan	907-271-5464
Central	816-329-2500
Eastern	718-553-4502
Great Lakes	847-294-7202
New England	781-238-7500
Northwest Mountain	425-227-2500
Southern	404-305-5500
Southwest	817-222-5500
Western Pacific	310-725-6500

AIR ROUTE TRAFFIC CONTROL CENTERS (ARTCCs)

ARTCC NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque	817-222-5006	7:30 a.m.-4:00 p.m.	505-856-4300
Anchorage	907-271-5936	7:30 a.m.-4:00 p.m.	907-269-1137
Atlanta	404-305-5180	7:30 a.m.-5:00 p.m.	770-210-7601
Boston	617-238-7001	7:30 a.m.-4:00 p.m.	603-879-6633
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	630-906-8221
Cleveland	847-294-8400	8:00 a.m.-4:00 p.m.	440-774-0310
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-651-4100
Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	817-858-7300
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-5300
Indianapolis	847-294-8400	8:00 a.m.-4:00 p.m.	317-247-2231
Jacksonville	404-305-5180	8:00 a.m.-4:30 p.m.	904-549-1501
Kansas City	816-329-3000	7:30 a.m.-4:00 p.m.	913-254-8500
Los Angeles	661-265-8200	7:30 a.m.-4:00 p.m.	661-265-8200
Memphis	404-305-5180	7:30 a.m.-4:00 p.m.	901-368-8103
Miami	404-305-5180	7:00 a.m.-3:30 p.m.	305-716-1500
Minneapolis	847-294-8400	8:00 a.m.-4:00 p.m.	651-463-5580
New York	718-995-5426	8:00 a.m.-4:40 p.m.	516-468-1001
Oakland	310-725-3300	6:30 a.m.-3:00 p.m.	510-745-3331
Salt Lake City	425-227-1389	7:30 a.m.-4:00 p.m.	801-320-2500
Seattle	425-227-1389	7:30 a.m.-4:00 p.m.	253-351-3500
Washington	718-995-5426	8:00 a.m.-4:30 p.m.	703-771-3401

MAJOR TERMINAL RADAR APPROACH CONTROLS (TRACONs)

TRACON NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Atlanta	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	847-608-5509
Dallas/Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	972-615-2500
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1500
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-8400
New York	718-995-5426	8:00 a.m.-4:30 p.m.	516-683-2901
Northern CA	310-725-3300	7:00 a.m.-3:30 p.m.	916-366-4001
Potomac	718-995-5426	8:00 a.m.-4:30 p.m.	540-349-7500
Southern CA	310-725-3300	7:30 a.m.-4:00 p.m.	858-537-5800

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

KEY AIR TRAFFIC FACILITIES

DAILY NAS REPORTABLE AIRPORTS

AIRPORT NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque Intl Sunport, NM	817-222-5006	8:00 a.m.-5:00 p.m.	505-842-4366
Andrews AFB, MD	718-995-5426	8:00 a.m.-4:30 p.m.	301-735-2380
Baltimore/Washington Intl Thurgood Marshall, MD	718-995-5426	8:00 a.m.-4:30 p.m.	410-962-3555
Boston Logan Intl, MA	781-238-7001	7:30 a.m.-4:00 p.m.	617-455-3100
Bradley Intl, CT	617-238-7001	7:30 a.m.-4:00 p.m.	203-627-3428
Burbank/Bob Hope, CA	310-725-3300	7:00 a.m.-5:30 p.m.	818-567-4806
Charlotte Douglas Intl, NC	404-305-5180	8:00 a.m.-4:30 p.m.	704-344-6487
Chicago Midway, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-884-3670
Chicago O'Hare Intl, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-601-7600
Cleveland Hopkins Intl, OH	847-294-8400	8:00 a.m.-4:00 p.m.	216-898-2020
Covington/Cincinnati, OH	708-294-7401	8:00 a.m.-4:30 p.m.	606-767-1006
Dallas/Ft. Worth Intl, TX	817-222-5006	8:30 a.m.-5:00 p.m.	972-615-2531
Dayton Cox Intl, OH	847-294-8400	7:30 a.m.-4:00 p.m.	937-454-7300
Denver Intl, CO	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1600
Detroit Metro, MI	847-294-8400	8:00 a.m.-4:00 p.m.	734-955-5000
Fairbanks Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-474-0050
Fort Lauderdale Intl, FL	404-305-5180	7:00 a.m.-3:30 p.m.	305-356-7932
George Bush Intercontinental/Houston, TX	817-222-5006	7:30 a.m.-4:00 p.m.	713-230-8400
Hartsfield-Jackson Atlanta Intl, GA	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Honolulu Intl, HI	310-725-3300	7:30 a.m.-4:00 p.m.	808-840-6100
Houston Hobby, TX	817-222-5006	8:00 a.m.-5:00 p.m.	713-847-1400
Indianapolis Intl, IN	847-294-8400	8:00 a.m.-4:00 p.m.	317-484-6600
Kahului/Maui, HI	310-725-3300	7:30 a.m.-4:00 p.m.	808-877-0725
Kansas City Intl, MO	816-329-3000	7:30 a.m.-4:00 p.m.	816-329-2700
Las Vegas McCarran, NV	310-725-3300	7:30 a.m.-4:00 p.m.	702-262-5978
Los Angeles Intl, CA	310-725-3300	7:00 a.m.-3:30 p.m.	310-342-4900
Louis Armstrong New Orleans Intl, LA	817-222-5006	7:00 a.m.-4:30 p.m.	504-471-4300
Memphis Intl, TN	404-305-5180	7:30 a.m.-4:00 p.m.	901-322-3350
Miami Intl, FL	404-305-5180	7:00 a.m.-4:00 p.m.	305-869-5400
Minneapolis/St. Paul, MN	847-294-8400	8:00 a.m.-4:00 p.m.	612-713-4000
Nashville Intl, TN	404-305-5180	7:00 a.m.-3:30 p.m.	615-781-5460
New York Kennedy Intl, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-656-0335
New York La Guardia, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-335-5461
Newark Liberty Intl, NJ	718-995-5426	7:30 a.m.-4:00 p.m.	973-565-5000
Norman Y. Mineta San Jose Intl, CA	310-725-3300	7:30 a.m.-4:00 p.m.	408-982-0750
Ontario Intl, CA	310-725-3300	7:30 a.m.-4:00 p.m.	909-983-7518
Orlando Intl, FL	404-305-5180	7:30 a.m.-5:00 p.m.	407-850-7000
Philadelphia Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	215-492-4100
Phoenix Sky Harbor Intl, AZ	310-725-3300	7:30 a.m.-4:00 p.m.	602-379-4226
Pittsburgh Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	412-269-9237
Portland Intl, OR	425-227-1389	7:30 a.m.-4:00 p.m.	503-493-7500
Raleigh-Durham, NC	404-305-5180	8:00 a.m.-4:30 p.m.	919-840-5544
Ronald Reagan Washington National, DC	718-995-5426	8:00 a.m.-4:30 p.m.	703-413-1535
Salt Lake City, UT	425-227-1389	7:30 a.m.-4:00 p.m.	801-325-9600
San Antonio Intl, TX	817-222-5006	8:00 a.m.-4:30 p.m.	210-805-5507
San Diego Lindbergh Intl, CA	310-725-3300	8:00 a.m.-4:30 p.m.	619-299-0677
San Francisco Intl, CA	310-725-3300	7:00 a.m.-3:30 p.m.	650-876-2883
San Juan Intl, PR	404-305-5180	7:30 a.m.-5:00 p.m.	809-253-8663
Seattle-Tacoma Intl, WA	425-227-1389	7:30 a.m.-4:00 p.m.	206-214-4600
St. Louis Lambert, MO	816-329-3000	7:30 a.m.-4:00 p.m.	314-890-1000
Tampa Intl, FL	404-305-5180	7:30 a.m.-4:00 p.m.	813-371-7700
Ted Stevens Anchorage Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-271-2700
Teterboro, NJ	718-995-5426	8:00 a.m.-4:30 p.m.	201-288-1889
Washington Dulles Intl, DC	718-995-5426	8:00 a.m.-4:30 p.m.	571-323-6372
West Palm Beach, FL	404-305-5180	8:00 a.m.-4:30 p.m.	561-683-1867
Westchester Co, NY	718-995-5426	8:00 a.m.-4:30 p.m.	914-948-6520

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

Air Route Traffic Control Center frequencies and their remoted transmitter sites are listed below for the coverage of this volume. Bold face type indicates high altitude frequencies, light face type indicates low altitude frequencies. To insure unrestricted IFR operations within the high altitude enroute sectors, the use of 720 channel communications equipment (25 kHz channel spacing) is required.

® DENVER CENTER - 125.9
H-1-2-3-4-5-6, L-8-9-10-11-12-13-14-15

Casper - 135.6 **118.925**
 Cherokee - 132.1
 Cheyenne - **134.575 133.175** 132.1 125.9
 Laramie - 125.9
 Lusk - 135.6
 Medicine Bow - **133.175** 132.1 126.5
 Rock Springs - 128.5
 Sundance - 135.6 **133.675**

(KZDV)
® SALT LAKE CITY CENTER
H-1-2-3, L-9-11-12-13-14

Ashton - **132.4 128.35** 128.35
 Baker - 128.05
 Big Piney - **128.35** 128.35
 Billings - **127.75** 127.75
 Blackfoot - **128.35** 128.35
 Bliss - 128.55 **121.15** 118.05
 Boise - 118.05
 Boysen - **133.25** 133.25
 Bozeman - **132.4** 132.4
 Burley - 118.05
 Butte - 133.4 **132.4** 132.4
 Cascade - **121.15**
 Francis Peak - 127.7
 Glasgow - **126.85** 126.85
 Great Falls - 133.4 **119.75**
 Green River - **124.35** 124.35
 Jackson - **133.25** 133.25
 Judith Mountain - 133.4 **126.85** 126.85
 Lakeside - 133.4 **119.75**
 Lovell - **133.25** 133.25
 Malad City - 133.8 127.7 **125.925**
 Miles City - **126.85** 126.85
 Miller Peak - 133.4 **119.75** 119.75
 Ontario - 128.05
 Rome - 128.05 **121.15**
 Salmon - **132.4** 132.4
 Sheridan - **127.75** 127.75
 Squaw Butte - 128.05 **121.15**

(KZLC)
® SEATTLE CENTER
H-1-3, L-1-2-11-13

Antelope Mountain - 124.85
 Arcata - **124.85**
 Badger Mountain - **127.05** 127.05 **134.95** 134.95
 Beacon Hill - **127.05** 127.05 **120.3** 120.3
 Cottonwood - 123.95 **118.55**
 Dallesport - **126.6** 126.6
 Fort Lawton - **127.05** 127.05
 Hoquiam - **128.3**
 Horton - **132.075** 125.8 121.4
 Kimberly - **135.45**
 Klamath Falls - **134.9** 127.6
 Lakeside - 123.95
 Lakeview - **135.35** 127.6
 Larch Mountain - **128.3** 128.3 **126.6** 126.6
 Marlin - 126.1
 Medford - **135.15** 124.85 121.4
 Mohler - **128.45**
 Mullan Pass - **128.45**
 Nassel - 124.2
 Neah Bay - **125.1** 125.1
 Redmond - **121.35 134.9 135.35** 128.15
 Rex-Parrett - **121.35**
 Scappoose - 124.2 128.15
 Spokane - 123.95 119.225
 Stampede Pass - **134.95** 134.95
 The Dalles - **135.45** 119.65
 Wallula - 132.6
 Wenatchee - 126.1
 Whidbey Island - **134.95** 134.95 128.5 **125.1** 125.1
 Yakima - **135.525** 135.525 132.6 **120.3** 120.3 **118.55**

(KZSE)

VHF frequencies available at Flight Service Stations and at their remote communication outlets (RCO's) are listed below for the coverage of this volume. Frequencies in bold type are available all altitudes but recommended for use FL180 and above. "T" indicates transmit only and "R" indicates receive only. RCO's available at NAVAID's are listed after the NAVAID name. RCO's not at NAVAID's are listed by name.

BOISE AFSS

ASHTON RCO 123.625
BLISS RCO 122.4
BOISE RCO 122.2 122.6
CASCADE RCO 122.35
CONNERS RCO 122.05
COEUR D'ALENE RCO 122.05
HAILEY RCO 122.4
IDAHO FALLS RCO 122.55
LEWISTON RCO 122.35
MALAD CITY RCO 122.65
MOUNTAIN HOME RCO 122.6
MULLAN PASS RCO 122.15
POCATELLO RCO 122.35
ROME RCO 122.65
SALMON RCO 122.55
SQUAW BUTTE RCO 122.45
STANLEY RCO 122.6
TWIN FALLS RCO 122.25

CASPER AFSS

ANTELOPE GAP RCO 122.2
BIG PINEY RCO 122.3
BOYSEN RESERVOIR RCO 122.3
CASPER RCO 122.2 122.4
CHEROKEE RCO 122.4
CHEYENNE RCO 122.3
CODY RCO 122.3
CONVERSE RCO 121.975
CRAZY WOMAN RCO 122.025
DUNIOR RCO 122.6
FORT BRIDGER RCO 122.3
GILLETTE RCO 122.3
JACKSON RCO 122.05
LARAMIE RCO 122.6
MEDICINE BOW RCO 122.5
NEWCASTLE RCO 122.5
RAWLINS RCO 122.2
RIVERTON RCO 122.2
ROCK SPRINGS RCO 122.6
SHERIDAN RCO 122.5
WORLAND RCO 122.4

GREAT FALLS AFSS

BILLINGS RCO 122.55
BOZEMAN RCO 122.5
BUTTE RCO 122.2 122.4
COPPERTOWN RCO 122.65
CUT BANK RCO 122.2
DILLON RCO 122.15
DRUMMOND RCO 122.25
GLASGOW RCO 122.25
GLEN DIVE RCO 122.55
GREAT FALLS RCO 122.6
HARLOWTON RCO 122.4
HAVRE RCO 123.65
HELENA RCO 122.55
JUDITH MOUNTAIN RCO 122.2
LAKESIDE RCO 122.5
LEWISTOWN RCO 122.35
LIVINGSTON RCO 122.2
MILES CITY RCO 122.2
MILLER PEAK RCO 122.45
SIDNEY RCO 123.65
TOWER HILL RCO 122.3
WOLF POINT RCO 122.45
YELLOWSTONE RCO **119.4**

Mc MINNVILLE AFSS

ASTORIA RCO 122.3
AUGSPURGER RCO 122.3
BEAVER MOUNTAIN RCO **122.4**
BURNS RCO 122.5
CAPE BLANCO RCO 122.4
ENTERPRISE RCO 122.5
EUGENE RCO **122.3**
KIMBERLY RCO 122.6
KLAMATH FALLS RCO 122.6
LA GRANDE RCO 122.5
LAKEVIEW RCO 122.3
MC MINNVILLE RCO 122.45
MEDFORD RCO 122.65
NEWBERG RCO 122.45
NEWPORT RCO 122.5
NORTH BEND RCO 122.4
ONTARIO RCO 122.3
PENDLETON RCO 122.2
PORTLAND RCO 122.6
REDMOND RCO 122.5
ROSEBURG RCO 122.55
SALEM RCO 122.6
SEXTON SUMMIT RCO 122.5
SUNRIVER RCO 122.3
WALLULA RCO 122.6

SEATTLE AFSS 122.5
BADGER MOUNTAIN RCO 122.3
BELLINGHAM RCO 122.15
BUCKHORN MTN RCO 122.2
ELLENSBURG RCO 122.2
EPHRATA RCO 122.2
HOQUIAM RCO 122.2
JUMP-OFF-JOE RCO 122.4
MOSES LAKE RCO 122.4
MT CONSTITUTION RCO 122.3
OCEAN SHORES RCO 122.4
OMAK RCO 122.2
PAINE RCO 122.55
PORT ANGELES RCO 122.6
PULLMAN RCO 122.6
SEATTLE RCO 122.5 123.65
SOUTHWEST WASHINGTON RCO 122.25 122.55
SPOKANE RCO 122.2 122.55 122.65
TATOOSH RCO 122.25
THE DALLES RCO 122.65
VANCOUVER RCO 122.35
WALLA WALLA RCO 122.3
WENATCHEE RCO 122.6
YAKIMA RCO 122.5

FLIGHT STANDARDS DISTRICT OFFICES (FSDO)

Below is a list of FSDO's in the area of coverage of this directory. These offices serve the aviation industry and the general public on matters relating to certification and operation of general aviation aircraft. Address letters to Manager, Flight Standards District Office—Federal Aviation Administration.

IDAHO

3295 Elder Street, Suite 350
Airport Plaza
Boise, ID 83705
Telephone: 208-334-1238

MONTANA

Helena Airport
2725 Skyway Drive
Helena, MT 59601
Telephone: 406-449-5270
1-800-457-9917

OREGON

Portland Flight Standards District Office
3180 NW 229th Avenue
Hillsboro, Oregon 97124
Telephone: 503-615-3200
FAX 503-615-3300

WASHINGTON

Seattle FSDO
1601 Lind Ave. S. W.
Renton, WA 98057
Telephone: 425-227-2813

Spokane FSDO
Felts Field
6133 E. Rutter Avenue
Spokane, WA 99212
Telephone: 509-532-2340

PREFERRED IFR ROUTES

A system of preferred routes has been established to guide pilots in planning their route of flight, to minimize route changes during the operational phase of flight, and to aid in the efficient orderly management of the air traffic using federal airways. The preferred IFR routes which follow are designed to serve the needs of airspace users and to provide for a systematic flow of air traffic in the major terminal and en route flight environments. Cooperation by all pilots in filing preferred routes will result in fewer traffic delays and will better provide for efficient departure, en route and arrival air traffic service.

The following lists contain preferred IFR routes for the low altitude stratum and the high altitude stratum. The high altitude list is in two sections; the first section showing terminal to terminal routes and the second section showing single direction route segments. Also, on some high altitude routes low altitude airways are included as transition routes.

The following will explain the terms/abbreviations used in the listing:

1. Preferred routes beginning/ending with an airway number indicate that the airway essentially overlies the airport and flight are normally cleared directly on the airway.
2. Preferred IFR routes beginning/ending with a fix indicate that aircraft may be routed to/from these fixes via a Standard Instrument Departure (SID) route, radar vectors (RV), or a Standard Terminal Arrival Route (STAR).
3. Preferred IFR routes for major terminals selected are listed alphabetically under the name of the departure airport. Where several airports are in proximity they are listed under the principal airport and categorized as a metropolitan area; e.g., New York Metro Area.
4. Preferred IFR routes used in one direction only for selected segments, irrespective of point of departure or destination, are listed numerically showing the segment fixes and the direction and times effective.
5. Where more than one route is listed the routes have equal priority for use.
6. Official location identifiers are used in the route description for VOR/VORTAC nav aids.
7. Intersection names are spelled out.
8. Nav aid radial and distance fixes (e.g., ARD201113) have been used in the route description in an expediency and intersection names will be assigned as soon as routine processing can be accomplished. Nav aid radial (no distance stated) may be used to describe a route to intercept a specified airway (e.g., MIV MIV101 V39); another nav aid radial (e.g., UIM UIM255 GSW081); or an intersection (e.g., GSW081 FITCH).
9. Where two nav aids, an intersection and a nav aid, a nav aid and a nav aid radial and distance point, or any navigable combination of these route descriptions follow in succession, the route is direct.
10. The effective times for the routes are in UTC. During periods of daylight saving time effective times will be one hour earlier than indicated. All states observe daylight saving time except Arizona, Puerto Rico and the Virgin Islands. Pilots planning flight between the terminals or route segments listed should file for the appropriate preferred IFR route.
11. (90–170 incl) altitude flight level assignment in hundred of feet.
12. The notations “pressurized” and “unpressurized” for certain low altitude preferred routes to Kennedy Airport indicate the preferred route based on aircraft performance.
13. High Altitude Preferred IFR Routes are in effect during the following time periods unless otherwise noted.
Sun 1300–2259 local time.
Mon thru Fri 0701–2259 local time.
Sat 0701–1459 local time.
14. Use current SIDs and STARs for flight planning.
15. For high altitude routes, the portion of the routes contained in brackets [] is suggested but optional. The portion of the route outside the brackets will likely be required by the facilities involved.

SPECIAL LOW ALTITUDE DIRECTIONAL ROUTES

Route		Effective Times (UTC)
Low altitude IFR traffic 13000 feet and below overflying the Portland, OR Area:		
Southbound/southwestbound.....	OLM V165 UBG.....	1400–0700
Northbound	UBG V165 OLM.....	1400–0700
Low Altitude IFR traffic 9000 feet and below overflying the Seattle, WA Area:		
Southbound/Southwestbound	V165	1400–0700
Northbound	V023 V165 DIGGN V495	1400–0700
Eastbound	V004 SEA V002	1400–0700
Low Altitude IFR traffic 10000 to 15000 overflying the Seattle, WA Area:		
Southbound	V165 V495	1400–0700
Southbound	V023 V165 DIGGN V495	1400–0700
Eastbound	V004 SEA V2	1400–0700
Low Altitude IFR traffic 10000 to 15000 overflying the Seattle, WA Area landing in PDX area:		
Southbound	V165 V495 SEA HELNS–STAR	1400–0700
Southbound	V023 V165 DIGGN V495 SEA HELNS–STAR.....	1400–0700
Low Altitude IFR traffic from the North terminating at McMinnville, OR, Aurora State, OR, or Hillsboro, OR:		
Southbound	V165 UBG	1400–0700

SPECIAL LOW ALTITUDE DIRECTIONAL ROUTES

Terminals	Route	Effective Times (UTC)
From the Eugene, OR Area: (props and turboprops, 170 and below)		
Northbound	V481 CVO V495 UBG.....	1400-0700
Southbound	V448 OED	1400-0700

HIGH ALTITUDE

Terminals	Route	Effective Times (UTC)
PORTLAND (PDX)		
Burbank (BUR)	J67 LIN J189 AVE FIM.....	1300-0600
Chicago O'Hare (ORD).....	J16 MCW JVL-STAR.....	0000-2359
Detroit Metro-Wayne Co (DTW)	ODI J34 BAE MKG POLAR-STAR	
Houston (HOU).....	(Turbojets-non-advanced NAV only) PNH MQP ELLVR TEXXN-STAR	
	or (Turbojets-GPS or DME/DME-IRU equipped) PNH MQP ELLVR COACH (RNAV)-STAR.....	
Houston (IAH).....	(Non-advanced NAV only) PNH MQP RIICE-STAR ..	
	or (GPS or DME/DME/IRU-equipped) PNH MQP BAZBL (RNAV)-STAR	
Long Beach (LGB).....	J67 LIN J189 AVE FIM.....	1300-0600
Los Angeles (LAX)	J67 LIN J189 AVE FIM.....	1300-0600
Ontario (ONT).....	J67 LKV J5 EHF PMD	1300-0600
Santa Ana (SNA)	J67 LIN J189 AVE FIM.....	1300-0600
SEATTLE BOEING FLD (BFI)		
Burbank (BUR)	SEA J5 LKV J67 LIN J189 AVE FIM.....	1300-0600
Long Beach (LGB).....	SEA J5 LKV J67 LIN J189 AVE FIM.....	1300-0600
Los Angeles (LAX)	SEA J5 LKV J67 LIN J189 AVE FIM.....	1300-0600
Ontario (ONT).....	SEA J5 EHF ZIGGY-STAR	1300-0600
Santa Ana (SNA)	SEA J5 LKV J67 LIN J189 AVE FIM.....	1300-0600
SEATTLE/TACOMA (SEA)		
Anchorage (ANC)	(RNAV only) SQUIM AKWAY AKHOG LAIRE AKZOO JOH	
Burbank (BUR)	SUMMA-DP SUMMA J5 LKV J67 LIN J189 AVE FIM	1300-0600
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR).....	BAE J34 GRR HIMEZ-STAR	
Detroit Metro-Wayne Co. (DTW)	J90 HLN J34 BAE MKG POLAR-STAR	
Houston (HOU).....	(Turbojets-non-advanced NAV only) PNH MQP ELLVR TEXXN-STAR	
	or (Turbojets-GPS or DME/DME-IRU equipped) PNH MQP ELLVR COACH (RNAV)-STAR.....	
Houston (IAH).....	(Non-advanced NAV only) PNH MQP RIICE-STAR .	
	or (GPS or DME/DME/IRU-equipped) PNH MQP BAZBL (RNAV)-STAR	
Kennedy (JFK).....	J90 HLN J34 ODI J30 J90 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	
Long Beach (LGB).....	SUMMA-DP SUMMA J5 LKV J67 LIN J189 AVE FIM	1300-0600
Los Angeles (LAX)	SUMMA-DP SUMMA J5 LKV J67 LIN J189 AVE FIM	1300-0600
Newark (EWR).....	J90 ABR J70 GEP DLL J34 CRL J584 SLT FQM-STAR	
Ontario (ONT).....	SUMMA-DP SUMMA J5 EHF PMD	1300-0600
Santa Ana (SNA)	SUMMA-DP SUMMA J5 LKV J67 LIN J189 AVE FIM	1300-0600
SPOKANE (GEG)		
Chicago O'Hare (ORD).....	(FL240 and above, Turbojets) to join DPR J16 MCW JVL-STAR.....	0000-2359

Q-ROUTES REGULATORY

Q1, Q3, Q5, Q7, Q9 and Q11 are preferred single direction (Southbound) Q routes; flight planning Northbound not authorized.

Q routes are RNAV routes that require the use of GNSS or DME/DME/IRU RNAV, unless otherwise indicated. Please note that this section does not apply to Q routes in the Gulf of Mexico. Gulf of Mexico Q routes are explained in the Southeast and South Central A/FD volumes. Q routes listed in this A/FD volume have at least part of one of their leg segments within this volume's area of coverage.

GNSS and DME/DME/IRU RNAV operations are authorized along Q routes at FL 180 and above. GNSS and DME/DME/IRU RNAV MEAs will only be published if above FL 180.

DME facilities that have been assessed for RNAV operations are listed below. Q routes with no DME facilities listed are limited to GNSS RNAV operations only. Those routes will have an enroute chart note "GNSS REQUIRED".

Route	Segment	DME
Q1	ELMAA-ERAVE	BTG, OLM, HQM, HUH, UBG
	ERAVE-EASON	BTG, OLM, HQM, HUH, LTJ, CVO, DSD, OED, UBG, ONP, EUG
	EASON-EBINY	CVO, DSD, OED, BTG, UBG, ONP, EUG, LMT
	EBINY-ENVIE	CVO, OED, EUG, LMT, RBL, ENI, ONP, FJS
	ENVIE-ETCHY	OED, PYE, OAK, LIN, ECA, LMT, RBL, ENI, SAC, FJS
	ETCHY-POINT REYES	LIN, ECA, RBL, ENI, SAC, OAK
Q2	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-HOBOL	BZA, GBN, BLH, EED, PXR, IPL, TFD, DRK, TUS
	HOBOL-ITUCO	TFD, GBN, BLH, PXR, TUS, CIE, SSO
	ITUCO-NEWMAN	EWM, TFD, PXR, CIE, SSO, TUS, TCS
Q3	FEPOT-FAMUK	OLM, TOU, HQM, CVO, BTG, DSD, LTJ, UBG, ONP, EUG
	FAMUK-FRFLY	BTG, DSD, OED, CVO, EUG, ONP, UBG, RBL, LMT
	FRFLY-FINER	OED, EUG, RBL, LMT, ENI, CVO, FJS
	FINER-FOWND	OED, PYE, ECA, LIN, OAK, ENI, RBL, LMT, SAC, FJS
Q4	FOWND-POINT REYES	LIN, ECA, PYE, RBL, SAC, ENI
	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-SCOLE	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SCOLE-SPTFR	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SPTFR-ZEBOL	EED, IPL, BZA, GBN, TFD, PXR, BLH
	ZEBOL-SKTR	PXR, BLH, BZA, GBN, TFD, TUS, SSO, CIE, SVC, TCS
Q5	SKTR-EL PASO	EWM, CUS, SVC, TCS, SSO, CIE, ELP, DMN, CME
	HAROB-HISKU	OLM, ONP, CVO, EUG, HQM, UBG, BTG, LTJ, DSD, HUH
	HISKU-HARPR	ONP, CVO, EUG, LTJ, DSD, UBG, BTG, RBL, OED, LMT, FJS, LKV
	HARPR-HOMEG	CVO, EUG, OED, RBL, LMT, ENI, FJS, LKV
Q7	HOMEG-HUPTU	SAC, PYE, LIN, OAK, ECA, LMT, RBL, ENI, OED, FJS
	HUPTU-STIKM	OAK, ECA, PYE, LIN, SAC, ENI, RBL
	JINMO-JOGEN	CVO, HQM, LTJ, UBG, BTG, ONP, IMB, EUG, OLM, DSD, YKM, PDT, SEA
	JOGEN-JUNEJ	LTJ, IMB, UBG, EUG, CVO, RBL, LMT, FMG, DSD, LKV, OED, BTG
Q9	JUNEJ-JAGWA	RBL, LMT, FMG, LIN, SAC, ECA, ENI, MOD, SWR, OAK, LKV, CZQ, AVE, SNS
	JAGWA-AVENAL	OAK, MOD, ECA, EHF, PRB, AVE, SNS, CZQ
	SUMMA-SMIGE	OLM, UBG, SEA, YKM, BTG, ONP, IMB, HQM, PDT, EUG, LTJ, CVO, DSD, OED, EPH, MWH
	SMIGE-SUNBE	IMB, UBG, EUG, IMB, RBL, LMT, FMG, SAC, OED, CVO, LKV, DSD, BTG
Q11	SUNBE-REBRG	RBL, LMT, FMG, SAC, ECA, MVA, CZQ, OAK, EHF, PMD, LKV, LIN, MOD, AVE, OED, SWR
	REBRG-DERBB	CZQ, PMD, EHF, LAX, RZS, AVE, MOD, ECA
	PAAGE-PAWLI	EPH, UBG, CVO, EUG, HQM, YKM, OLM, PDT, BTG, ONP, IMB, LTJ, DSD, LKV, OED, SEA
	PAWLI-PITVE	EUG, FMG, SAC, IMB, LKV, OED, DSD, RBL, LMT, CVO, REO
Q13	PITVE-PUSHH	FMG, SAC, LIN, SWR, MOD, OAL, RBL, LKV, LMT, MVA, CZQ
	PUSHH-LOS ANGELES	SAC, ECA, FMG, LIN, OAL, MOD, EHF, LAX, PMD, PDZ, HEC, OCN, CZQ, AVE, RZS
	All segments	None; GNSS required
	All segments	None; GNSS required
Q15	PLESS-NASHVILLE	ENL, GQO, PXV, BNA, IIU, FAM, BWG, CSX
Q19	CORONA-HONDS	CNX, ABQ, ACH, ONM, TXO, LVS, TCC, CME
Q20	HONDS-UNNOS	CNX, INK, CME, TXO, TCC
	UNNOS-FUSCO	FST, ACH, INK, CME, SJT, TXO, TCC
	FUSCO-JUNCTION	ABI, CWK, CSI, INK, LZZ, JCT, SJT, STV, FST
	JONEZ-RAZORBACK	BYP, EOS, TUL, TXK, ADM, RZC, OKM
Q21	GUSTI-OYSTY	AEX, DAS, MCB, LLA, BTR, LCH, HRV, LFT, LEV
Q22	OYSTY-ACMES	RQR, GCV, MCB, BTR, PCU, GPT, HRV, LEV, SJI
	ACMES-CATLN	SJI, MGM, MCB, BFM, GPT, GCV, HRV, CEW, MVC, PCU, MEI
Q23	FORT SMITH-RAZORBACK	OKM, RZC, EOS, TUL

Route	Segment	DME
Q24	LAKE CHARLES–BATON ROUGE	AEX, DAS, LCH, MCB, LFT, BTR
	BATON ROUGE–IRUBE	AEX, LEV, MCB, LCH, RQR, HRV, BTR, GCV, MCB, PCU, SJI, LBY
	IRUBE–PAYTN	GCV, MCB, JYU, PCU, MEI, HRV, CEW, SJI
Q25	MEEOW–WALNUT RIDGE	ELD, MEM, LIT, FAM, RZC
	WALNUT RIDGE–WLSUN	MEM, STL, BWG, PXV, ENL, FAM, ARG, BNA, CSX, TTH
	WLSUN–POCKET CITY	BWG, PXV, ENL, BNA, TTH
Q26	WALNUT RIDGE–DEVAC	LIT, JKS, GQO, MEM, BNA, FAM, ARG, DYR, VUZ, RMG
Q27	FORT SMITH–ZALDA	OKM, SGF, RZC, EOS, TUL
Q28	GRAZN–PYRMD	EIC, LIT, ELD, OKM, TXK
	PYRMD–HAKAT	ARG, LIT, FAM, ELD, SGF, RZC, MEM, TXK
	HAKAT–ESTEE	ARG, LIT, FAM, SGF, MEM
	ESTEE–POCKET CITY	ARG, CSX, FAM, PXV, ENL, MEM, STL, BWG, TTH, BNA
Q29	HARES–MEMPHIS	MEM, ARG, LIT, JAN, ELD, SQS
	MEMPHIS–SIDAE	MEM, PXV, BNA, BWG, ARG, ENL
	SIDAE–POCKET CITY	PXV, TTH, BWG, ENL
Q30	SIDON–VULCAN	GLH, MEM, VUZ, JAN, JYU, MEI, MGM, SQS, RMG
Q31	DHART–JODOX	SQS, LIT, TXK
	JODOX–MARVELL	SQS, LIT, ELD, MEM, ARG
	MARVELL–TIIDE	ARG, BWG, PXV, FAM, LIT, MEM, ENL, TTH
	TIIDE–POCKET CITY	BWG, PXV, ENL, TTH
Q32	EL DORADO–GAGLE	AEX, JAN, MEM, SQS, SWB, ELD, LIT, TXK
	GAGLE–CRAMM	JAN, SQS, MEM, ARG, VUZ, BNA, LIT
	CRAMM–NASHVILLE	BWG, MEM, VUZ, BNA, GQO
	NASHVILLE–SWAPP	BWG, IIU, PXV, VXV, BNA, GQO
Q33	DHART–LITTLE ROCK	AEX, ELD, LIT, TXK, SWB, ARG, MEM, SQS
	LITTLE ROCK–PROWL	ELD, SGF, FAM, LIT, ARG, MEM, RZC, CSX, STL
Q34	TEXARKANA–MATIE	LIT, SWB, TXK, BYP, EIC, ELD, SQS
	MATIE–MEMPHIS	LIT, ARG, MEM, ELD, SQS
	MEMPHIS–SWAPP	BWG, ARG, MEM, MKL, SQS, PXV, BNA, GQO, IIU, VXV
Q35	KIMBERLY–NEERO	LTJ, PDT, DSD, IMB, LKV, BOI, REO, BAM, SDO
	NEERO–WINEN	BQU, SDO, BAM, REO, BVL, ILC, DTA, ELY, CDC, MLF, BCE
	WINEN–CORKR	CDC, BCE, BLD, ILC, MLF, TBC, PGS, INW, DRK
	CORKR–DRAKE	TBC, BCE, BLD, DRK, PGS, FLG, GCN, INW, TFD
Q36	RAZORBACK–TWITS	RZC, MEM, SGF, BUM, TUL, EOS, FAM, ARG, LIT
	TWITS–DEPEC	MEM, GQO, BNA, BWG, FAM, ARG, PXV, IIU
	DEPEC–NASHVILLE	GQO, BWG, BNA, PXV, IIU
	NASHVILLE–SWAPP	VXV, BWG, BNA, GQO, PXV, IIU
Q38	ROKIT–INCIN	DAS, LCH, SWB, IAH, LFK, HUB, AEX
	INCIN–LAREY	JAN, MCB, SWB, AEX
	LAREY–BESOM	JAN, JYU, MEI, SQS, VUZ
Q40	ALEXANDRIA–DOOMS	AEX, SWB, LCH, JAN, HEZ, MCB
	DOOMS–WINAP	JAN, SQS, MEI, MCB
	WINAP–MISLE	MEI, VUZ, JYU
Q42	KIRKSVILLE–STRUK	CID, IOW, UIN, LMN, IRK, BDF, STL, DEC, ENL, CSX
	STRUK–DANVILLE	ENL, IOW, UIN, BDF, DEC, STL, CSX, SPI, TTH, BVT, JOT, VHP, OXI, ENL, OKK, OBK, GIJ, FWA, GSH, IRK
	DANVILLE–MUNCIE	GIJ, SPI, BDF, OBK, OKK, VHP, BVT, DEC, GSH, FWA, JOT, TTH, OXI, ROD, FLM
	MUNCIE–HIDON	FLM, VHP, GSH, TTH, GIJ, OKK, FWA, ROD, OXI, CRL, GSH, APE, DJB, DXO, HNN
		AIR, HVQ, CXR, EWC
	HIDON–BUBAA	AIR, APE, HNN, CXR, HVQ, EWC, DJB
	BUBAA–PSYKO	AIR, APE, DJB, CXR, HNN, EWC, SLT, CSN, JHW, ETG, PSB
	PSYKO–BRNAN	PSB, JHW, EWC, AIR, ETG, CSN, EMI, SLT
	BRNAN–MAALS	EMI, SLT, CSN, EWC, PSB, ETG, SAX, RBV, HNK, HUO, SIE
	MAALS–SUZIE	ETG, EMI, CSN, HUO, SIE, JFK, PSB, SLT, HNK
	SUZIE–EAST TEXAS	JFK, EMI, PSB, SLT, HNK, SIE, RBV, SAX, HUO, CYN
	EAST TEXAS–ELIOT	HUO, RBV, EMI, CYN, SAX, JFK, PSB, HNK
Q104	DEFUN–HEVVN	PIE, PZD, CRG, SZW, TAY, JYU, CEW, MGM, OTK, CRG
	HEVVN–PLYER	PIE, ORL, OMN, SRQ, TAY, LAL, CRG, SZW, PZD
	PLYER–SWABE	PIE, ORL, OMN, SRQ, TAY
	SWABE–ST PETERSBURG	LAL, ORL, OMN, SRQ, PHK, PIE
	ST PETERSBURG–CYPRESS	PHK, PBI, SRQ, PIE, VRB, ORL, FLL, LAL, OMN

Route	Segment	DME
Q106	SMELZ-BULZI	LAL, ORL, OMN, PHK, PIE, CRG, VRB, TAY, OTK, PZD, AMG, SZW
	BULZI-DRABK	AMG, PZD, TAY, CRG, SZW, MGM, OTK, JYU, CEW, SJI
	DRABK-GADAY	MGM, PZD, OTK, JYU, SZW, CEW, SJI
Q108	GADAY-HKUNA	CEW, JYU, MGM, SZW, RRS, PZD, MAI, OTK, GEF, MGR, TAY, AMG, CRG
Q110	THNDR-JAYMC	SRQ, VRB, PHK, PIE, LAL, VKZ, ORL, PBI
	JAYMC-RVERO	VKZ, VRB, PHK, PIE, LAL, SRQ, ORL, OMN, PBI, DHP
	RVERO-KPASA	OMN, PIE, PBI, SRQ, ORL, LAL
	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
Q112	BRUTS-GULFR	OMN, AMG, CRG, SZW, PIE, TAY, PZD, OTK
	GULFR-FEONA	TAY, MCN, PZD, CRG, OTK, SZW, AMG, MCN, ATL, MGM
	DEFUN-HEVVN	PIE, OTK, CRG, OMN, LAL, SZW, SRQ, ORL, VRB
	HEVVN-INPIN	JYU, PZD, CEW, SZW, MGM, OTK, TAY, AMG, PIE, CRG
Q116	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS-GULFR	OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK
	GULFR-CEEYA	MCN, AMG, PZD, OTK, SZW, TAY
Q118	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS-LENIE	OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK, MCN
Q501	VIXIS-GOPHER	ECK, FNT, APN, SSM, GRR, MBL, SAW, BAE, MNM, DLL, AUW, ODI, STE, FGT, EAU, DLH, GEP, BRD, MCW, MSP, ASP, TVC, GRB, RWF
	GOPHER-SOBME	FGT, BRD, MCW, GEP, ABR, FAR, DLH, ODI, RWF, FSD
	KENPA-GOPHER	SSM, FNT, ECK, APN, SAW, GRB, BAE, DLL, AUW, ODI, FGT, DLH, EAU, MCW, MSP, MNM, ASP, TVC, GEP, RWF, BRD
Q504	GOPHER-SOBME	FGT, DLH, ODI, MCW, ABR, FAR, MSP, GEP, RWF, FSD, BRD
	NOTAP-CESNA	SSM, ECK, APN, GLR, PLN, ISQ, MNM, DLL, RHI, DLH, GEP, FGT, ODI, ASP, TVC, SAW, GRB, BRD
Q505	CESNA-HEMDI	ODI, GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, DLL, BRD
	OMAGA-RIMBE	SSM, TVC, ASP, SAW, GRB
	RIMBE-CESNA	SSM, RHI, DLL, DLH, GEP, FGT, TVC, SAW, GRB, BRD, ODI
	CESNA-HEMDI	GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, BRD, ODI, GRB

RNAV Routing Pitch and Catch Points

The purpose of this section of the Special High Altitude Routes is to present user routing options for flight within the initial HAR Phase I expansion airspace. Users are able to fly user-preferred routes, referred to as non-restrictive routing (NRR), between specific fixes described by **pitch** (entry into) and **catch** (exit out of) fixes in the HAR airspace. Pitch points indicate an end of departure procedures, preferred IFR routings, or other established routing programs where a flight can begin a segment of NRR. The catch point indicates where a flight ends a segment of NRR and joins published arrival procedures, preferred IFR routing, or other established routing programs.

The HAR Phase I expansion airspace is defined as that airspace at and above FL 350 in fourteen of the western and southern Air Route Traffic Control Centers (ARTCCs). The airspace includes Minneapolis (ZMP), Chicago (ZAU), Kansas City (ZKC), Denver (ZDV), Salt Lake City (ZLC), Oakland (ZOA), Seattle Centers (ZSE), Los Angeles (ZLA), Albuquerque (ZAB), Fort Worth (ZFW), Memphis (ZME), and Houston (ZHU). Jacksonville (ZJX) and Miami (ZMA) are included for east-west routes only.

To develop a flight plan, select pitch and catch points based upon your desired route across the Phase I airspace. Filing requirements to pitch points, and from catch points, remain unchanged from current procedures. For the portion of the route between the pitch and catch points, non-restrictive routing is permitted.

Where pitch points for a specific airport are not identified, aircraft should file an appropriate departure procedure (DP), or any other user preferred routing prior to the NRR portion of their routing. Where catch points for a specific airport are not identified aircraft should file, after the NRR portion of their routing, an appropriate arrival procedure or other user preferred routing to their destination.

Additionally, information concerning the location and schedule of Special Use Airspace (SUA) and Air Traffic Control Assigned Airspace (ATCAA) can be found on the Web Site: <http://sua.faa.gov/sua/Welcome.do>. ATCAA refers to airspace in the high altitude structure supporting military and other special operations. Users are encouraged to file around these areas when they are scheduled to be active, thereby avoiding unplanned reroutes around them.

In conjunction with the HAR program RNAV routes have been established to provide for a systematic flow of air traffic in specific portions of the enroute flight environment. The designator for these RNAV routes begin with the letter Q, for example, Q-501. Where those routes aid in the efficient orderly management of air traffic they will be published as preferred IFR routes.

HAR Special High Altitude Pitch (entry) Points for Nonrestrictive Routing for Airports Located Outside HAR Phase I Expansion Airspace

Westbound traffic originating outside of HAR airspace entering ZMP, ZAU, ZKC and ZME can begin non-restrictive routing over any of the following pitch points (listed from north to south):

DLH, CESNA, GEP, BAE, MKG, GRR, PMM, GSH, CADIZ, FWA, VHP, FLM, IIU, PXV, SGF, RZC, BNA, SALMS, VUZ, BOYDD, MIE.

Traffic originating outside of HAR airspace may also begin Nonrestrictive Routing upon crossing the pitch line depicted on the associated graphic.

HAR Special High Altitude Pitch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists pitch points for airports within the HAR Phase I expansion airspace.

Albuquerque	ABQ, GUP, HANOS or ZUN
Austin	ABI, FUZ, JCT, MQP, NAVYS, SJT or TNV
Boca Raton, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Burbank includes Santa Monica and Van Nuys	GMN, MARKS or DAG LAS or HEC EED or PMD BLH
Chicago Terminal Area	IOW, PLL275065, MZV or BAE
Dallas/Fort Worth Terminal Area	ABI, LBB, GTH, CDS, MRMAC, IRW, TUL, MLC, TXK ELD, SWB or Aircraft destined the Chicago terminal area Except MDW EAKER MIDEE BDF BRADFORD-STAR Or MLC J105 SGF BDF BRADFORD-STAR
Denver Terminal Area	PUB, DVC, DBL, RLG, EKR, LAR, MBW, CYS, BFF, HANKI, NATTI, ASHBY, BELKE, CABET, WEEDS, OR BINKE
Fort Lauderdale (or) Fort Lauderdale Executive	THNDR KPASA Q118 LENIE or THNDR KPASA Q116 CEEYA or THNDR KPASA Q110 FEONA or THNDR SMELZ Q106 GADAY or THNDR SMELZ Q106 BULZI
Houston Bush	LIT, ELD, MLC, JCT or Aircraft destined Atlanta Terminal Area LCH Q24 PAYTN HONIE-RNAV STAR or Aircraft joining J37 to the northeast, GUSTI SID GUSTI Q22 CATLN or Aircraft joining J42 to the northeast, EL DORADO SID ELD Q32 J42

Houston Hobby	LIT, ELD, MLC, JCT, or Aircraft joining J42 to the northeast, EL DORADO SID ELD Q32 J42
Jacksonville, FL	TAY
Kansas City Terminal Area	TIFTO, CATTS or KENTN
Los Angeles, includes Ontario	GMN, RZS or DAG LAS or TRM EED or TRM PKE
Las Vegas	DOBNE, MOSBI, NICLE, TRALR or ZELOT
Long Beach includes Orange County	GMN SNS, EHF, LANDO or TRM PKE or TRM EED
Memphis	BNA, HAAWK, SALMS or SQS
Miami Terminal Area	WINCO KPASA Q118 LENIE or WINCO KPASA Q116 CEEYA or WINCO KPASA Q110 FEONA or WINCO SMELZ Q106 GADAY or WINCO SMELZ Q106 BULZI
Milwaukee	GREAS
Minneapolis Terminal Area*	ONL, ABR, FAR, OBH, OVR, FOD
New Orleans Terminal Area	AEX, MEI, SQS, KAPLN
Orlando Terminal Area	WEBBS BRUTS Q118 LENIE or WEBBS GULFR Q116 CEEYA or WEBBS BULZI Q106 GADAY or WEBBS FEONA or WEBBS BULZI
Palm Beach, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Palm Springs	TRM JOTNU BLD or TRM EED or TRM PKE
Phoenix	CHILY, CIE, CULTS, RSK, DOVEE, GCN, MESSI, SJN, DRYHT or MOHAK
Portland, OR	PDT, TIMEE

Salt Lake City	HVE, DTA, MLF, BCE, OAL, MTU, BVL, OCS, TWF, DBS, BPI or TCH J56 CHE or TCH J173 EKR
Saint Louis	VIH, MAP, MYERZ, MCM or HLV MCI
San Antonio Terminal Area	FUZ, SJT, MQP, ABI or Aircraft North of LFK, LFK or Aircraft South of HUB, ELA or Aircraft South of LFK and North of HUB LCH
San Diego	TRM EED or TRM PKE or TRM JOTNU BLD
San Francisco Bay Area Oakland San Jose	GALLI, INSLO, HAROL JSICA GALLI, INSLO, HAROL JSICA GALLI or INSLO
Seattle	BLUIT
Southwest Florida Airports (RSW/FMY)	JOCKS KPASA Q118 LENIE or JOCKS KPASA Q116 CEEYA or JOCKS KPASA Q110 FEONA or JOCKS SMELZ Q106 GADAY or JOCKS SMELZ Q106 BULZI
Tampa Terminal Area	FEONA, BULZI or BRUTS Q118 LENIE or GULFR Q116 CEEYA or BULZI Q106 GADAY

*MSP area departures with destinations east of 93 degrees west longitude via preferred IFR routing.

Catch Points for Airports Located Outside HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to specific destinations which are outside the HAR Phase I airspace.

Atlanta Terminal Area	Aircraft through ZME airspace from ZKC airspace east of FAM, Pless Q19 BNA or Aircraft through ZME airspace from ZKC airspace west of FAM, ARG Q26 DEVA or MEM or Aircraft through ZME airspace from ZID airspace west of a line from VHP to BWG, BNA or Aircraft through ZME airspace from ZID airspace east of a line from VHP to BWG, BWG or Aircraft through ZME airspace from ZFW airspace, MEM or MEI HONIE (RNAV)–STAR or PATYN HONIE (RNAV)–STAR
-----------------------	--

Baltimore–Washington*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA or VUZ
Boston*	GEP, CRL, ECK, IIU, BNA or VUZ
Buffalo*	GEP, CRL
Hartford Bradley*	GEP, CRL
Canton–Akron*	GIJ, VHP, GEP
Charlotte	BNA, VUZ
Cincinnati Terminal Area	BNA, PXV or Aircraft north of SLC, JOT or Aircraft over or south of SLC, ENL or SLC or SFO departures, ENL, JOT
Cleveland Terminal Area*	OBK
Detroit Terminal Area	BAE MKG POLAR–STAR or VHP FWA MIZAR–STAR
Detroit Young	VHP FWA or LAN SPRTN–STAR
Indianapolis Terminal Area	BIB, SPI, JOT
Louisville	ENL, MEM
Newark*	GEP, VHP, FLM, IIU, BNA, VUZ or IOW GIJ J554 CRL J584 SLT FQM
New York Kennedy*	GEP, VHP, FLM, IIU, BNA, VUZ or DBQ J94 PMM J70 LVZ LENDY–STAR
New York LaGuardia*	GIJ, GEP, VHP, BAE, FLM, IIU, BNA, VUZ
Philadelphia Terminal Area*	GIJ, GEP, VHP, BAE, WHETT, BNA, VUZ
Pittsburgh Terminal Area*	VHP, GIJ, BAE, GEP
Pontiac	LFD, LAN, VHP, FWA, GEP
Providence	JHW, HEMDI, CESNA, GEP, GRB, TVC, ASP, VHP, IIU, BNA, VUZ
Raleigh–Durham	FLM, IIU, BNA, VUZ
Toronto Terminal Area	ECK, SVM, SSM, GEP
Teterboro*	GEP, VHP, CRL, BNA, VUZ
Washington Dulles/National*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA, VUZ
White Plains*	GEP, VHP, CRL, FLM, IIU, BNA, VUZ
Willow Run*	LAN, LFD, VHP, FWA, GEP

*Eastbound aircraft over flying ZMP center airspace entering Toronto center airspace, file direct SSM or via J63, J522, Q505, Q504, Q502, Q501

or
Entering ZAU or ZOB airspace from north of DPR J16 MCW, GEP

or
Entering ZAU or ZOB airspace from or south of DPR J16 MCW, CRL.

Catch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to airports which are below HAR Phase I airspace.

Albuquerque Terminal Area

CURLY CURLY–STAR
or
ESPAN FRIHO–STAR
or
LAVAN LAVAN–STAR
or
FTI FRIHO–STAR
or
MIERA MIERA–STAR

Austin Terminal Area

Aircraft west of a north–south line at LFK, BLEWE
or
Aircraft east of a north–south line at LFK, IDU
or
LLO

Boca Raton, FL

CEW DEFUN Q112 INPIN SHDAY (RNAV)–STAR
Aircraft through ZHU remain south of ZME and ZTL airspace
or
DEFUN Q112 INPIN SHDAY (RNAV)–STAR
Aircraft through ZHU remain south of ZME and ZTL airspace
or
SZW INPIN SHDAY (RNAV)–STAR

Chicago Midway

CVA MOTIF–STAR
or
PIA MOTIF–STAR
or
DBQ CVA MOTIF–STAR
or
LMN MOTIF–STAR

Chicago O'Hare Terminal Area

GEP DLL MSN JVL JANESVILLE–STAR
or
TVC PULLMAN–STAR
or
FOD DBQ JVL JANESVILLE–STAR
or
MCW JANESVILLE–STAR
or
GCK IRK BRADFORD–STAR

Dallas/Fort Worth Terminal Area

IRW, LOSZY, FSM, LIT, SQS, MLU, AEX, JUMBO, TQA, TURKI, HEATR
Aircraft through ZME airspace from north and west of PXV, RZC, Q23 FSM
or
Aircraft through ZME airspace from east of PXV, PXV Q25 MEEOW
or
Aircraft through ZME airspace from J6 down to, but not including J52, LIT, SQS
or
Aircraft through ZME airspace from J52 and south of J52, SQS

Denver Terminal Area	OATHE DANDD-STAR
	or
	HGO QUAIL-STAR
	or
	LOPEC-STAR
	or
	ALS LARKS-STAR
	or
	HBV POWDR-STAR
	or
	EKR TOMSN-STAR
	or
	CHE TOMSN-STAR
	or
	BFF LANDR-STAR
	or
	LBF SAYGE-STAR
	or
	HCT SAYGE-STAR
	or
	RSK LARKS-STAR
	or
	LAA QUAIL-STAR
	or
	GCK J154 RYLIE DANDD-STAR
	or
	OCS J154 ALPOE RAMMS-STAR
	or
	YANKI J114 SNY LANDR-STAR
	or
	Aircraft filed BIL or east, MBW RAMMS-STAR
	CEW DEFUN Q104 PIE SWAGS (RNAV)-STAR
	Aircraft through ZHU airspace remain south ZME and ZTL airspace
	or
	SZW HEVVN Q104 PIE SWAGS (RNAV)-STAR
Ft Lauderdale or Ft Lauderdale Executive	CRP, CVE, LLO, LUKIY, SAT
	or
	Aircraft south and east of LLA, JEPEG
	or
	MISLE Q40 AEX
	or
	Aircraft north and east of SJI, SJI
	or
	Aircraft east of PXV, PXV Q31 DHART SWB
	or
Houston Bush	Aircraft north and west of PXV, PROWL Q33 DHART SWB
	CRP, ELLVR, SAT, SWB
	or
	Aircraft south and east of GIRLY, KCEEE
	or
	Aircraft north and east of SJI, SJI
	or
	BESOM Q38 ROKIT ROKIT-STAR
	or
	Aircraft east of PXV, PXV Q29 HARES SWB
Houston Hobby	or
	Aircraft north and west of PXV, PROWL Q33 DHART SWB
	GADAY ZOOSS TAY
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	ZOOSS TAY
Jacksonville	

250	HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING
John Wayne–Orange County	HEC, PGS, BLD or Aircraft south of TBC from ZAB airspace, HIPPI
Kansas City Terminal Area	LMN BRAYMER–STAR or PWE ROBINSON–STAR or EMP JHAWK–STAR
Las Vegas	DILCO, LIDAT, IGM or Aircraft over PGA or north of PGA KSINO or Aircraft south of PGA PGS LYNSY
Los Angeles Terminal Area	Aircraft North of TBC, HEC, PGS or Aircraft South of TBC from ZAB airspace, HIPPI, MESSI
Miami Terminal Area	CEW DEFUN Q104 CYY DEEDS (RNAV)–STAR Aircraft through ZHU airspace remain south ZME and ZTL and ZHU airspace or SZW HEVVN Q104 CYY DEEDS (RNAV)–STAR
Minneapolis Terminal Area	Aircraft from north, west, south, FAR GOPHER–STAR or RWF SKETR–STAR or ALO KASPR–STAR or BRD GOPHER–STAR or BAE EAU CLAIRE–STAR or FOD TWOLF–STAR
Memphis Terminal Area	ARG, BWG, FSM, PXV, LIT, RZC, SQS, VUZ, BNA, GQO, ELD
Naples, FL	CEW DEFUN Q104 PLYER PIKKR (RNAV)–STAR Aircraft through ZHU AIRSPACE remain south of ZME and ZTL and ZHU airspace or SZW HEVVN Q104 PLYER PIKKR (RNAV)–STAR
Nashville	CCT, GHM, GUITR, TINGS, VOLLS
New Orleans Terminal Area	BLUEZ, GPT, LCH, MCB, TBD, FATSO
Oakland	ILA or KATTS PAMMY or Aircraft over or south of a line ILC J16 DVC REANA KATTS PAMMY or Aircraft from north of ILC, JOPER PAMMY or KATTS PAMMY or Aircraft over or south of ILC, REANA KATTS PAMMY
Orlando Terminal Area	GADAY Q108 CLAWZ LEESE–STAR Aircraft through ZHU airspace remain south of ZME/ZTL airspace or OTK LEESE–STAR

Palm Beach, FL	CEW DEFUN Q112 INPIN GULLO (RNAV)–STAR Aircraft through ZHU airspace remain south of ZME and ZTL airspace or SZW INPIN GULLO (RNAV)–STAR
Phoenix	CORKR DRK or Aircraft from ZDV airspace, GUP or Aircraft from ZAB airspace, ZUN, MOHAK, SSO or VYLLA TUS
Phoenix Satellites	FLG, SSO, MOHAK or VYLLA, TUS
Portland, OR Terminal Area	ARNIT BONVL–STAR or LARNO BONVL–STAR or MOXEE MOXEE–STAR
St. Louis Terminal Area	SGF TRAKE–STAR or BUM TRAKE–STAR or ANX TRAKE–STAR or LMN IRK RIVRS–STAR or RBS VANDALIA–STAR
Salt Lake City Terminal Area	JNC J12 HELPR SPANE–STAR or EKR MTU SPANE–STAR or BCE DTA–TCH or MLF DTA–TCH or BVL BONNEVILLE–STAR or BYI BEARR–STAR or PIH BEARR–STAR or DBS BRIGHAM CITY–STAR or JAC BRIGHAM CITY–STAR or BPI BRIGHAM CITY–STAR or OCS BRIGHAM CITY–STAR
San Diego Terminal Area	EED, LAX, GBN
Santa Ana	HEC, PGS, BLD, HIPPI
San Antonio Terminal Area	IDU, CSI, JCT, LLO, CRP, LRD or West of a north–south line at LFK, BLEWE or East of a north–south line at LFK, IDU

San Francisco

FMG GOLDEN GATE–STAR
or
MVA MODESTO–STAR
or
ENI GOLDEN GATE–STAR
or
OAL MODESTO–STAR
or
South of a line ILC to DVC,
REANA KATTS OAL MODESTO–STAR

San Jose

FMG HYP EL NIDO–STAR
or
OAL HYP EL NIDO–STAR
or
ENI GOLDEN GATE–STAR
or
South of a line ILC to DVC,
REANA KATTS KICHI CANDA EL NIDO–STAR

Seattle Terminal Area

Aircraft From northeast, southeast, south,
TEMPL GLASR–STAR
or
SUNED CHINS–STAR
or
BTG OLMYPIA–STAR

Southwest Florida Airports
RSW and FMY

CEW DEFUN Q104 SWABE JOSFF–STAR
Aircraft through ZHU airspace remain south of ZME and Z
airspace
or
SZW HEVVN Q104 SWABE JOSFF–STAR

Tampa Terminal Area

CEW DEFUN Q104 HEVVN DARBS–STAR
Aircraft through ZHU airspace remain south of ZME and Z
airspace
or
SZW DARBS–STAR

Tucson

DRK PXR
or
MOHAK GBN

VISUAL FLIGHT RULES (VFR) WAYPOINTS

VFR Waypoint names consist of five letters beginning with "VP". Stand-alone VFR Waypoints are portrayed on VFR Charts using the same four-point star symbol currently used for Instrument Flight Rules (IFR) Waypoints.

VFR Waypoints collocated with Visual Checkpoints (Visual Reporting Points) are portrayed with a Visual Check Point flag.

The VFR Waypoint name is shown in parentheses adjacent to the Visual Check Point name.

VFR Waypoint names are not intended to be pronounceable and shall not be used in ATC communications.

CAUTION: GPS accuracy necessitates extra vigilance for other aircraft when navigating near any fix retrieved from a GPS database.

BALTIMORE–WASHINGTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPAXI	_____	N38°34.57' /W076°20.38'
VPONX	_____	N39°06.65' /W076°55.92'
VPPOF	_____	N38°56.32' /W076°36.90'

BOSTON HELICOPTER CHART

VPBAY	_____	N42°16.17' /W070°49.48'
VPBLT	_____	N42°19.67' /W070°53.40'
VPCGS	_____	N42°22.08' /W071°03.13'
VPEVS	_____	N42°23.52' /W071°04.10'
VPFEN	_____	N42°12.58' /W071°08.88'
VPFRE	_____	N42°25.03' /W071°12.32'
VPGLV	_____	N42°21.88' /W070°52.18'
VPHAM	_____	N42°30.13' /W071°07.15'
VPPIK	_____	N42°20.37' /W071°15.93'
VPQUA	_____	N42°12.10' /W071°04.78'
VPQUB	_____	N42°12.60' /W070°59.83'
VPSPF	_____	N42°24.20' /W071°09.47'
VPTOB	_____	N42°31.42' /W070°59.82'
VPWAN	_____	N42°36.88' /W071°19.45'

BOSTON TERMINAL AREA CHART

VPCOH	COHASSET	N42°13.58' /W070°48.94'
VPCUT	CUTTYHUNK HARBOR	N41°25.50' /W070°55.03'
VPFRA	FRAMINGHAM SHOPPING CENTER	N42°18.16' /W071°23.65'
VPHOL	WOODS HOLE	N41°31.06' /W070°40.60'
VPHUL	HULL	N42°18.20' /W070°55.30'
VPLPT	NANTUCKET GREAT POINT	N41°23.41' /W070°02.78'
VPNED	NEEDHAM TOWERS	N42°18.51' /W071°14.64'
VPPEA	PEABODY SHOPPING CENTER	N42°32.52' /W070°56.69'
VPROC	ROCKINGHAM RACE TRACK	N42°46.29' /W071°13.57'
VPSCI	SCITUATE	N42°11.89' /W070°43.69'
VPTPT	NANTUCKET THIRD POINT	N41°18.51' /W070°03.37'
VPTUC	TUCKERNUCK	N41°18.31' /W070°15.43'
VPWAK	WAKEFIELD	N42°30.72' /W071°05.24'
VPWAN	WANG TOWERS	N42°36.88' /W071°19.45'

CHARLOTTE SECTIONAL CHART

VPATO	_____	N34°37.37' /W076°31.47'
VPAVA	_____	N34°57.00' /W077°16.50'
VPBFE	_____	N32°16.38' /W080°47.50'
VPBRA	_____	N36°13.75' /W076°08.08'
VPGCE	_____	N36°03.90' /W076°36.42'
VPGHI	_____	N35°15.30' /W075°31.25'
VPGIO	_____	N35°32.50' /W076°37.33'
VPKJU	_____	N35°26.58' /W076°10.22'
VPLMN	_____	N34°55.43' /W077°46.42'
VPMAB	_____	N34°42.20' /W077°03.50'
VPNPO	ISLE OF PALMS	N32°47.78' /W079°46.45'
VPOKY	_____	N35°06.53' /W075°59.17'
VPREP	_____	N32°33.98' /W080°21.82'
VPRRS	_____	N33°25.45' /W079°07.60'
VPUMO	_____	N35°35.63' /W075°28.08'
VPWZO	_____	N36°00.87' /W075°40.07'
VPZIE	_____	N32°01.62' /W080°53.42'

DENVER TERMINAL AREA CHART/FLYWAY CHART

VPBEN	_____	N39°44.28' /W104°26.00
VPFTG	_____	N39°44.35' /W104°32.75
VPNIC	NORTH INTERCHANGE	N39°58.90' /W104°59.27

HOUSTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPBWY	_____	N29°46.25' /W095°09.24
VPDTN	_____	N29°46.59' /W095°22.01
VPGLA	_____	N30°08.32' /W095°06.62
VPGLB	_____	N30°07.80' /W094°55.70
VPKTY	_____	N29°47.05' /W095°44.92
VPPLN	_____	N30°08.80' /W095°50.42
VPRSN	_____	N29°30.00' /W095°41.00
VPSND	_____	N29°23.13' /W095°28.86
VPSNT	_____	N29°49.29' /W094°53.94
VPTNE	_____	N29°47.48' /W095°03.34
VPTNW	_____	N29°47.06' /W095°33.81
VPTRK	_____	N29°24.06' /W095°10.44

JACKSONVILLE SECTIONAL CHART

VPAFI	_____	N31°49.35' /W081°51.07
VPAFY	_____	N30°07.00' /W081°21.33
VPBEC	_____	N29°46.25' /W081°15.10
VPCJA	_____	N29°30.00' /W081°06.00
VPCKY	_____	N28°46.50' /W082°34.00
VPCNY	_____	N28°30.00' /W080°45.00
VPDAD	DADE CITY	N28°22.57' /W082°11.25
VPDAR	_____	N31°22.38' /W081°24.13
VPDFI	_____	N29°00.17' /W081°20.85
VPDUT	_____	N27°37.70' /W082°09.10
VPEAR	CLEARWATER BEACH	N27°58.67' /W082°49.83
VPEGV	_____	N29°39.97' /W081°24.87
VPFFU	_____	N28°57.08' /W081°00.33
VPGPE	ST PETE BEACH	N27°43.50' /W082°44.67
VPHAA	_____	N30°04.02' /W083°40.02
VPHUC	_____	N28°19.87' /W082°43.77
VPIWA	MIDWAY	N31°48.33' /W081°25.85
VPJMY	_____	N29°26.92' /W081°18.27
VPKER	LAKE PARKER	N28°04.00' /W081°56.00
VPLEV	_____	N28°48.00' /W080°52.00
VPLJA	_____	N29°00.00' /W080°51.00
VPMAI	_____	N30°50.02' /W084°56.63
VPTLH	_____	N30°32.70' /W083°52.22
VPXZY	_____	N29°35.00' /W083°10.00
VPYIW	_____	N30°42.28' /W081°27.25
VPZIE	_____	N32°01.62' /W080°53.42

KANSAS CITY SECTIONAL CHART

VPAGO	_____	N37°50.33' /W090°29.03
VPBEK	_____	N37°15.07' /W092°30.67
VPDEN	_____	N37°46.75' /W092°19.20
VPENE	_____	N37°44.75' /W091°55.78
VPESB	_____	N36°59.48' /W091°00.88
VPFME	_____	N37°41.00' /W092°38.33
VPGXV	_____	N37°15.50' /W091°40.17
VPMBE	_____	N37°11.08' /W090°27.92
VPMKE	_____	N37°24.47' /W092°40.00
VPROV	_____	N38°01.72' /W091°12.81
VPUTT	_____	N37°52.05' /W092°01.20

KANSAS CITY TERMINAL AREA CHART

KLAMATH FALLS SECTIONAL CHART

LOS ANGELES HELICOPTER CHART

NW. 23 SEP 2010 to 18 NOV 2010

256 VFR WAYPOINTS		
LOS ANGELES SECTIONAL CHART		
WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCNG	CONEJO GRADE US HWY 101	N34°12.54' /W118°59.61
VPCSU	CSU CHANNEL ISLANDS	N34°09.76' /W119°02.53
VPFPL	OXNARD FINANCIAL PLAZA	N34°13.71' /W119°10.39
VPSTC	SATICOY BRIDGE	N34°16.62' /W119°08.34

LOS ANGELES TERMINAL AREA CHART/FLYWAY CHART		
VPCNG	CONEJO GRADE US HWY 101	N34°12.54' /W118°59.61
VPCSU	CSU CHANNEL ISLANDS	N34°09.76' /W119°02.53
VPGTY	GETTY CENTER	N34°04.84' /W118°28.66
VPLBP	BANNING PASS	N33°56.05' /W116°59.63
VPLCC	CHAFFEY COLLEGE	N34°08.87' /W117°34.33
VPLCP	CAJON PASS	N34°18.07' /W117°27.68
VPLDL	DISNEYLAND	N33°48.72' /W117°55.13
VPLDP	DANA POINT	N33°27.62' /W117°42.87
VPLDS	DODGER STADIUM	N34°04.42' /W118°14.42
VPLFX	91/605 INTERCHANGE	N33°52.38' /W118°06.08
VPLGP	GRIFFITH PARK OBSERVATORY	N34°07.10' /W118°18.02
VPLHF	110/405 FWYS	N33°51.42' /W118°17.10
VPLHP	HUNTINGTON PIER	N33°39.32' /W118°00.25
VPLKH	KING HARBOR	N33°50.75' /W118°23.88
VPLLC	L.A. COLISEUM	N34°00.83' /W118°17.27
VPLLM	LAKE MATHEWS	N33°50.58' /W117°26.85
VPLMM	MAGIC MOUNTAIN	N34°26.20' /W118°36.28
VPLMS	MILE SQUARE PARK	N33°43.40' /W117°56.77
VPLPD	PRADO DAM	N33°53.40' /W117°38.48
VPLPP	PACIFIC PALISADES	N34°02.13' /W118°32.15
VPLQM	QUEEN MARY	N33°45.17' /W118°11.37
VPLRB	ROSE BOWL	N34°09.67' /W118°10.05
VPLRT	SANTA ANITA RACE TRACK	N34°08.45' /W118°02.65
VPLSA	SANTA ANA CANYON	N33°52.03' /W117°42.68
VPLSB	SANTA FE FLOOD BASIN	N34°07.72' /W117°57.30
VPLSC	STATE COLLEGE	N33°52.97' /W117°53.13
VPLSF	SAN FERNANDO RESERVOIR	N34°17.87' /W118°29.00
VPLSP	SIGNAL PEAK	N33°36.33' /W117°48.63
VPLSR	HAWTHORNE & 405 FREEWAY	N33°53.07' /W118°21.13
VPLSS	SANTA SUSANA PASS	N34°16.00' /W118°38.43
VPLTW	TUJUNGA WASH & FOOTHILL	N34°16.40' /W118°20.30
VPLVT	VINCENT THOMAS BRIDGE	N33°44.97' /W118°16.32
VPLWT	WATER TANK	N34°10.82' /W118°46.27
VPNEW	NEWHALL PASS	N34°20.18' /W118°30.72
VPSTC	SATICOY BRIDGE	N34°16.62' /W119°08.34

MIAMI SECTIONAL CHART		
VPACH	HOLLYWOOD BEACH	N26°00.92' /W080°06.93
VPBOV	_____	N27°57.00' /W080°46.75
VPCLE	_____	N26°27.07' /W082°00.88
VPCTE	_____	N26°09.28' /W081°20.70
VPDAD	DADE CITY	N28°22.57' /W082°11.25
VPDUT	_____	N27°37.70' /W082°09.10
VPDZE	_____	N27°19.00' /W080°44.17
VPEAR	CLEARWATER BEACH	N27°58.67' /W082°49.83
VPEDY	ANDYTOWN TOLLGATE	N26°08.78' /W080°28.00
VPFAH	_____	N26°25.40' /W081°29.67
VPGPE	ST PETE BEACH	N27°43.50' /W082°44.67
VPHRO	_____	N27°05.97' /W082°12.20
VPHUC	_____	N28°19.87' /W082°43.77
VPIBR	_____	N27°12.47' /W081°40.22
VPKER	LAKE PARKER	N28°04.00' /W081°56.00
VPKOE	_____	N24°40.08' /W081°20.55
VPLYY	_____	N24°49.07' /W080°49.17
VPMBO	GULFSTREAM PARK	N25°58.57' /W080°08.17
VPOBA	PUMPING STATION	N26°28.30' /W080°26.75
VPRBI	_____	N25°50.67' /W080°55.18
VPRNL	RANGER STATION	N25°22.92' /W080°36.58
VPWMO	_____	N27°03.00' /W080°35.00

MIAMI TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPACH	HOLLYWOOD BEACH	N26°00.92' /W080°06.93'
VPEDY	ANDYTOWN TOLLGATE	N26°08.78' /W080°28.00'
VPMBO	GULFSTREAM PARK	N25°58.57' /W080°08.17'
VPOBA	PUMPING STATION	N26°28.30' /W080°26.75'
VPRBI		N25°50.67' /W080°55.18'
VPRNL	RANGER STATION	N25°22.92' /W080°36.58'

NEW ORLEANS SECTIONAL CHART

VPGPT		N30°25.95' /W089°05.62'
VPLIP	PHILLIPS INLET	N30°16.23' /W085°59.25'
VPMAI		N30°50.02' /W084°56.63'
VPMOB		N30°23.00' /W088°31.72'
VPRAM		N30°18.95' /W089°35.88'
VPRER		N30°13.87' /W085°20.67'
VPRIV		N30°54.85' /W087°57.82'
VPSAW		N30°49.65' /W089°07.42'
VPTHR		N30°19.93' /W087°08.50'

NEW YORK HELICOPTER CHART

VPJAY		N40°59.00' /W073°07.00'
VPLYD		N40°57.37' /W073°29.59'
VPROK		N40°52.70' /W073°44.24'

PHOENIX TERMINAL AREA CHART/FLYWAY CHART

VPALL	ALLENVILLE	N33°20.97' /W112°35.20'
VPAQU	AQUEDUCT PUMPING STATION	N33°40.05' /W112°41.38'
VPARM	ARROWHEAD MALL	N33°38.52' /W112°13.48'
VPAWG	AHWATUKEE GOLF COURSE	N33°19.98' /W111°59.08'
VPAMZ	ARIZONA MILLS	N33°23.43' /W111°57.88'
VPBAR	BARTLETT DAM	N33°49.10' /W111°37.92'
VPCCC	COUNTRY CLUB & CANAL	N33°30.73' /W111°50.37'
VPCLN	CANAL	N33°33.23' /W111°46.89°
VPFRB	FIREBIRD LAKE	N33°16.35' /W111°58.10'
VPFTN	FOUNTAIN HILLS	N33°36.12' /W111°42.72'
VPGLX	GILA CROSSING	N33°16.55' /W112°10.08'
VPGPP	GLENDALE POWER PLANT	N33°33.27' /W112°13.00'
VPMAR	MARICOPA	N33°03.42' /W112°02.88'
VPMHS	MESQUITE HIGH SCHOOL	N33°20.53' /W111°49.58'
VPNRV	NEW RIVER	N33°55.08' /W112°08.45'
VPNTT	NORTH TEST TRACK	N33°03.50' /W111°55.83'
VPPIR	PIR	N33°22.52' /W112°18.90'
VPQTR	QUINTERO GOLF COURSE	N33°49.53' /W112°23.58'
VPRVC	RIO VERDE COMMUNITY	N33°44.37' /W111°39.62'
VPSMC	SOUTH MOUNTAIN COLLEGE	N33°23.02' /W112°02.12'
VPSQP	SQUAW PEAK	N33°32.83' /W112°01.27'
VPSSS	SUPERSTITION SPRINGS MALL	N33°23.50' /W111°41.37'
VPSTN	SANTAN MOUNTAINS	N33°09.23' /W111°40.92'
VPSTT	SOUTH TEST TRACK	N32°56.25' /W111°59.67'
VPZZZ		N33°20.18' /W111°26.53'

ST LOUIS TERMINAL AREA CHART/FLYWAY CHART

VPAGN	TV ANTENNA	N38°32.08' /W090°22.42'
VPBPE		N38°23.80' /W090°20.38'
VP CJY	HOLIDAY SHORES	N38°55.00' /W089°56.00'
VPCOJ	WINFIELD DAM	N39°00.28' /W090°41.23'
VPDFA	JEFFERSON BARRACKS BRIDGE	N38°29.18' /W090°16.47'
VPEAZ	BUSCH STADIUM	N38°37.43' /W090°11.55'
VPEDZ	WATER TANKS	N38°45.30' /W090°34.87'
VPEGR	GAS TANKS	N38°35.80' /W090°19.32'
VPEOX	ST PETERS	N38°47.17' /W090°39.25'

258		VFR WAYPOINTS
WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPFAI	HOWELL ISLAND	N38°40.00' /W090°43.00
VPFFY	_____	N38°55.37' /W090°17.30
VPGPF	_____	N38°35.60' /W090°26.92
VPGVI	_____	N38°32.30' /W090°27.80
VPHRQ	CHAIN OF ROCKS BRIDGE	N38°45.88' /W090°10.42
VPIBO	WATERLOO	N38°20.00' /W090°09.00
VPJMU	HORSESHOE LAKE	N38°41.00' /W090°05.00
VPKNY	PACIFIC	N38°29.00' /W090°44.00
VPLES	ST CHARLES	N38°47.00' /W090°30.00
VPLIW	SIX FLAGS	N38°30.67' /W090°40.47
VPLXU	GATEWAY ARCH	N38°37.50' /W090°11.00
VPNSY	WOOD RIVER REFINERIES	N38°50.00' /W090°05.00
VPNZY	WENTZVILLE	N38°48.83' /W090°50.98
VPRAZ	JERSEYVILLE	N39°07.00' /W090°20.00
VPRMO	FOREST PARK	N38°38.00' /W090°17.00
VPWKO	COLUMBIA	N38°27.00' /W090°12.00
VPXXI	MILLSTADT	N38°27.50' /W090°05.68
VPYID	MOSENTHEIN ISLAND	N38°43.00' /W090°12.25

SALT LAKE CITY HELICOPTER CHART

VPAIR	SALT AIR	N40°44.85' /W112°11.22
VPBEE	SOUTH INTERCHANGE	N40°38.18' /W111°54.23
VPBRN	BARN	N40°54.28' /W112°10.15
VPCAP	STATE CAPITOL	N40°46.67' /W111°53.25
VPCHS	_____	N40°42.28' /W112°05.92
VPCOP	BINGHAM COPPER MINE	N40°31.38' /W112°09.00
VPCWY	CAUSEWAY	N41°05.37' /W112°07.17
VPCYN	PARLEYS CANYON	N40°42.67' /W111°48.10
VPFPC	FREE PORT CENTER	N41°05.92' /W112°02.27
VPFPK	FRANCIS PEAK	N41°01.98' /W111°50.30
VPGFS	GARFIELD STACK	N40°43.28' /W112°11.88
VPHVE	SPAGHETTI BOWL	N40°43.50' /W111°54.22
VPJRT	JORDAN RIVER TEMPLE	N40°35.02' /W111°55.58
VPKSL	KSL ANTENNA	N40°46.80' /W112°05.80
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08' /W111°53.57
VPMDH	MCKAY DEE HOSPITAL	N41°11.50' /W111°57.08
VPMMT	MICROWAVE TOWERS	N40°48.50' /W111°53.37
VPMSH	_____	N41°01.67' /W112°02.47
VPNSL	_____	N40°50.15' /W111°54.90
VPNTP	_____	N41°03.57' /W112°14.23
VPOGE	GRAIN ELEVATOR	N41°13.13' /W112°00.45
VPOPS	POWER STATION	N41°20.38' /W112°02.78
VPPEN	STATE PRISON	N40°29.88' /W111°53.62
VPPPT	PROMONTORY POINT	N41°12.28' /W112°25.73
VPPTM	POINT OF THE MOUNTAIN	N40°27.42' /W111°54.83
VPPVO	PROVO CANYON	N40°18.77' /W111°39.45
VPRWY	_____	N40°48.48' /W112°00.33
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83' /W111°54.85
VPTIP	SOUTH TIP	N40°50.93' /W112°10.92
VPWBR	WEBER CANYON	N41°08.17' /W111°54.83
VPWBT	_____	N40°38.00' /W112°03.33

SALT LAKE CITY TERMINAL AREA CHART/FLYWAY CHART

VPAIR	SALT AIR	N40°44.85' /W112°11.22
VPBEE	SOUTH INTERCHANGE	N40°38.18' /W111°54.23
VPBRN	BARN	N40°54.28' /W112°10.15
VPCAP	STATE CAPITOL	N40°46.67' /W111°53.25
VPCHS	_____	N40°42.28' /W112°05.92
VPCOP	BINGHAM COPPER MINE	N40°31.38' /W112°09.00
VPCVI	CENTERVILLE INTERCHANGE	N40°55.30' /W111°53.43
VPCWY	CAUSEWAY	N41°05.37' /W112°07.17
VPCYN	PARLEYS CANYON	N40°42.67' /W111°48.10
VPFPC	FREE PORT CENTER	N41°05.92' /W112°02.27
VPFPK	FRANCIS PEAK	N41°01.98' /W111°50.30
VPGFS	GARFIELD STACK	N40°43.28' /W112°11.88

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPHVE	SPAGHETTI BOWL	N40°43.50' /W111°54.22'
VPJRT	JORDAN RIVER TEMPLE	N40°35.02' /W111°55.58'
VPKSL	KSL ANTENNA	N40°46.80' /W112°05.80'
VLGN	LAGOON AMUSEMENT PARK	N40°59.08' /W111°53.57'
VPMDH	MCKAY DEE HOSPITAL	N41°11.50' /W111°57.08'
VPMMT	MICROWAVE TOWERS	N40°48.50' /W111°53.37'
VPMSH	_____	N41°01.67' /W112°02.47'
VPNSL	_____	N40°50.15' /W111°54.90'
VPNTP	_____	N41°03.57' /W112°14.23'
VPOGE	GRAIN ELEVATOR	N41°13.13' /W112°00.45'
VPOPS	POWER STATION	N41°20.38' /W112°02.78'
VPPEP	STATE PRISON	N40°29.88' /W111°53.62'
VPPTT	PROMONTORY POINT	N41°12.28' /W112°25.73'
VPPTM	POINT OF THE MOUNTAIN	N40°27.42' /W111°54.83'
VPVVO	PROVO CANYON	N40°18.77' /W111°39.45'
VPRWY	_____	N40°48.48' /W112°00.33'
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83' /W111°54.85'
VP TIP	SOUTH TIP	N40°50.93' /W112°10.92'
VP UOU	U OF U EVENTS CENTER	N40°45.73' /W111°50.28'
VPWBR	WEBER CANYON	N41°08.17' /W111°54.83'
VPWBT	_____	N40°38.00' /W112°03.33'
VPZOO	HOGLE ZOO	N40°45.00' /W111°48.95'

SAN DIEGO TERMINAL AREA CHART/FLYWAY CHART

VPLDP	DANA POINT	N33°27.62' /W117°42.87'
VPLSP	SIGNAL PEAK	N33°36.33' /W117°48.63'
VPOCN	_____	N33°14.15' /W117°26.63'
VPSBC	BARONA CASINO	N32°56.25' /W116°52.60'
VPSBL	_____	N33°05.18' /W117°18.55'
VPSBM	BLACK MOUNTAIN	N32°58.87' /W117°07.00'
VPSCF	_____	N32°48.55' /W117°09.17'
VPSCM	COWLES MOUNTAIN	N32°48.72' /W117°01.97'
VPSCP	CRYSTAL PIER	N32°47.77' /W117°15.42'
VPSCR	_____	N32°39.37' /W117°07.30'
VPSFB	IRON MOUNTAIN	N32°58.25' /W116°57.33'
VPSLJ	LAKE JENNINGS	N32°51.53' /W116°53.28'
VPSMB	_____	N32°45.57' /W117°12.22'
VPSMP	_____	N33°22.70' /W117°36.75'
VPSMS	MOUNT SOLEDAD	N32°50.40' /W117°15.10'
VPSMV	_____	N32°45.75' /W117°09.80'
VPSMW	MOUNT WOODSON	N33°00.52' /W116°58.23'
VPSOP	OTAY MESA PRISON	N32°35.82' /W116°55.28'
VPSOT	LOWER OTAY LAKE	N32°37.73' /W116°55.38'
VPSPL	SOUTH POINT LOMA	N32°39.90' /W117°14.55'
VPSPP	POWER PLANT	N33°08.25' /W117°20.23'
VPSQS	QUALCOMM STADIUM	N32°46.98' /W117°07.23'
VPSRT	DEL MAR RACE TRACK	N32°58.58' /W117°15.95'
VPSSM	SAN MIGUEL MOUNTAIN	N32°41.78' /W116°56.18'
VPSSV	SAN VICENTE ISLAND	N32°55.53' /W116°55.00'
VPSTP	TORREY PINES GOLF COURSE	N32°54.17' /W117°14.68'
VPSVA	_____	N33°11.48' /W117°16.38'

SAN FRANCISCO SECTIONAL CHART

VPKBG	KINGSBURY GRADE	N38°58.75' /W119°53.20'
-------	-----------------	-------------------------

SAN FRANCISCO TERMINAL AREA CHART/FLYWAY CHART

VPALT	ALTAMONT PASS	N37°44.35' /W121°35.42'
VPANT	ANTIOCH BRIDGE	N38°01.45' /W121°45.02'
VPBBR	BENICIA BRIDGE	N38°02.50' /W122°07.45'
VP CAL	CALAVERAS RESERVOIR	N37°28.16' /W121°48.93'
VP CBT	LAKE CHABOT	N37°43.68' /W122°06.94'
VP COY	COYOTE HILLS	N37°32.50' /W122°05.06'
VP CQZ	CARQUINEZ BRIDGE	N38°03.66' /W122°13.52'
VP CRL	_____	N37°11.00' /W121°41.06'
VP CRY	CRYSTAL SPRINGS CAUSEWAY	N37°30.56' /W122°21.10'

WAYPOINT IDENT

VPCSH
VPDAM
VPDLR
VPDUB
VPEMB
VPGGF
VPGIL
VPHHH
VPKGO
VPLEX
VPMID
VPMOR
VPNUM
VPPAC
VPPRU
VPSAR
VPSLA
VPSTB
VPSUN
VPUTC
VPWAL
VPWAM
VPWFR

COLLOCATED VFR CHECKPOINT

CAL STATE UNIVERSITY
DEL VALLE DAM

DUBLIN
EMBASSY SUITES
GOLDEN GATE FIELDS
GILROY
HAMILTON
KGO
LEXINGTON RESERVOIR
MID-SPAN SAN MATEO BRIDGE
MORMON TEMPLE
NUMMI PLANT

PRUNEYARD
SARATOGA
SLAC/LINEAR ACCELERATOR
STINSON BEACH
SUNOL GOLF COURSE
U.T.C.
WALNUT CREEK

CEMENT PLANT

LOCATION

N37°39.52'/W122°03.52'
N37°36.91'/W121°44.78'
N37°07.00'/W121°47.06'
N37°42.06'/W121°55.36'
N37°26.05'/W121°53.83'
N37°53.07'/W122°18.71'
N37°01.37'/W121°33.99'
N38°03.58'/W122°30.66'
N37°31.58'/W122°06.10'
N37°11.66'/W121°59.18'
N37°36.28'/W122°11.81'
N37°48.46'/W122°11.95'
N37°29.56'/W121°56.58'
N37°38.00'/W122°32.07'
N37°17.33'/W121°56.01'
N37°15.26'/W122°02.33'
N37°24.75'/W122°14.35'
N37°54.45'/W122°40.41'
N37°34.85'/W121°53.23'
N37°13.93'/W121°41.35'
N37°53.78'/W122°04.30'
N37°30.28'/W122°10.00'
N37°30.88'/W122°12.26'

TAMPA/ORLANDO TERMINAL AREA CHART/FLYWAY CHART

VPBOV
VPCNY
VPDAD
VPDFI
VPDUT
VPEAR
VPFFU
VPGPE
VPHUC
VPKER
VPLEV
VPLJA

DADE CITY

CLEARWATER BEACH

ST PETE BEACH

LAKE PARKER

N27°57.00'/W080°46.75'
N28°30.00'/W080°45.00'
N28°22.57'/W082°11.25'
N29°00.17'/W081°20.85'
N27°37.70'/W082°09.10'
N27°58.67'/W082°49.83'
N28°57.08'/W081°00.33'
N27°43.50'/W082°44.67'
N28°19.87'/W082°43.77'
N28°04.00'/W081°56.00'
N28°48.00'/W080°52.00'
N29°00.00'/W080°51.00'

WASHINGTON SECTIONAL CHART

VPACE
VPAXI
VPBRA
VPGCE
VPWZO

N38°07.82'/W076°48.75'
N38°34.57'/W076°20.38'
N36°13.75'/W076°08.08'
N36°03.90'/W076°36.42'
N36°00.87'/W075°40.07'

VOR RECEIVER CHECKPOINTS AND VOR TEST FACILITIES (VOT)

The use of VOR airborne and ground checkpoints is explained in Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

NOTE: Under columns headed "Type of Checkpoint" & "Type of VOT Facility" G stands for ground. A/ stands for airborne followed by figures (2300) or (1000–3000) indicating the altitudes above mean sea level at which the check should be conducted. Facilities are listed in alphabetical order, in the state where the checkpoints or VOTs are located.

IDAHO

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Boise	113.3/BOI	A/5000	090	6.2	Over dam outlet S end Lucky Peak Reservoir
Boise (Boise Air Terminal–Gowen Field).....	113.3/BOI	G	275	1.0	On twy C adjacent to the intersection of Twy B at apch end Rwy 28L.
Coeur D'Alene	108.8/COE	A/4000	011	9.0	Over amusement park.
Idaho Falls (Idaho Falls Rgnl).....	113.85/IDA	G	208		At intersection of Twys A and A3.
Nez Perce (Lewiston–Nez Perce County).....	108.2/MQG	A/3000	247	6.2	Over tetrahedron on arpt.
Pocatello (Pocatello Rgnl)	112.6/PIH	A/5800	034	8.7	Over radio antenna with white storage tanks at base.
Twin Falls (Joslin Fld–Magic Valley Rgnl)	115.8/TWF	G	065	0.8	On runup area at apch end Rwy 25.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Boise (Boise Air Terminal–Gowen Field)....	116.7	G	

MONTANA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Billings	114.5/BIL	A/5000	199	10.5	Over refinery at Laurel.
Bozeman (Gallatin Fld)	112.4/BZN	G	272	0.5	Twy at apch end Rwy 12.
	112.4/BZN	G	137	1.0	On runup as at apch end Rwy 30.
Coppertown (Bert Mooney).....	111.6/CPN	A/6600	098	11.5	Over intersection of Rwy 11–29 and 15–33.
Dillon	113.0/DLN	A/7000	245	5.0	Over letter 'B' on bluff.
Great Falls (Great Falls Intl)	115.1/GTF	G	030	2.3	On Twy A between A5 and A6.
	115.1/GTF	G	030	2.9	At intersection of Twy A and A3.
Havre	111.8/HVR	A/4000	278	8.0	Over S end of dam.
Helena (Helena Rgnl).....	117.7/HLN	G	238	0.7	On Twy E on South side of Rwy 27.
Kalispell (Glacier Park Intl)	108.4/FCA	A/4000	316	6.4	Over apch end Rwy 30.

262

VOR RECEIVER CHECK

		Type Check Pt. Gnd.	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Facility Name (Arpt Name)	Freq/Ident	AB/ALT			
Lewistown (Lewistown Muni)	112.0/LWT	A/5200	075	5.6	Over apch end Rwy 07.
Livingston	116.1/LVM	A/6500	237	5.5	Over northern most radio twr NE of city.
Miles City (Frank Wiley Field)	112.1/MLS	G	036	4.2	On twy leading to Rwy 30.
Missoula (Missoula Intl).....	112.8/MSO	G	344	0.6	Terminal ramp east of Twy D.

OREGON

VOR RECEIVER CHECKPOINTS

		Type Check Pt. Gnd.	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Facility Name (Arpt Name)	Freq/Ident	AB/ALT			
Astoria (Astoria Regional)	114.0/AST	G	153	.5	East edge of ramp in front of large hangar.
Baker	115.3/BKE	A/6000	136	6.7	Over microwave tower on bluff.
Corvallis (Corvallis Muni)	115.4/CVO	G	049	0.5	On S edge of terminal ramp.
Eugene (Mahlon Sweet Field)	112.9/EUG	G	071	0.5	On ramp immediately W of tower.
Klamath Falls (Klamath Falls).....	115.9/LMT	G	298	1.0	On ramp N of Twy E.
North Bend (North Bend Muni).....	112.1/OTH	G	254	3.1	On Twy E at compass rose
Pendleton (Eastern Oregon Rgnl At Pendleton)	114.7/PDT	G	073	3.9	On twy B.
Rogue Valley (Rogue Valley Intl)	113.6/OED	A/3000	213	4.8	Over radio tower.
Roseburg (Roseburg Rgnl)	108.2/RBG	A/2500	337	3.0	Over S end of Rwy 16–34.
Wildhorse	113.8/ILR	A/6500	225	6.0	Over smoke stack.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Portland Intl	111.0	G	Unusable on Twy A–6, hangar area W of Twy A–6 and Twy A NW of Twy C.
Portland Hillsboro	115.2	G	
Rogue Valley Intl–Medford	117.2	G	

WASHINGTON

VOR RECEIVER CHECKPOINTS

		Type Check Pt. Gnd.	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Facility Name (Arpt Name)	Freq/Ident	AB/ALT			
Ellensburg (Bowers Field)	117.9/ELN	A/2300	255	3.5	Over W end of Rwy 07–25.
Ephrata (Ephrata Muni).....	112.6/EPH	A/2300	202	5.8	Over Rwy 03 thld.
Hoquiam (Bowerman)	117.7/HQM	A/1100	062	8.4	Over centerline on apch end Rwy 06.
Whatcom (Bellingham Intl)	113.0/HUH	A/1700	162	5.4	Over Nooksack River/Interstate 5 Bridge.

NW. 23 SEP 2010 to 18 NOV 2010

VOR RECEIVER CHECK					263
Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Moses Lake (Grant County Intl)	115.0/MWH	G	155	1.4	On runup area Rwy 32R.
	115.0/MWH	G	194	1.2	On runup area Rwy 04.
	115.0/MWH	G	313	1.0	On runup area Rwy 14L.
Olympia (Olympia Rgnl)	113.4/OLM	G	350	0.3	On E runup area Rwy 17.
Paine (Snohomish Co (Paine Fld))	110.6/PAE	G	173	0.8	Intersection of Rwy 11 and
					Twy H.
Pasco (Tri-Cities).....	108.4/PSC	G	098	1.1	On Twy A–7.
					Twy Echo at Rwy 30 run-up
Seattle	116.8/SEA	A/2000	197	27.0	area.
Seattle	116.8/SEA	A/2500	308	19.5	Over Nisqually
Seattle (Crest Airpark)	116.8/SEA	A/2000	107	10.3	bridge.
Tatoosh (Sekiu)	112.2/TOU	A/2500	077	12.4	Over NW end of bridge and
Walla Walla (Martin Field)	116.4/ALW	A/1500	225	5.6	Hwy 305.
Walla Walla (Walla Walla Rgnl).....	116.4/ALW	G	035	0.5	Over centerline on apch
Wenatchee (Pangborn Mem).....	111.0/EAT	G	105	0.6	end Rwy 33.
Yakima	116.0/YKM	A/3500	210	4.1	Over AER 08.
					At the intersection of Twys
					A and C.
					On Twy at apch end of Rwy
					30.
					Over single tower on ridge
					line.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Seattle (Boeing Field/King County Intl)	108.6	G	
Seattle (Seattle Tacoma Intl)	117.5	G	
Spokane (Felts Field).....	114.0	G	
Spokane Intl	109.6	G	

WYOMING

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Boysen Reservoir	117.8/BOY	A/6500	180	25	Over Riverton VOR.
Jackson (Jackson Hole)	115.4/JAC	G	174	0.5	On Twy A, approximately 1,000’ S of AER 19.
Muddy Mountain (Casper/Natrona Co Intl) ..	116.2/DDY	A/6400	204	13.4	Over intersection Rwys 03–21, 08–26 and 12–30.
Newcastle (Mondell Fld).....	108.2 ECS	A/5500	116	4.9	Over radio towers with strobe lights.
Rawlins (Rawlins Muni)	109.4/RWL	A/7500	093	5.5	Bridge over railroad track east of refinery.
Rock Springs (Rock Springs–Sweetwater County).....	109.4/RWL	G	052	0.8	Runup area Rwy 22.
	116.0/OCS	G	270	2.3	Intersection twy to Rwy 09–27.
Sheridan (Sheridan County).....	115.3/SHR	A/5000	129	5.0	Over centerline approach end Rwy 14.

The following tabulation lists all reported parachute jumping sites in the area of coverage of this directory. Unless otherwise indicated, all activities are conducted during daylight hours and under VFR conditions. The busiest periods of activity are normally on weekends and holidays, but jumps can be expected at anytime during the week at the locations listed. Jumps within restricted airspace are not listed.

All times are local and altitudes MSL unless otherwise specified.

Contact facility and frequency is listed at the end of the remarks, when available, in bold face type.

Refer to Federal Aviation Regulations Part 105 for required procedures relating to parachute jumping.

Organizations desiring listing of their jumping activities in this publication should contact the nearest FSS, tower or ARTCC.

Qualified parachute jumping sites will be depicted on the appropriate visual chart(s).

Note: (c) in this publication indicates that the parachute jump area is charted.

To qualify for charting, a jump area must meet the following criteria:

- (1) Been in operation for at least 1 year.
- (2) Operate year round (at least on weekends).
- (3) Log 4,000 or more jumps each year.

In addition, jump sites can be nominated by FAA Regions if special circumstances require charting.

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
IDAHO			
Burley	13 NM; 035° Burley.....	15,000	Daily SR-SS.
(c) Caldwell Industrial Arpt.....	20 NM; 269° Boise	17,500	5 NM radius. 1/2 hour before SR hour after SS.
Joslin Fld-Magic Valley Rgnl	0.1 NM; 359° Twin Falls	14,500	2 NM radius May-Oct weekends
(c) Star Skydiving Center.....	17 NM; 289° Boise	16,000	5NM radius. SR-2 hrs after SS daily.
MONTANA			
Bozeman Gallatin Fld Arpt.....	1 NM; 038° Bozeman	15,000	2 NM radius. SR-SS daily.
(c) Butler Creek	19 NM; 296° Missoula	2,000 AGL	0.5 NM radius. Occasional use.
Dornblaser Fld.....	5.2 NM; 120° Missoula	12,500 AGL	0.5 NM radius. Occasional use.
(c) Grant Creek	1.5 NM; 053° Missoula	12,500 AGL	0.5 NM radius. Occasional use.
(c) Helena, Ft Harrison	6 NM; 265° Helena	12,000	1 NM radius. Wed-Sun SR-SS.
Kalispell.....	6 NM; 227° Kalispell	14,000	1 NM radius. 0900-SS daily.
(c) Kalispell, Carson Fld Arpt.....	28 NM; 238° Kalispell	14,000	2 NM radius. 0800-SS daily.
Kalispell, City Arpt.....	6 NM; 230° Kalispell	14,000 AGL	2 NM radius. 0800-SS daily.
(c) Laurel Muni Arpt	9 NM; 208° Billings	14,500	2 NM radius. Daily SR-SS.
Livingston, Mission Fld.....	1 NM; 010° Livingston	14,500	2 NM radius. Daily SR-SS.
(c) Missoula Intl Arpt	1.4 NM; 315° Missoula	1,500 AGL	0.5 NM radius. May-Sep daily SR-SS, Oct-Apr occasional use.
Nine Mile R.S.	17 NM; 289° Missoula	2,000 AGL	0.5 NM radius. Occasional use.
(c) Raser Ranch	2 NM; 357° Missoula	3,000 AGL	0.5 NM radius Apr-Oct occasion use.
Roundup Arpt.....	40 NM; 351° Billings	14,500	Weekends SR-SS.
(c) Six Mile	15 NM; 300° Missoula	2,000 AGL	0.5 NM radius. Occasional use.
(c) Stevensville Arpt.....	25 NM; 162° Missoula	14,000	1 NM radius. Wed and weekends SR-SS.
Stoney Creek.....	17 NM; 296° Missoula	2,000 AGL	0.5 NM radius. Occasional use.
Three Forks Arpt	18 NM; 275° Bozeman	14,500	2 NM radius. Daily SR-SS.
University Campus.....	5 NM; 108° Missoula	12,500 AGL	0.5 NM radius. Occasional use.
West Yellowstone, Yellowstone Arpt.....	60 NM; 034° DuBois	1,500 AGL	June-Sep.
OREGON			
(c) Albany, Northwest Parachute Club	18 NM; 032° Corvallis	13,000	2 NM radius. SR-1 hr after SS Wed-Sun. Occasional hours Mon-Tue.
(c) Creswell, Hobby Fld.....	15 NM; 120° Eugene	15,000	5 NM radius. SR-SS daily.
(c) Estacada, Beaver Oaks Arpt.....	25 NM; 076° Newberg	13,000 AGL	1.5 NM radius. 0800-2300 Daily
(c) Hermiston Muni Arpt.....	16 NM; 280° Pendleton	15,000	2 NM radius. SR-SS weekends. Occasional hours weekdays.
(c) Medford, Beagle Sky Ranch Arpt.....	5 NM; 350° Rogue Valley	14,000	Daily SR-2200.
(c) Mollala, Sky Dive Oregon Arpt.....	19 NM; 110° Newberg	14,500	5 NM radius. 0800-2200, Daily. Portland Intl Tower 118.1
(c) Redmond, Cline Falls Air Park Arpt....	3 NM; 010° Deschutes	13,000	3 NM radius. 0800-2100.

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
WASHINGTON			
Coupeville NOLF.....	5 NM; 110° Penn Cove	12,500 AGL	2 NM radius. Occasional use.
Fort Lewis, Abrams Drop Zone	7.5 NM; 200° McChord	10,000	1 NM radius. Occasional use.
Fort Lewis, Anzio Drop Zone.....	9 NM; 160° McChord	10,000	0.3 NM radius. Occasional use.
Fort Lewis, Dakto Drop Zone.....	7.5 NM; 175° McChord	10,000	0.3 NM radius. Occasional use.
Fort Lewis, Darby Drop Zone.....	8.5 NM; 097° Olympia	10,000	0.5 NM radius. Occasional use.
Fort Lewis, El Guettar Drop Zone.....	7.5 NM; 092° Olympia	10,000	0.3 NM radius. Occasional use.
Fort Lewis, Gray AAF (Joint Base Lewis-McChord) Drop Zone	6 NM; 210° McChord	10,000	1 NM radius. Occasional use.
Fort Lewis, Marion Drop Zone	11 NM; 190° McChord.....	10,000	1 NM radius. Occasional use.
Fort Lewis, Merrill Drop Zone.....	9 NM; 092° Olympia	10,000	0.5 NM radius. Occasional use.
Fort Lewis, Mytkina Drop Zone.....	10 NM; 065° Olympia	10,000	1 NM radius. Occasional use.
Fort Lewis, Point Salinas Drop Zone....	7.5 NM; 201° McChord	10,000	1 NM radius. Occasional use.
Fort Lewis, Pointe De Hoc Drop Zone..	11.5 NM; 192° McChord.....	10,000	0.25 NM radius. Occasional use.
Fort Lewis, Rogers Drop Zone.....	7 NM; 155° McChord.....	10,000	0.5 NM radius. Occasional use.
Fort Lewis, Solo Drop Zone	6.5 NM; 245° McChord	10,000	1 NM radius. Occasional use.
Kennewick, Vista Field.....	5.1 NM; 217° Pasco.....	14,500	1 NM radius. SR-SS weekends, 1700-SS weekdays, Apr-Nov.
(c) Larson Drop Zone.....	17 NM; 217° Moses Lake	3,000	Continuous. Personnel and hvy equip. Grant Co Intl Tower 126.4
Monroe, Firstair Fld.....	14 NM; 091° Paine	12,500	0.5 mi radius. Daily SR-SS.
(c) Richland Arpt.....	8 NM; 270° Pasco.....	13,000	2 NM radius. Continuous.
(c) Ritzville, West Plains Skydiving Drop Zone	36.4 NM; 207° Spokane	15,000	2 NM radius. SR-SS weekends, 1700-SS weekdays. Heavy use Apr-Nov.
(c) Shelton, Sanderson Fld Arpt	19 NM; 309° Olympia	14,000	2 NM radius. Daily 0800-2300.
(c) Snohomish, Harvey Fld.....	7 NM; 078° Paine	15,000	2 NM radius. Continuous.
(c) Snohomish, Harvey Fld.....	8 NM; 075° Paine	15,000	1 NM radius. Continuous.
(c) Spokane, Hayford Drop Zone	12 NM; 340° Spokane	10,000	0.5 NM radius. Occasional use.
(c) Tacoma, McChord Field (Joint Base Lewis-McChord).....	28 NM, 181° Seattle	15,000	Weekends and occasional nights.
(c) Tekoa, Willard Fld	31 NM; 110° Spokane.....	12,500	1 NM radius. Daily.
(c) Toledo, Ed Carlson Mem Fld-South Lewis Co	30 NM; 150° Olympia	12,500	5 NM radius. Continuous.

The purpose of this bulletin is to provide major changes in aeronautical information that have occurred since the last publication date of each Sectional Aeronautical, VFR Terminal Area, and Helicopter Route Charts listed. The general policy is to include only those changes to controlled airspace and special use airspace that present a hazardous condition or impose a restriction on the pilot, and major changes to airports and radio navigational facilities, thereby providing the VFR pilot with the essential data necessary to update and maintain chart currency. The data is grouped by type and then by effective date. When a new edition of the Aeronautical Chart is published, the corrective tabulation will be removed from this bulletin. Inasmuch as this Bulletin provides major changes only, pilots should consult the airport listing in this directory for all new information. Users of U.S. World Aeronautical Charts (WAC) and U.S. Gulf Coast VFR Aeronautical Charts should consult the appropriate Sectional and VFR Terminal Area Charts for revisions.

Military Training Routes (MTRs) are shown on Sectional Aeronautical Charts, VFR Terminal Area, and Helicopter Route Charts. Only the route centerline, direction of flight and the route designator are shown — route widths and altitudes are not shown. Since these routes are subject to change every 56 days and the charts are reissued generally every 6 months, routes with a change in the alignment of the charted route centerline will be listed in this Aeronautical Chart Bulletin below. You are advised to contact the nearest FSS for route dimensions and current status for those routes affecting your flight.

BILLINGS SECTIONAL

80th Edition, 26 Aug 2010

OBSTRUCTIONS

23 Sep 2010 Add obst 2638'MSL (389'AGL), 47°57'08"N, 101°16'31"W.
 Add obst 2629'MSL (389'AGL), 47°56'37"N, 101°17'17"W.
 Add obst 2336'MSL (315'AGL), 47°29'22"N, 101°28'56"W.

AIRPORTS

23 Sep 2010 No Major Changes.

NAVAIDS

23 Sep 2010 No Major Changes.

AIRSPACE

23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

23 Sep 2010 No Major Changes.

MISCELLANEOUS

23 Sep 2010 No Major Changes.

CHEYENNE SECTIONAL

82nd Edition, 29 Jul 2010

OBSTRUCTIONS

29 Jul 2010 No Major Changes.
23 Sep 2010 Add obst 2890'MSL (349'AGL), 44°04'38"N, 102°26'47"W.

AIRPORTS

29 Jul 2010 No Major Changes.
23 Sep 2010 Delete ARTHUR arpt, 41°33'42"N, 101°42'41"W.
 Delete GRANBY SPORTS ultralight flight park, 40°02'55"N, 105°56'18"W.

NAVAIDS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

AIRSPACE

29 Jul 2010 – 23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

29 Jul 2010 – 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

29 Jul 2010 – 23 Sep 2010 No Major Changes.

MISCELLANEOUS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

GREAT FALLS SECTIONAL

79th Edition, 1 Jul 2010

OBSTRUCTIONS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

AIRPORTS

29 Jul 2010 No Major Changes.

23 Sep 2010 Delete SPENCER arpt, 45°50'19"N, 116°39'33"W.

Delete BEACON STAR arpt, 46°58'20"N, 109°36'49"W.

NAVAIDS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

AIRSPACE

29 Jul 2010 Revise WEST YELLOWSTONE, MT Class E: That airspace extending upward from 700 feet above the surface within 4.3 miles west and 8.3 miles east of the 026° and 206° bearings of the Yellowstone Airport extending from 8.3 miles northeast to 23.3 miles southwest of the Yellowstone Airport; that airspace extending upward from 1,200 feet above the surface within 4.3 miles each side of the 209° bearing from 44°34'32"N, 111°11'51"W extending to 36.2 miles southwest, and within 5 miles north and 4.3 miles south of the 304° bearing from 44°34'32"N, 111°11'51"W extending to the east edge of V-343; that airspace extending upward from 10,700 feet MSL within a 25.3-mile radius of 44°34'32"N, 111°11'51"W extending clockwise from the 081° bearing from 44°34'32"N, 111°11'51"W to 4.3 miles east of the 236° bearing from 44°34'32"N, 111°11'51"W, and within 4.3 miles each side of the 236° bearing from 44°34'32"N, 111°11'51"W extending to 43.5 miles southwest; that airspace extending upward from 10,700 feet MSL within 9 miles south and 5 miles north of the 304° bearing from 44°34'32"N, 111°11'51"W extending to the east edge of V-343; that airspace extending upward from 12,000 feet MSL within a 30.5-mile radius of 44°34'32"N, 111°11'51"W extending clockwise from the 026° bearing from 44°34'32"N, 111°11'51"W to the 081° bearing from 44°34'32"N, 111°11'51"W; that airspace extending upward from 12,500 feet MSL within 4.3 miles each side of the 293°, 329° and 043° bearing from 45°00'19"N, 110°53'49"W extending to 25.16 miles west to 30.57 miles northwest to 54.24 miles north, and within 4.3 miles each side of the 312° bearing from 44°31'10"N, 111°14'03"W extending to 25.20 miles northwest, excluding that portion that overlies the east edge of V-343 and south edge of V-2 and V-86; that airspace extending upward from 13,000 feet MSL, within a 30.5-mile radius of 44°34'32"N, 111°11'51"W extending clockwise from the 313° bearing to the 026° bearing from 44°34'32"N, 111°11'51"W excluding that portion that overlies V-298 and V-343. This Class E airspace area shall be effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.

Add BONNERS FERRY, ID Class E: That airspace extending upward from 700 feet above the surface within a 5-mile radius of Boundary County Airport, Bonners Ferry, ID.

23 Sep 2010 Revise BOZEMAN, MT Class E: That airspace extending upward from the surface within 3 miles each side of the 316° bearing of Gallatin Field Airport, extending from the 4.4-mile radius of the airport to 14 miles northwest of Gallatin Field Airport; and that airspace 2.4 miles each side of the 212° bearing of the Gallatin Field Airport, extending from the 4.4-mile radius of the airport to 7 miles northwest of Gallatin Field Airport.

Revise BOZEMAN, MT Class E: That airspace extending upward from 700 feet above the surface within a 13.5-mile radius of Gallatin Field Airport, and within 4.8 miles northeast and 13 miles southwest of the 316° bearing of the airport extending from the 13.5-mile radius to 24.4 miles northwest of Gallatin Field Airport.

SPECIAL USE AIRSPACE

29 Jul 2010 – 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

29 Jul 2010 No Major Changes.

23 Sep 2010 IR 479 Revised.

MISCELLANEOUS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

KLAMATH FALLS SECTIONAL
83rd Edition, 23 Sep 2010**OBSTRUCTIONS****23 Sep 2010** No Major Changes.**AIRPORTS****23 Sep 2010** No Major Changes.**NAVAIDS****23 Sep 2010** No Major Changes.**AIRSPACE****23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****23 Sep 2010** No Major Changes.**MISCELLANEOUS****23 Sep 2010** No Major Changes.

SALT LAKE CITY HELICOPTER ROUTE CHART
3rd Edition, 26 Oct 2006**OBSTRUCTIONS****23 Nov 2006 – 23 Sep 2010** No Major Changes.**AIRPORTS****23 Nov 2006 – 10 Apr 2008** No Major Changes.**5 Jun 2008** Delete PAYNE arpt, 41°05'54"N, 112°06'56"W.

Delete WARD heli, 40°35'59"N, 111°48'03"W.

31 Jul 2008 – 25 Sep 2008 No Major Changes.**20 Nov 2008** Delete CHANNEL 4 heli, 40°43'57"N, 111°57'20"W.**15 Jan 2009 – 3 Jun 2010** No Major Changes.**29 Jul 2010** CAMP WILLIAMS ANG arpt abandoned, 40°25'55"N, 111°55'51"W.**23 Sep 2010** No Major Changes.**NAVAIDS****23 Nov 2006 – 23 Sep 2010** No Major Changes.**AIRSPACE****23 Nov 2006 – 23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****23 Nov 2006 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****23 Nov 2006 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****23 Nov 2006 – 23 Sep 2010** No Major Changes.

SALT LAKE CITY SECTIONAL
83rd Edition, 8 Apr 2010**OBSTRUCTIONS****8 Apr 2010 – 23 Sep 2010** No Major Changes.**AIRPORTS****8 Apr 2010 – 3 Jun 2010** No Major Changes.**29 Jul 2010** CAMP WILLIAMS ANG arpt abandoned, 40°25'55"N, 111°55'51"W.**23 Sep 2010** No Major Changes.**NAVAIDS****8 Apr 2010** No Major Changes.**3 Jun 2010** Delete ARCO NDB, 43°35'57"N, 113°20'32"W.

Delete LOGAN VOR-DME, 41°50'39"N, 111°51'55"W.

29 Jul 2010 – 23 Sep 2010 No Major Changes.**AIRSPACE****8 Apr 2010** No Major Changes.**3 Jun 2010** Add BATTLE MOUNTAIN, NV Class E: Within a 4.2-mile radius of Battle Mountain Airport, and within 1.4 miles each side of the 218° bearing extending from the 4.2-mile radius to 7.4 miles southwest of the Battle Mountain Airport. This Class E airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.**29 Jul 2010** Revise WEST YELLOWSTONE, MT Class E: That airspace extending upward from 700 feet above the surface within 4.3 miles west and 8.3 miles east of the 026° and 206° bearings of the Yellowstone Airport extending from 8.3 miles northeast to 23.3 miles southwest of the Yellowstone Airport; that airspace extending upward from 1,200 feet above the surface within 4.3 miles each side of the 209° bearing from 44°34'32"N, 111°11'51"W extending to 36.2 miles southwest, and within 5 miles north and 4.3 miles south of the 304° bearing from 44°34'32"N, 111°11'51"W extending to the east edge of V-343; that airspace extending upward from 10,700 feet MSL within a 25.3-mile radius of 44°34'32"N, 111°11'51"W extending clockwise from the 081° bearing from 44°34'32"N, 111°11'51"W to 4.3 miles east of the 236° bearing from 44°34'32"N, 111°11'51"W, and within 4.3 miles each side of the 236° bearing from 44°34'32"N, 111°11'51"W extending to 43.5 miles southwest; that airspace extending upward from 10,700 feet MSL within 9 miles south and 5 miles north of the 304° bearing from 44°34'32"N, 111°11'51"W extending to the east edge of V-343; that airspace extending upward from 12,000 feet MSL within a 30.5-mile radius of 44°34'32"N, 111°11'51"W extending clockwise from the 026° bearing from 44°34'32"N, 111°11'51"W to the 081° bearing from 44°34'32"N, 111°11'51"W; that airspace extending upward from 12,500 feet MSL within 4.3 miles each side of the 293°, 329° and 043° bearing from 45°00'19"N, 110°53'49"W extending to 25.16 miles west to 30.57 miles northwest to 54.24 miles north, and within 4.3 miles each side of the 312° bearing from 44°31'10"N, 111°14'03"W extending to 25.20 miles northwest, excluding that portion that overlies the east edge of V-343 and south edge of V-2 and V-86; that airspace extending upward from 13,000 feet MSL, within a 30.5-mile radius of 44°34'32"N, 111°11'51"W extending clockwise from the 313° bearing to the 026° bearing from 44°34'32"N, 111°11'51"W excluding that portion that overlies V-298 and V-343. This Class E airspace area shall be effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.**23 Sep 2010** Revise LUCIN, UT Class E: That airspace extending upward from 1,200 feet above the surface bounded on the west by V-269; on the east by V-484; and on the south by V-32; excluding existing controlled airspace 8,500 feet MSL and above; excluding that airspace designated for federal airways; excluding the portions within Restricted Area R-6404 and Lucin MOA during their published hours of designation.

Establish KEMMERER, WY Class E: Within a 4.3-mile radius of the Kemmerer Municipal Airport, and within 1 mile each side of the 360° bearing from the airport, extending from the 4.3-mile radius to 7 miles north of the airport. This Class E airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.

SPECIAL USE AIRSPACE**8 Apr 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****8 Apr 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****8 Apr 2010 – 23 Sep 2010** No Major Changes.

SALT LAKE CITY TERMINAL AREA CHART**42nd Edition, 8 Apr 2010****OBSTRUCTIONS****8 Apr 2010 – 23 Sep 2010** No Major Changes.**AIRPORTS****8 Apr 2010 – 3 Jun 2010** No Major Changes.**29 Jul 2010** CAMP WILLIAMS ANG arpt abandoned, 40°25'55"N, 111°55'51"W.**23 Sep 2010** No Major Changes.**NAVAIDS****8 Apr 2010 – 23 Sep 2010** No Major Changes.**AIRSPACE****8 Apr 2010 – 29 Jul 2010** No Major Changes.**23 Sep 2010** Revise LUCIN, UT Class E: That airspace extending upward from 1,200 feet above the surface bounded on the west by V-269; on the east by V-484; and on the south by V-32; excluding existing controlled airspace 8,500 feet MSL and above; excluding that airspace designated for federal airways; excluding the portions within Restricted Area R-6404 and Lucin MOA during their published hours of designation.**SPECIAL USE AIRSPACE****8 Apr 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****8 Apr 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****8 Apr 2010 – 23 Sep 2010** No Major Changes.**SEATTLE SECTIONAL****79th Edition, 3 Jun 2010****OBSTRUCTIONS****3 Jun 2010** No Major Changes.**29 Jul 2010** Add obst 2919' MSL (389' AGL) UC, 46°57'20"N, 120°12'56"W.

Change obst from 2816' MSL (255' AGL) to 2938' MSL (389' AGL), 46°57'13"N, 120°12'50"W.

Add obst 760' MSL (389' AGL), 46°47'38"N, 124°04'07"W.

23 Sep 2010 Add obst 829' MSL (389' AGL), 46°47'29"N, 124°03'44"W.**AIRPORTS****3 Jun 2010** No Major Changes.**29 Jul 2010** Delete KENT arpt, 46°52'24"N, 119°07'49"W.

Delete COUGAR FLAT arpt, 46°17'33"N, 122°57'01"W.

23 Sep 2010 Delete SPENCER arpt, 45°50'20"N, 116°39'34"W.

Delete BARRETT arpt, 45°49'16"N, 118°29'53"W.

Add RP35 to TACOMA NARROWS arpt, 47°16'05"N, 122°34'41"W.

NAVAIDS**3 Jun 2010** No Major Changes.**29 Jul 2010** Change DEER PARK NDB freq from 216 to 365, 47°58'04"N, 117°25'35"W.

Add CANYON NDB, freq 388, ident (CRK) 47°40'37"N, 117°27'00"W.

23 Sep 2010 No Major Changes.**AIRSPACE****3 Jun 2010** No Major Changes.**29 Jul 2010** Add BONNERS FERRY, ID Class E: That airspace extending upward from 700 feet above the surface within a 5-mile radius of Boundary County Airport, Bonners Ferry, ID.**23 Sep 2010** Revise VANCOUVER FLIGHT INFORMATION REGION, SOUTH VANCOUVER ISLAND, BC CONTROL AREA EXTENSION: The airspace from 700 ' AGL within the area bounded by a line beginning at 48°17'48"N, 124°00'43"W Vancouver FIR boundary to 48°40'58"N, 124°00'43"W thence counter-clockwise along the arc of a circle of 45 miles radius centered on 49°11'42"N, 123°10'55"W to 48°30'45"N, 123°38'59"W to 48°22'19"N, 123°29'12"W thence counter-clockwise along the arc of a circle of 5 miles radius centered on 48°25'22"N, 123°23'15"W to 48°20'53"N, 123°26'34"W to 48°17'03"N, 123°14'54"W thence westerly along the Vancouver FIR boundary to 48°17'48"N, 124°00'43"W point of beginning.

Revise VANCOUVER FLIGHT INFORMATION REGION, SOUTH VANCOUVER ISLAND, BC CONTROL AREA EXTENSION: The airspace 1,600 ' AGL to 12,500 ' within the area bounded by a line beginning at 48°17'48"N, 124°00'43"W thence westerly along the Vancouver FIR boundary to 48°29'36"N, 124°43'38"W to 48°47'13"N, 125°12'39"W thence counter-clockwise along the arc of a circle of 25 miles radius centered on 49°02'49"N, 125°42'15"W to 49°10'45"N, 125°06'11"W thence counter-clockwise along the arc of a circle of 35 miles radius centered on 49°45'14"N, 124°57'29"W to 49°15'10"N, 124°30'06"W thence northeasterly along the Comox, BC MTCA boundary to 49°19'04"N, 124°18'39"W thence counter-clockwise along the arc of a circle of 45 miles radius centered on 49°11'42"N, 123°10'55"W to 48°40'58"N, 124°00'43"W to 48°17'48"N, 124°00'43"W point of beginning.

CONTINUED ON NEXT PAGE**NW. 23 SEP 2010 to 18 NOV 2010**

CONTINUED FROM PRECEDING PAGE

Revise KELSO, WA Class E: That airspace extending upward from 700 feet above the surface within a 6.4-mile radius of the Southwest Washington Regional Airport, and 2.4 miles each side of the 290° bearing of the airport extending 9.1 miles west, and 4.3 miles each side of the 337° bearing of the airport extending 22.2 miles northwest, and 5.8 miles west and 3 miles east of the 012° bearing of the airport extending 18.2 miles north of the airport.

SPECIAL USE AIRSPACE

3 Jun 2010 – 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

3 Jun 2010 – 23 Sep 2010 No Major Changes.

MISCELLANEOUS

3 Jun 2010 – 23 Sep 2010 No Major Changes.

SEATTLE TERMINAL AREA CHART**74th Edition, 3 Jun 2010****OBSTRUCTIONS**

3 Jun 2010 – 23 Sep 2010 No Major Changes.

AIRPORTS

3 Jun 2010 – 29 Jul 2010 No Major Changes.

23 Sep 2010 Add RP35 to TACOMA NARROWS arpt, 47°16'05"N, 122°34'41"W.

NAVAIDS

3 Jun 2010 – 23 Sep 2010 No Major Changes.

AIRSPACE

3 Jun 2010 – 23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

3 Jun 2010 – 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

3 Jun 2010 – 23 Sep 2010 No Major Changes.

MISCELLANEOUS

3 Jun 2010 – 23 Sep 2010 No Major Changes.

SUPPLEMENTAL COMMUNICATION REFERENCE

Contained within this tabulation, and listed alphabetically by airport name, are all private-use airports charted on the U.S. IFR Enroute Low and High Altitude charts in the United States, having terminal approach and departure control facilities. Additionally, listed by country, are all Canadian and Mexican airports that appear on the U.S. IFR Enroute charts with approach and departure control services. All frequencies transmit and receive unless otherwise noted. Radials defining sectors are outbound from the facility.

UNITED STATES

FACILITY NAME	CHART & PANEL
Frankfort, IL (LL40) Chicago App/Dep Con 133.1 285.6	L-28H
Glasgow Industrial, MT (Ø7MT) Salt Lake Center App/Dep Con 126.85 305.2	H-1E, 2F, L-13D
USAF Academy Bullseye Aux Airstrip, CO (C09Ø) ASOS 118.325	L-10F
West Kentucky Airport, KY (5KY3) Memphis Center App/Dep Con 133.65 292.15	L-16I
William P Gwinn, FL (Ø6FA) Gwinn Tower 120.4 279.25 (Mon-Fri 1300-2100Z‡) Gnd Con 121.65 279.25	H-8I, L-23C

CANADA

FACILITY NAME	CHART & PANEL
Abbotsford, BC (CYXX) ATIS 119.8 (1500-Ø700Z‡) Victoria Trml App/Dep Con 132.7 (Avbl on ground) 290.8 Tower 119.4 (Inner) 121.0 (Outer) 295.0 (1500-Ø700Z‡) Gnd Con 121.8 MF 119.4 295.0 (Ø700-1500Z‡) (Shape irregular to 4500')	H-1B, L-12F
Amos/Magny, QC (CYEY) Montreal Center App/Dep Con 125.9	H-11B
Atikokan Muni, ON (CYIB) MF 122.3 (5 NM to 4500' No ground station)	L-14I
Barrie-Orillia (Lake Simcoe Rgnl), ON (CYLS) AWOS 122.55 (Pvt) Toronto Center App/Dep Con 124.025	H-11B, L-31D
Bar River, ON (CPF2) Toronto Center App/Dep Con 132.65	L-31C
Bathurst, NB (CZBF) Moncton Center App/Dep Con 134.25	L-32J
Boundary Bay, BC (CZBB) ATIS 125.5 (1500-Ø700Z‡) Vancouver App/Dep Con 132.3 363.8 Tower 118.1 (Inner) 127.6 (Outer) (1500-Ø700Z‡) Gnd Con 124.3 MF 118.1 (Ø700-1500Z‡ to 2000'. Vancouver Trml 125.2 above 2000'. Shape irregular to 2500'.)	H-1B, L-1E
Brampton, ON (CNC3) Toronto Trml App/Dep Con 119.3 253.1	L-31D
Brandon Muni, MB (CYBR) Winnipeg Center App/Dep Con 132.25 285.4 MF 122.1 (5 NM to 4000')	H-2H
Brantford, ON (CYFD) Toronto Trml App/Dep Con 128.27	L-31D
Brockville-Thousand Islands Rgnl Tackaberry, ON (CNL3) Montreal Center App/Dep Con 134.675	L-32G
Bromont, QC (CZBM) Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM to 3400')	L-32G
Burlington Airport, ON (CZBA) Toronto Center App/Dep Con 119.3 253.1	L-31D
Castlegar/West Kootenay Rgnl, BC (CYCG) Vancouver Center App/Dep Con 134.2 227.3 MF 122.1 (5 NM to 6500')	H-1C
Centralia/James T. Fld Muni, ON (CYCE) Toronto Center App/Dep Con 135.30	H-10G, 11B, L-31D
Charlottetown, PE (CYYG) Moncton Center App/Dep Con 135.65 384.8 MF 118.0 (5 NM to 3200')	H-11E, L-32J
Chatham-Kent, ON (CNZ3) Cleveland Center App/Dep Con 132.25	H-10G, L-30G

FACILITY NAME	CHART & PANEL
Collingwood, ON (CNY3) Toronto Center App/Dep Con 124.02	H-11B, L-31D
Cornwall Rgnl, ON (CYCC) Boston Center App/Dep Con 135.25 377.1	L-32G
Cranbrook/Canadian Rockies Intl, BC (CYXC) Vancouver Center App/Dep Con 133.6 MF 122.3 (5 NM to 6100')	H-1C
Debert, NS (CCQ3) Halifax Trml App/Dep Con 119.2	H-11E, L-32J
Digby, NS (CYID) Moncton Center App/Dep Con 123.9	L-32J
Downsview, ON (CYZD) Toronto Center App/Dep Con 133.4 MF 126.2 (1300-2300Z†, 3 NM to 1700')	H-11B, L-31E
Drummondville, QC (CSC3) Montreal Center App/Dep Con 132.35	L-32H
Earlton (Timiskaming Rgnl), ON (CYXR) MF 122.0 (5 NM to 3800') AWOS 128.6	H-11B
Elliot Lake Muni, ON (CYEL) Toronto Center App/Dep Con 135.4	L-31C
Fort Frances Muni, ON (CYAG) Minneapolis Center App/Dep Con 120.9	L-14H
Fredericton Intl, NB (CYFC) ATIS 127.55 (1045-0245Z†, OT AWOS) Moncton Center App/Dep Con 124.3 135.5 270.8 Tower 119.0 (1045-0245Z†) Gnd Con 121.7 (1045-0245Z†) MF 119.0 (0245-1045Z†, 5 NM to 3500')	H-11E, L-32I
Goderich, ON (CYGD) Toronto Center App/Dep 135.3 266.3	H-11B, L-31D
Greenwood, NS (CYZX) ATIS 128.85 244.3 (1100-0000Z†) App/Dep Con 120.6 335.9 Tower 119.5 126.2 236.6 324.3 Gnd Con 133.75 289.4 Clnc Del 128.025 283.9	H-11E, L-32J
Grimsby Air Park, ON (CNZ8) Toronto Trml App/Dep Con 128.27 268.75 Tower 125.0 308.475	L-31E
Halifax/Shearwater, NS (CYAW) ATIS 129.175 (Ltd hrs) App/Dep Con 119.2 MF Shearwater Advisory 119.0 126.2 340.2 360.2 (Ltd hrs) Gnd Con 121.7 250.1	H-11E, L-32J
Halifax/Stanfield Intl, NS (CYHZ) ATIS 121.0 Moncton Center App/Dep Con 118.7 119.2 128.55 135.3 363.8 Tower 118.4 236.6 Gnd Con 121.9 275.8 Clnc Del 123.95 Apron Advisory 122.125	H-11E, L-32J
Hamilton, ON (CYHM) ATIS 128.1 Toronto Trml App/Dep Con 128.27 268.75 Tower 119.7 125.0 Gnd Con 121.6	H-10H, 11B, L-11B
Kingston, ON (CYGK) Montreal Center App/Dep Con 135.05 398.4 (0400-1115Z†) MF 122.5 (1115-0400Z† 5 NM to 3300')	H-11C, L-31E, 32F
Kitchener/Waterloo, ON (CYKF) ATIS 125.1 (1200-0400Z†) Toronto Trml App/Dep Con 128.275 Waterloo Tower 126.0 118.55 (1200-0400Z†) Gnd Con 121.8 MF 126.0 (0400-1200Z† 5 NM to 4000')	H-11B, L-31D
Lachute, QC (CSE4) Montreal Center App Con 124.65 132.85 268.3 Montreal Center Dep Con 132.85 268.3	L-32G
La Tuque, QC (CYLQ) Montreal Center App/Dep Con 134.5	H-11C
Langley, BC (CYNJ) ATIS 124.5 (1630-0230Z, DT 1530-0330Z) Victoria Trml App/Dep Con 132.7 290.8 Tower 119.0 (1630-0230Z, DT 1530-0330Z) Gnd Con 121.9 MF 119.0 (0230-1630Z, DT 0330-1530Z 3 NM to 1900')	L-1E

FACILITY NAME	CHART & PANEL
Leamington, ON (CLM2) Cleveland Center App/Dep Con 132.45	L-30F
Lethbridge, AB (CYQL) ATIS 124.4 (1300-0545Z‡) Edmonton Center App/Dep Con 132.75 265.2 MF 121.0 (5 NM to 6000')	H-1D
Lindsay, ON (CNF4) Toronto Center App/Dep 134.25	L-31E, L-32F
Liverpool/South Shore Rgnl, NS (CYAU) Moncton Center App/Dep Con 123.9	L-32J
London, ON (CYXU) ATIS 127.8 (1120-0345Z‡) Toronto Center App/Dep 135.3 135.625 Tower 119.4 125.65 (1120-0345Z‡) Gnd Con 121.9 MF 119.4 (0345-1120Z‡ 5 NM to 3000')	H-10G, 11B, L-30G, 31D
Manitowaning/Manitoulin East Muni, ON (CYEM) Toronto Center App/Dep 135.4 260.9	L-31C
Maniwaki, QC (CYMW) Montreal Center App/Dep Con 126.57	L-32G
Mascouche, QC (CSK3) MF 122.35 (5 NM to 2500'. No gnd station. Excluding the portion S of the N shore of Riviere des Milles-Iles and 1 NM around Lac Agile Mascouche arpt.)	L-32G
Medicine Hat, AB (CYXH) AWOS 124.875 (0345-1245Z‡) MF 122.2 (1245-0345Z‡ 5 NM to 5400')	H-1D
Midland/Huronía, ON (CYEE) Toronto Center App/Dep 124.025	L-31D
Miramichi, NB (CYCH) Moncton Center App/Dep Con 123.7	H-11E, L-32J
Moncton/Greater Moncton Intl, NB (CYQM) ATIS 128.65 App/Dep 124.4 Tower 120.8 236.6 Gnd Con 121.8 275.8 Apron Advisory 122.075	H-11E, L-32J
Mont-Laurier, QC (CSD4) Montreal Center App/Dep Con 126.57	L-32G
Montreal Intl (Mirabel), QC (CYMX) ATIS 125.7 Montreal Center App Con 124.65 132.85 268.3 Montreal Dep Con 132.85 268.3 MF 119.1 (7 NM shape irregular to 2000') VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/Pierre Elliott Trudeau Intl, QC (CYUL) ATIS 133.7 Montreal Trml App Con 118.9 124.65 126.9 132.85 268.3 Tower 119.9 267.1 Gnd Con 121.9 275.8 Clnc Del 125.6 Apron 122.075 Montreal Trml Dep Con 118.9 (SE-S-SW) 124.65 (W-NW-NE) 268.3 VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/St-Hubert, QC (CYHU) ATIS 124.9 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) AWOS 124.9 Montreal Center App/Dep Con 125.15 268.3 St. Hubert Tower 118.4 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) Gnd Con 126.4 MF 118.4 (Apr-Oct 0500-1045Z‡, Nov-Mar 0400-1045Z 5 NM shape irregular to 2500') VFR Advisory 134.15	H-11C, L-32G
Muskoka, ON (CYQA) AWOS 124.575 Timmins Radio App/Dep Con 122.3 MF 122.3 (5 NM to 3900')	H-11B, L-31D
Nanaimo, BC (CYCD) Victoria Trml App/Dep 120.8 133.95 252.3 MF 122.1 291.8 1330-0530Z‡ (5 NM to 2500')	H-1B, L-1E
North Bay, ON (CYYB) ATIS 124.9 (1130-0330Z‡) Toronto Center App/Dep 121.225 127.25 MF 118.3 (1130-0330Z‡ 7 NM to 5000')	H-11B, L31D
Oshawa, ON (CYYO) ATIS 125.675 (1130-0330Z‡) Toronto Trml App/Dep Con 133.4 Tower 120.1 (1130-0330Z‡) Gnd Con 118.4 MF 120.1 (0330-1130Z‡ 5 NM to 3000')	L-31E

FACILITY NAME	CHART & PANEL
Ottawa/Carp, ON (CYRP) ATIS 121.15 Ottawa Trml App/Dep Con 128.175	L-31E, 32F
Ottawa/Gatineau, QC (CYND) Ottawa Trml App/Dep Con 127.7 128.175 MF 122.3 (5 NM shape irregular to 2500') VFR Advisory Ottawa Trml 127.7	H-11C, L-32G
Ottawa/MacDonald-Cartier Intl, ON (CYOW) ATIS 121.15 Ottawa App Con 135.15 Tower 118.8 (VFR South) 120.1 (VFR North) 118.8 341.3 Gnd Con 121.9 Cinc Del 119.4 Ottawa Dep Con 128.175	L-11C
Owen Sound/Billy Bishop Rgnl, ON (CYOS) Toronto Center App/Dep 132.575 290.6	L-31D
Pelee Island, ON (CYPT) Cleveland Center App/Dep Con 126.35 360.0	L-30F
Pembroke, ON (CYTA) Montreal Center App/Dep Con 135.2 Petawawa Advisory 126.4 250.1 (Mon-Fri 1300-2130Z†, OT PPR)	H-11C, L-31E, 32F
Penticton, BC (CYYF) Vancouver Center App/Dep Con 133.5 351.3 MF 118.5 (5 NM to 4100')	H-1B
Peterborough, ON (CYPQ) AWOS 126.925 Toronto Center App/Dep 134.25	H-11B, L-31E, 32F
Pincher Creek, AB (CZPC) Edmonton Center App/Dep Con 132.75 265.2	H-1D
Pitt Meadows, BC (CYPK) ATIS 125.0 (1500-0700Z†) Vancouver Center App Con 128.6 352.7 (Outer) Pitt Tower 126.3 (1500-0700Z†) Gnd Con 123.8 Vancouver Center Dep Con 132.3 363.8 (South) MF 126.3 (0700-1500Z†) (3NM to 2500')	L-1E
Quebec/Jean Lesage Intl, QC (CYQB) ATIS 134.6 AWOS 122.025 (Pvt) Montreal Center App/Dep Con 124.0 127.85 135.025 270.9 322.8 Tower 118.65 236.6 Gnd Con 121.9 250.0	H-11D, L-32H
Riviere Du Loup, QC (CYRI) AWOS 122.025 (Pvt) Montreal Center App/Dep Con 125.1 299.6	H-11D
Rouyn Noranda, QC (CYUY) Montreal Center App/Dep Con 125.9 MF 122.2 (5 NM to 4000')	H-11B
Saint John, NB (CYSJ) Moncton Center App/Dep Con 124.3 135.5 270.8 MF 118.5 (5 NM to 3400')	H-11E, L-32J
Sarnia (Chris Hadfield), ON (CYZR) AWOS 119.125 Toronto Center App/Dep Con 134.375	H-10G, 11B, L-30F
Sault Ste Marie, ON (CYAM) ATIS 133.05 (1300-0100Z†) Toronto Center App/Dep Con 132.65 344.5 Tower 118.8 (1300-0100Z†) Gnd Con 121.7 (1300-0100Z†) MF 118.8 (0100-1300Z† 5 NM irregular shape to 3000')	H-2K, L-31B
Sherbrooke, QC (CYAM) AWOS 126.25 Montreal Center App/Dep Con 132.55 MF 123.5 (Ltd hrs 5 NM to 3800')	H-11D, L-32H
South Renfrew Muni, ON (CNP3) Montreal Center App/Dep 124.275	L-31E, 32F
Southport, MB (CYPG) ATIS 120.85 (Mon-Fri 1400-2300Z† except holidays) Tower 126.2 384.2 (Mon-Fri 1400-2300Z† except holidays) Gnd Con 121.7 275.8	H-2H

FACILITY NAME	CHART & PANEL
Springwater Barrie Airpark, ON (CNA3) Toronto Center App/Dep Con 124.025	L-31D
St. Catharines/Niagara District, ON (CYSN) ATIS 128.525 (1215-0200Z‡) Toronto Trml App/Dep Con 133.4 253.1 MF 123.25 (1215-0200Z‡ 5 NM to 3300')	H-10H, 11B, L-31E
St. Frederic, QC (CSZ4) Montreal Center App/Dep Con 135.025 270.9	L-32H
St. Georges, QC (CYSG) Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM 3900' ASL)	H-32H, L-11D
St. Jean, QC (CYJN) Montreal Center App/Dep Con 125.15 268.3 Tower 118.2 (Apr-Oct 1230-0230Z‡ Nov-Mar 1300-0200Z‡) Gnd Con 121.7	L-32G
Sudbury, ON (CYSB) ATIS 127.4 Toronto Center App/Dep Con 135.5 MF 125.5 (7 NM to 4000')	H-31B, 10G, L-31D
Summerside, PE (CYSU) AWOS 122.55 (Pvt) Moncton Center App/Dep Con 124.4 384.8	H-11E, L-32J
Thunder Bay, ON (CYQT) ATIS 128.8 (1100-0400Z‡) Winnipeg Center App/Dep Con 132.125 Tower 118.1 (1100-0400Z‡) Gnd Con 121.9 (1100-0400Z‡) App/Dep 119.2 MF 118.1 (0400-1100Z‡ 5 NM to 4000')	H-2J, L-14J
Timmins/Victor M. Power, ON (CYTS) ATIS 124.95 (1000-0500Z‡) Toronto Center App/Dep Con 128.3 MF 122.3 (5 NM to 4000')	H-11B
Toronto/Buttonville Muni, ON (CYKZ) ATIS 127.1 (1200-0400Z‡) Toronto Trml App/Dep Con 133.4 Tower 124.8 119.9 (1200-0400Z‡) Gnd Con 121.8 (1200-0400Z‡) MF 124.8 (0400-1200Z‡ No gnd station. 5 NM shape irregular to below 2500')	L-31E
Toronto/Billy Bishop Toronto City Airport, ON (CYYZ) ATIS 133.6 (1130-0400Z‡) App/Dep Con 133.4 Tower 118.2 119.2 (1130-0400Z‡) Gnd Con 121.7	L-31E
Toronto/Lester B Pearson Intl, ON (CYYZ) ATIS 120.825 App Con 124.475 125.4 132.8 Dep Con 127.575 128.8 Tower 118.35 118.7 Gnd Con 119.1 121.65 121.9 Clnc Del 121.3 (1200-0400Z‡)	H-11B, L-31D
Trenton, ON (CYTR) ATIS 135.45 257.7 App/Dep Con 128.4 324.3 Tower 128.7 236.6 Gnd Con 121.9 275.8 Clnc Del 124.35 286.4	H-11C, L-31E, 32F
Trenton/Mountain View, ON (CPZ3) Trenton Mil Advisory 268.0	H-11C, L-31E, 32F
Trois-Rivieres, QC (CYRQ) Montreal Center App/Dep Con 128.225 229.2 MF 123.0 (5 NM to 3200')	H-11C, L-32H
Val-D'or, QC (CYVO) Montreal Center App/Dep Con 125.9 308.3 MF 118.5 (1030-0325Z‡ 5 NM to 4000')	H-11B
Vancouver Intl, BC (CYVR) ATIS 124.6 124.75 App Con 128.6 128.17 352.7 (Outer) 133.1 134.225 352.7 (Inner) Dep Con 126.125 (north) 132.3 (south) 363.8 Tower 118.7 (south) 119.55 (north) VFR 124.0 125.65 226.5 236.6 Gnd Con 121.7 (south) 127.15 (north) 275.8 Clnc Del 121.4	H-1B, L-1E

FACILITY NAME	CHART & PANEL
Victoria Intl, BC (CYYJ) ATIS 118.8 (1400-0800Z‡) App Con 125.95 Dep Con 133.85 Tower 119.1 (Outer) 119.7 (Inner) 239.6 Gnd Con 121.9 361.4 (1400-0800Z‡ OT ctc Kamloops 119.7) Clnc Del 126.4 (1400-0800Z‡)	H-1B, L-1E
Victoriaville, QC (CSR3) Montreal Center App Con 132.35	L-32H
Waterville/Kings Co Muni, NS (CCW3) Greenwood Trml App/Dep Con 120.6 335.9 Greenwood Tower 119.5 324.3	L-32J
Warton, ON (CYVY) Toronto Center App/Dep Con 132.575 MF 122.2 (5 NM to 3700')	H-11B, L-31D
Windsor, ON (CYQG) ATIS 134.5 (1130-0330Z‡) Detroit App/Dep Con 126.85 127.5 134.3 348.3 363.2 Tower 124.7 (1130-0330Z‡) Gnd Con 121.7 (1130-0330Z‡) MF 124.7 (0330-1130Z‡ 6 NM irregular shape to below 3000') VFR Advisory Detroit App Con 134.3	H-10G, L-8J
Yarmouth, NS (CYQI) Moncton Center App/Dep Con 123.9 368.5 MF 123.0 (5 NM to 3100')	H-11E, L-32I

MEXICO

FACILITY NAME	CHART & PANEL
Abraham Gonzalez Intl (MMCS) Juarez App Con 119.9 Juarez Tower 118.9	H-4K, L-6F
Del Norte Intl (MMAN) ATIS 127.55 (1300-0300Z‡) Monterrey App 119.75 120.4 Tower 118.6	H-7B, L-20G
Durango Intl (MMDO) ATIS 132.1 Tower 118.1 Durango Info 122.3	H-7A
General Abelardo L Rodriguez Intl (MMTJ) ATIS 127.9 Tijuana App Con 119.5 120.3 Tijuana Tower 118.1 Tijuana Clnc Del 122.35 Tijuana Info 132.1	H-4H, L-4H
General Lucio Blanco Intl (MMRX) Reynosa App Con 118.8 Reynosa Tower 118.8	H-7B, L-20H
General Mariano Escobedo Intl (MMMY) ATIS 127.7 Monterrey App Con 119.75 120.4 Monterrey Tower 118.1 Gnd Con 121.9	H-7B, L-20G
General R Fierro Villalobos Intl (MMCU) ATIS 127.9 Chihuahua App Con 121.0 Chihuahua Tower 118.4	L-6I
General Rodolfo Sanchez Taboada Intl (MMML) ATIS 127.6 Mexicali App Con 118.2 Mexicali Tower 118.2 Mexicali Info 123.9 122.3	H-4H, L-4J, 5A
General Servando Canales Intl (MMMA) Matamoros App Con 118.0 Matamoros Tower 118.0	H-7C, L-21A
Plan De Guadalupe Intl (MMIO) Saltillo App Con 127.4 Saltillo Tower 118.4	H-7B
Quetzalcoatl Intl/Nuevo Laredo Intl (MMNL) Nuevo Laredo App Con 118.3 Nuevo Laredo Tower 118.3	H-7B, L-20G
Torreón Intl (MMTC) App Con 119.6 Tower 118.5	H-7A





In support of the Federal Aviation Administration's Runway Incursion Program, selected towered airport diagrams have been published in the Airport Diagram section of the A/FD. Diagrams will be listed alphabetically by associated city and airport name. Airport diagrams, depicting runway and taxiway configurations, will assist both VFR and IFR pilots in ground taxi operations. The airport diagrams in this publication are the same as those published in the U.S. Terminal Procedures Publications. For additional airport diagram legend information see the U.S. Terminal Procedures Publication.

NOTE: Some text data published under the individual airport in the front portion of the A/FD may be more current than the data published on the Airport Diagrams. The airport diagrams are updated only when significant changes occur.

GENERAL INFORMATION

PILOT CONTROLLED AIRPORT LIGHTING SYSTEMS





Available pilot controlled lighting (PCL) systems are indicated as follows:

1. Approach lighting systems that bear a system identification are symbolized using negative symbology, e.g., , , .
2. Approach lighting systems that do not bear a system identification are indicated with a negative "0"  beside the name.

A star (★) indicates non-standard PCL, consult the individual airport in the front portion of the A/FD, e.g., ★. To activate lights use frequency indicated in the communication section of the chart with a  or the appropriate lighting system identification e.g., UNICOM 122.8 , , .

<u>KEY MIKE</u>	<u>FUNCTION</u>
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-off)

CHART CURRENCY INFORMATION

FAA procedure amendment number  Amdt 11A 99365  Date of latest change
 Orig 00365 

The Chart Date identifies the Julian date the chart was added to the volume or last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6) in which the latest addition or change was first published.

The Procedure Amendment Number precedes the Chart Date, and changes any time instrument information (e.g., DH, MDA, approach routing, etc.) changes. Procedure changes also cause the Chart Date to change.

MISCELLANEOUS


- ★ Indicates a non-continuously operating facility, see the individual airport in the front portion of the A/FD.
- # Indicates control tower temporarily closed UFN.

LEGEND


INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways




ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to appropriate DOD publications.



ARRESTING SYSTEM

REFERENCE FEATURES

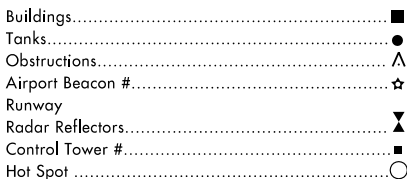

When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.

Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A D symbol is shown to indicate runway declared distance information available, see appropriate A/FD, Alaska or Pacific Supplement for distance information.

Runway Weight Bearing Capacity/or PCN Pavement Classification Number is shown as a codified expression.

Refer to the appropriate Supplement/Directory for applicable codes e.g., RWY 14-32 PCN 80 F/D/X/U S-75, D-185, 2S-175, 2D-325

Helicopter Alighting Areas H + H A +
Negative Symbols used to identify Copter Procedures landing point..... -H -+ -H -A -+

Runway Threshold elevation.....THRE 123

Runway TDZ elevation.....TDZE 123

Runway Slope.....0.3% DOWN
(shown when runway slope is greater than or equal to 0.3%)

NOTE:

Runway Slope measured to midpoint on runways 8000 feet or longer.

U U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.

Airport diagram scales are variable.


True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or ½ minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.

Positional accuracy within ±600 feet unless otherwise noted on the chart.

NOTE:

All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in FLIP. (Foreign Only)

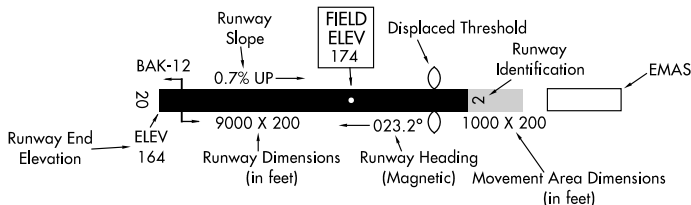

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating Computer Based Navigation Systems (I.E., INS, GPS) aboard aircraft. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

LEGEND

HOT SPOTS

An “airport surface hot spot” is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A “hot spot” is a runway safety related problem area on an airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles or polygons designated as “HS 1”, “HS 2”, etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION
IDAHO		
BOISE		
BOISE AIR TERMINAL/GOWEN FLD (BOI)	HS 1	Pilots departing Rwy 10L often miss the left turn on Twy A and continue taxi on Twy J. Do not mistake Rwy 10L apch sign for Rwy 10L entrance.
IDAHO FALLS		
IDAHO FALLS RGNL (IDA)	HS 1	Pilots should use caution and look carefully for rwy hold line when using Twy C. Rwy 17–35 does not have rwy edge markings and can be mistaken for a twy.
	HS 2	Acft departing Rwy 20 often miss left turn on A1 and taxi past A1 entrance. Do not mistake Rwy 20 apch hold line on Twy A for entrance to Rwy 20.
	HS 3	Do not cross hold line for Rwy 17 without authorization.
LEWISTON		
LEWISTON-NEZ PERCE CO (LWS)	HS 1	Twy C and Twy G intersection close proximity to Rwy 12–30.
	HS 2	Twy G between Rwy 08–26 and Rwy 30 thld. Short distance between rwys.
MONTANA		
BILLINGS		
BILLINGS LOGAN INTL (BIL)	HS 1	Rwy 28R hold line is at east edge of run up area, more than 900’ taxi distance from the rwy edge. Use extreme caution to stop.
	HS 2	Twy H crosses Rwy 07 protected area. Do not proceed across Rwy 07 without an ATCT clearance.
GREAT FALLS		
GREAT FALLS INTL (GTF)	HS 1	Acft departing Rwy 21 often miss left turn at Twy A1. There is no rwy access beyond Twy A1.
	HS 2	Twy A3 aligned with Rwy 25. Acft departing Rwy 21 at Twy A3 must verify heading prior to txf due to wrong rwy departure risk.
OREGON		
EUGENE		
MAHLON SWEET FIELD (EUG)	HS 1	Acft taxiing to Rwy 34L often miss right turn at Twy A8 or Twy A9. Do not mistake Rwy 34L apch hold sign on Twy A south of Twy A9 for rwy entrance.
PORTLAND		
PORTLAND INTL (PDX)	HS 1	Limited wing-tip clearance at twy convergence point. Pilots taxiing eastbound on Twy B should hold at the twy holding position marking when directed by ATC.
SALEM		
MCNARY FLD (SLE)	HS 1	When the ATCT is clsd the rwy holding position marking on the west side of Rwy 16–34 is inside the protected area for Rwy 13–31. Pilots should not hold at this position if other txf is arriving or departing on Rwy 13–31.

WASHINGTON

EVERETT SNOHOMISH COUNTY (PAINE FIELD) PAE	HS 1	Pilots holding short of Rwy 11–29 at Twy A4 or Twy A5 should use caution to stop prior to the rwy holding position marking. Rwy hold position signs are located 230' to the right and 350' to the left of the Twy A5 centerline and may be difficult to locate. Rwy 29 thld in close proximity to ramp areas. Twy A between Twy A8 and Twy A9 not visible from ATCT.
	HS 2	
	HS 3	
SEATTLE BOEING FIELD/KING COUNTY INTL (BFI)	HS 1	Twy Z restricted access area.
	HS 2	Rwy 13R–31L and Twy A9. Wrong rwy departure risk.
SEATTLE SEATTLE-TACOMA INTL (SEA)	HS 1	Acft ldg Rwy 34C and exiting Twy H who turn right on Twy J must clear the Rwy 34C hold bar completely, while using vigilance not to cross the hold bar for Rwy 34R (34C–34R hold bar separation distance 189').


WYOMING

CHEYENNE CHEYENNE RGNL/JERRY OLSON FIELD (CYS)	HS 1	Confusing twy configuration. Twy A transitions to Twy B and back to Twy A when taxiing to and from Rwy 13–31.
--	------	---

10210

AIRPORT DIAGRAM

AL-45 (FAA)

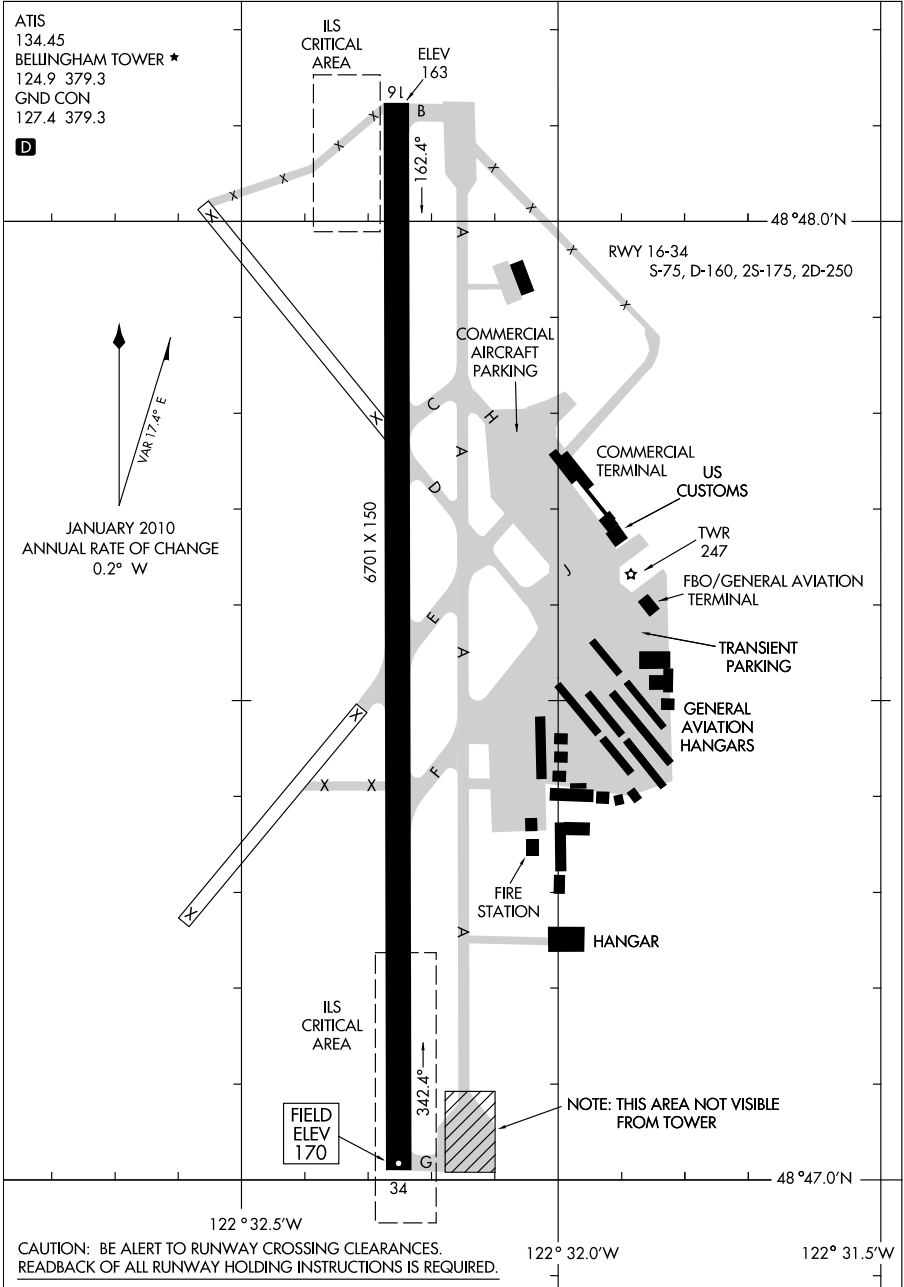BELLINGHAM INTL (BLI)
BELLINGHAM, WASHINGTON

AIRPORT DIAGRAM

10210

BELLINGHAM, WASHINGTON
BELLINGHAM INTL (BLI)

NW, 23 SEP 2010 to 18 NOV 2010


10266

AIRPORT DIAGRAM

AL-48 (FAA)

BILLINGS LOGAN INTL (BIL)

BILLINGS, MONTANA

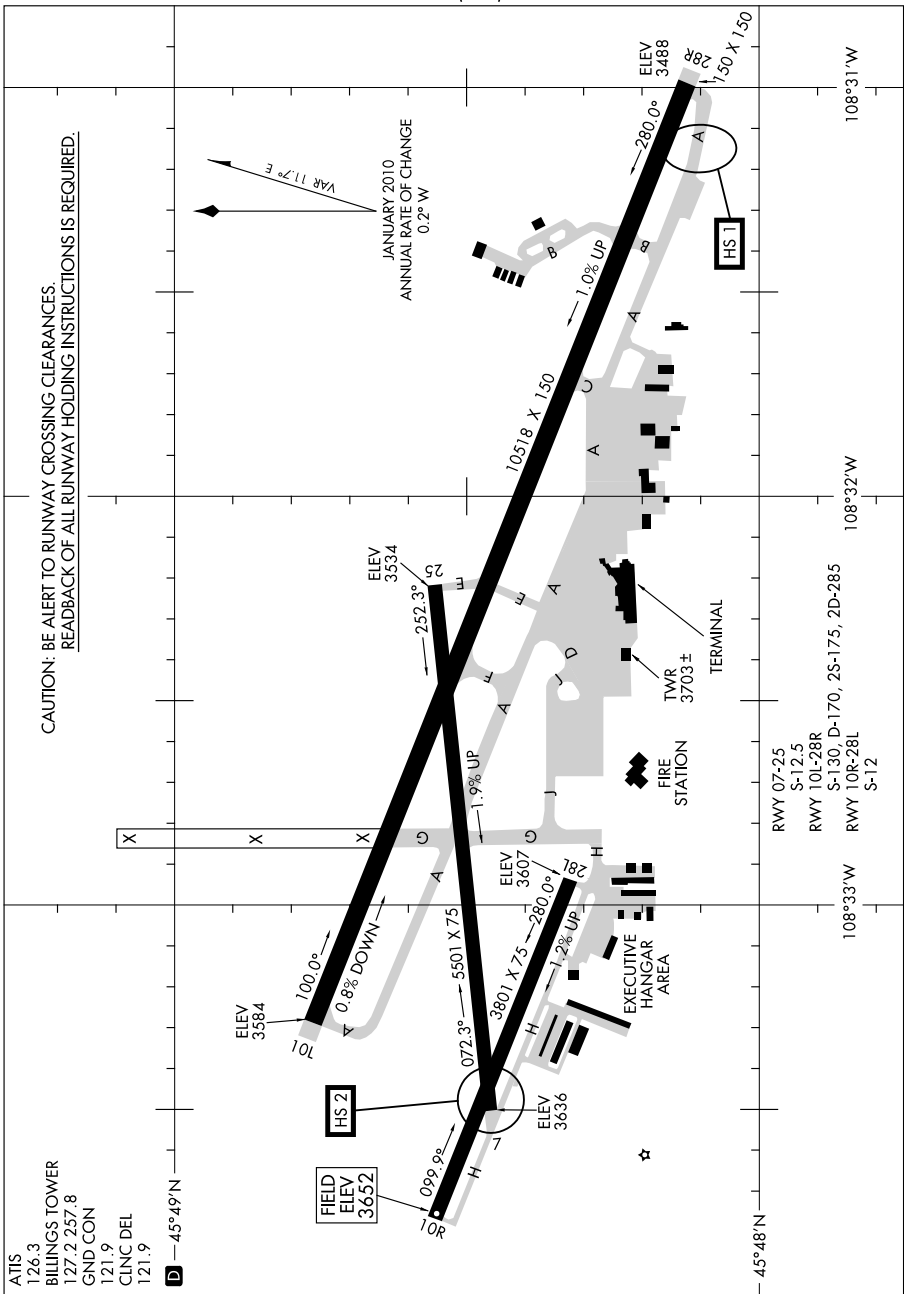


AIRPORT DIAGRAM

BILLINGS, MONTANA
 BILLINGS LOGAN INTL (BIL)

10266

AIRPORT DIAGRAM

BOISE AIR TERMINAL (GOWEN FIELD) (BOI)
AL-57 (FAA) BOISE, IDAHO

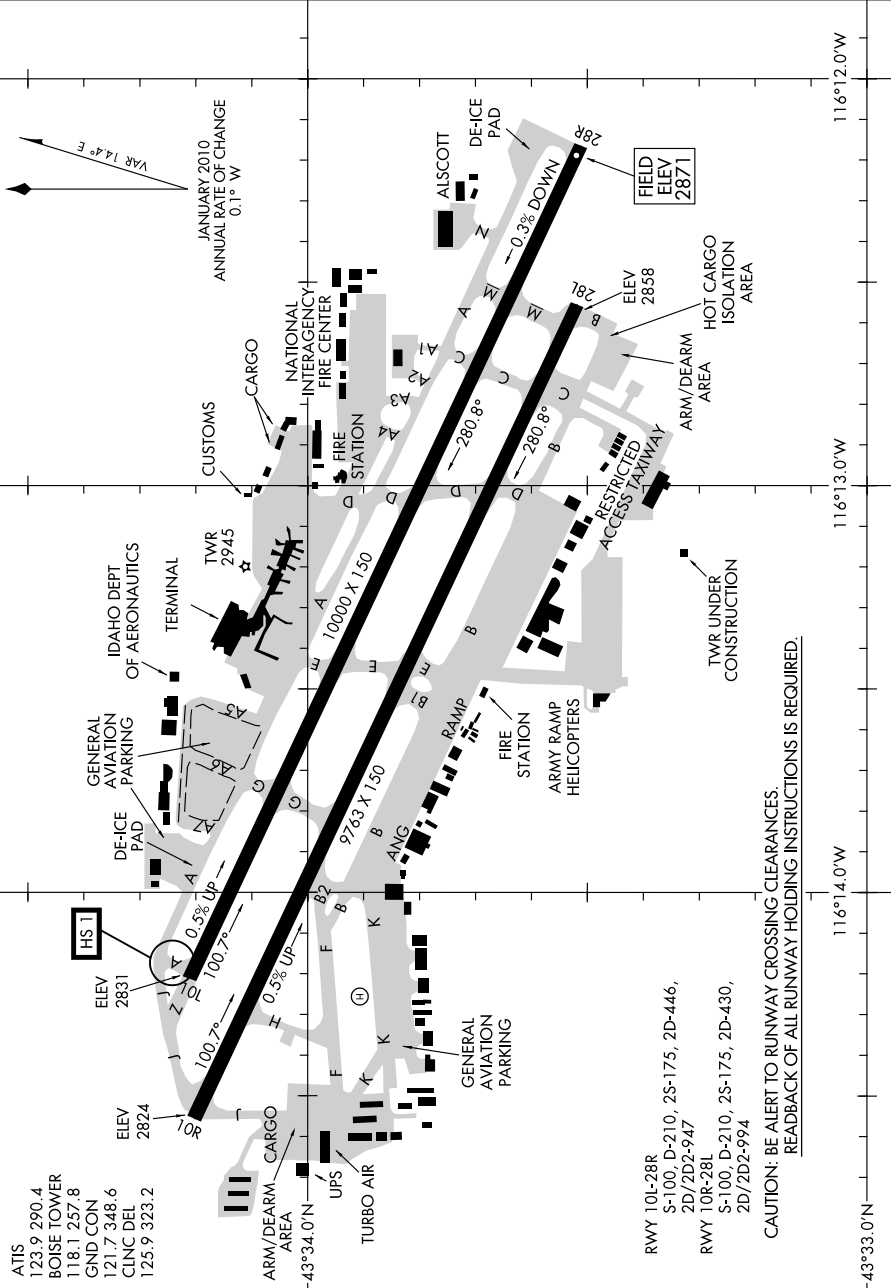

AIRPORT DIAGRAM

BOISE, IDAHO
BOISE AIR TERMINAL (GOWEN FIELD) (BOI)


10210

AIRPORT DIAGRAM

AL-59 (FAA)

BOZEMAN/GALLATIN FIELD (BZN)

BOZEMAN, MONTANA

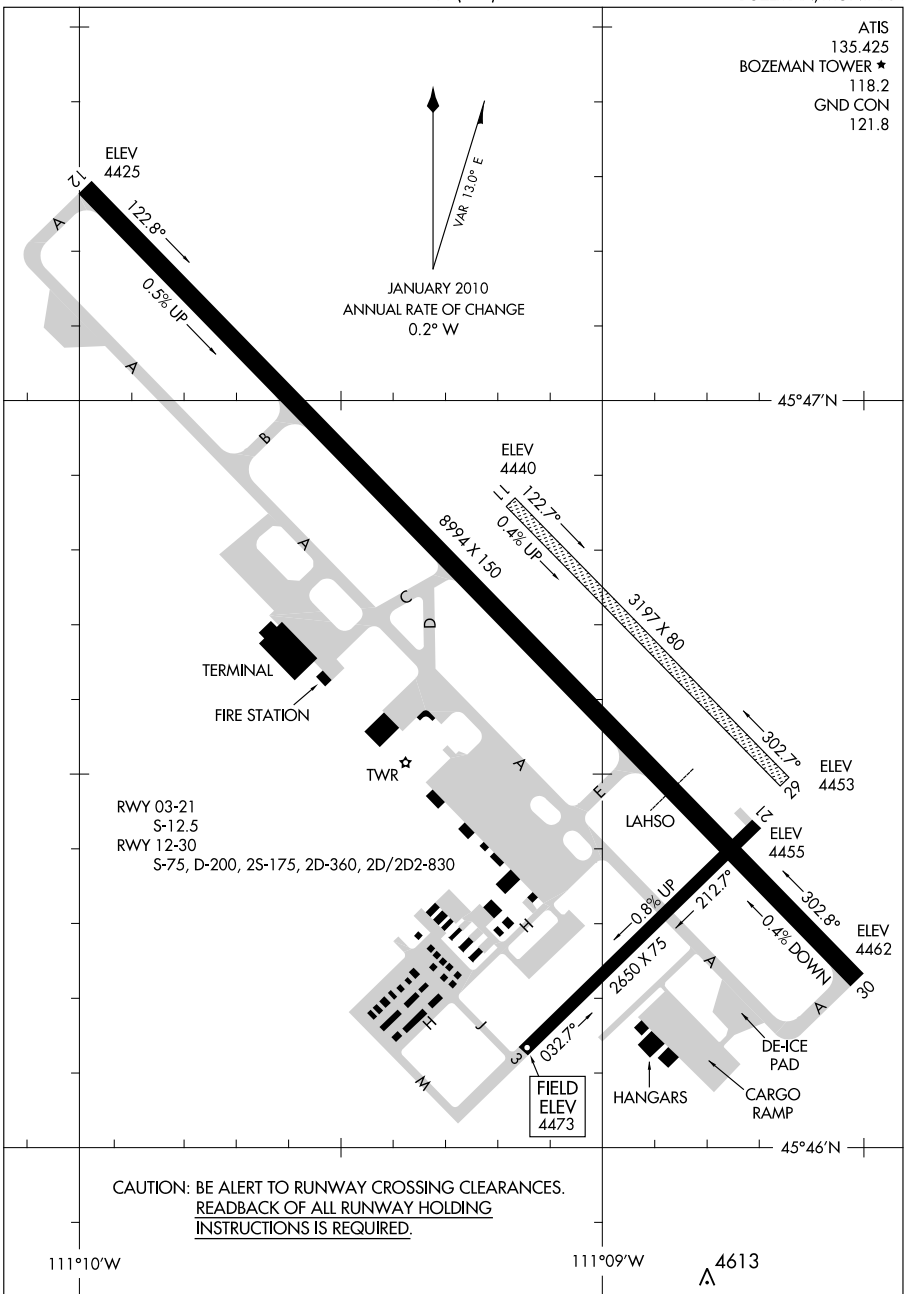

AIRPORT DIAGRAM

10210

BOZEMAN, MONTANA

BOZEMAN/GALLATIN FIELD (BZN)

NW. 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM


AL-72 (FAA)

CASPER/NATRONA COUNTY INTL (CPR)

CASPER, WYOMING

ATIS
126.15
CASPER TOWER★
118.3 257.8
GND CON
121.9
CLNC DEL
121.9 257.8

D

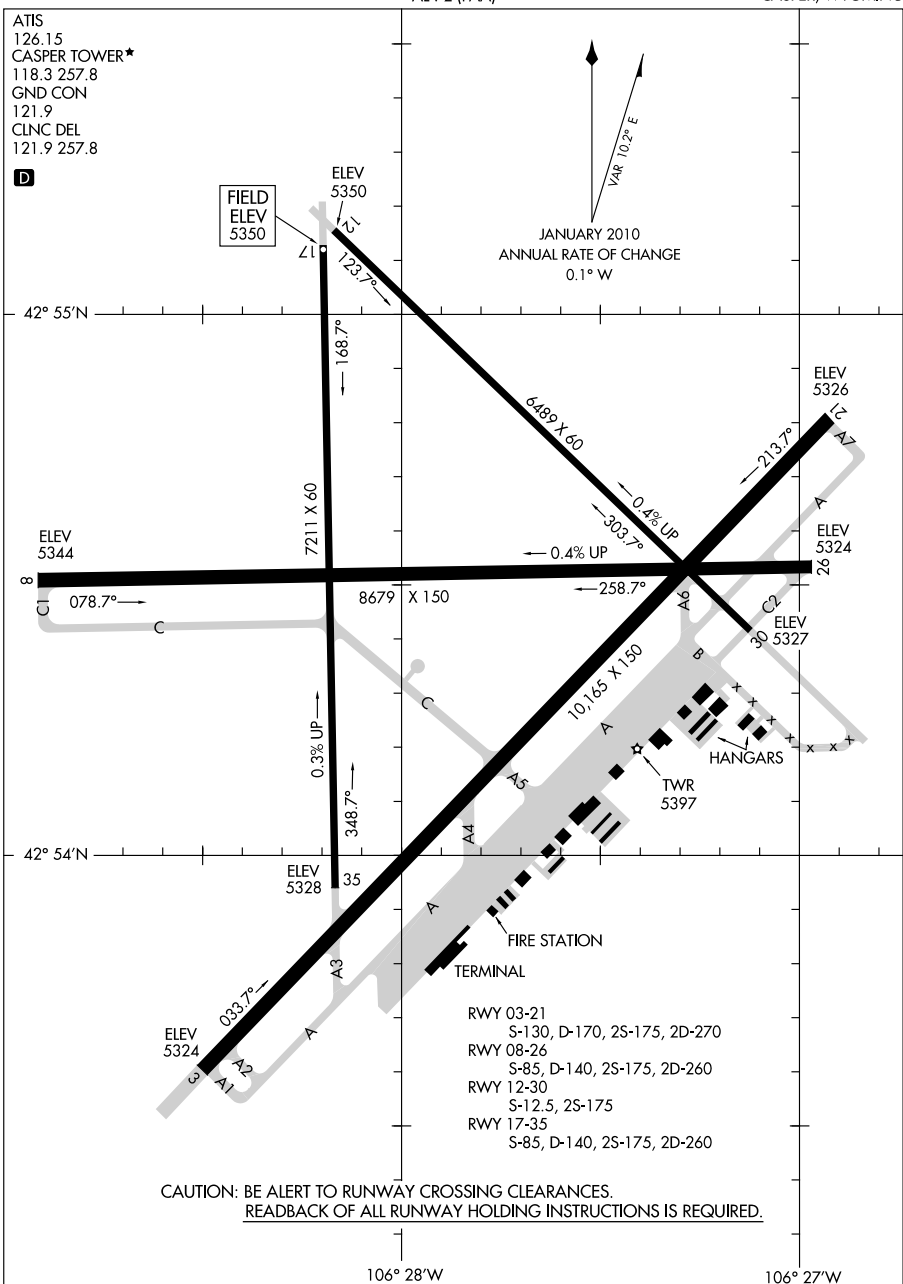

AIRPORT DIAGRAM

10210


CASPER, WYOMING
CASPER/NATRONA COUNTY INTL (CPR)

NW. 23 SEP 2010 to 18 NOV 2010

10266

AIRPORT DIAGRAM

EUGENE/MAHLON SWEET FIELD (EUG)
EUGENE, OREGON

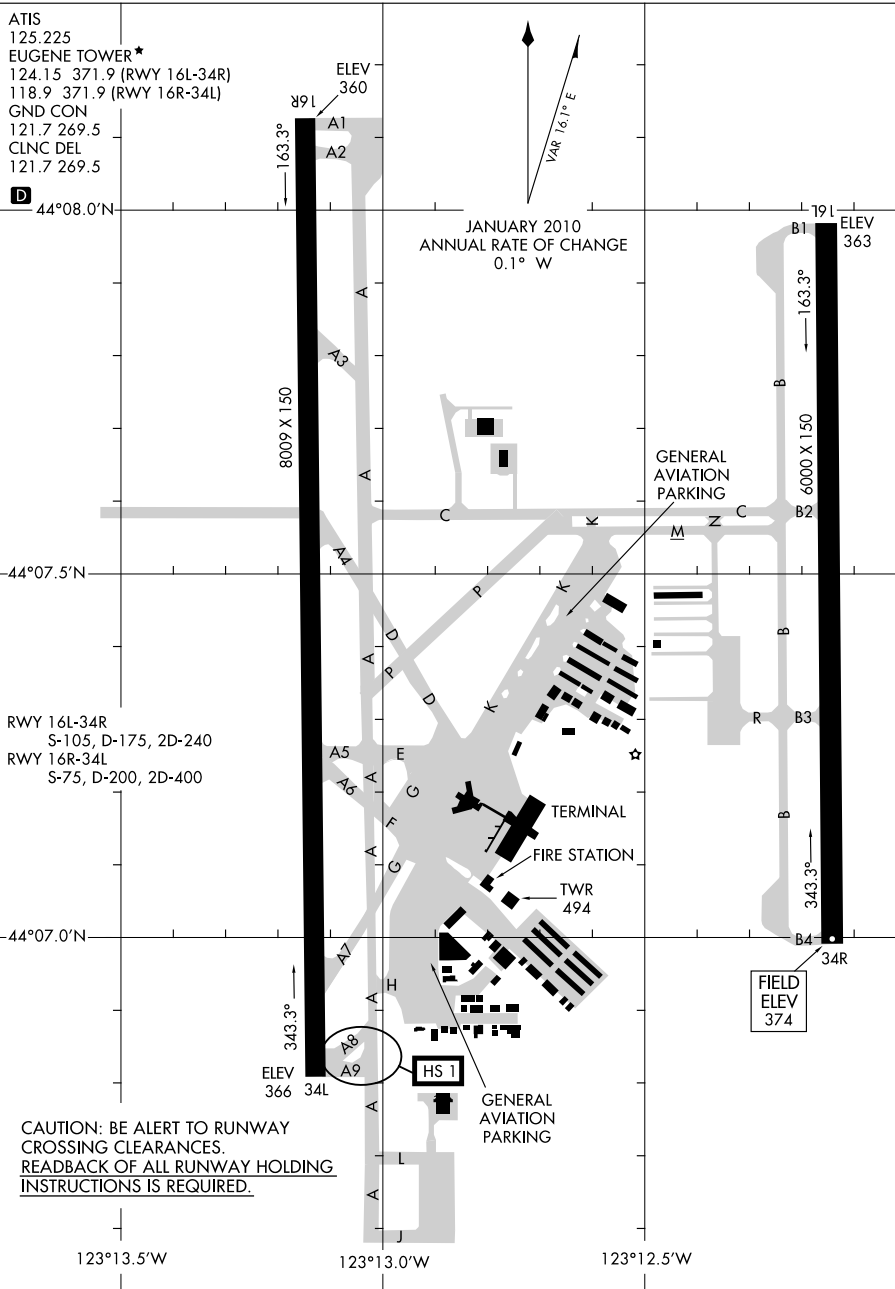

AIRPORT DIAGRAM

EUGENE, OREGON
EUGENE/MAHLON SWEET FIELD (EUG)


10266

AIRPORT DIAGRAM

AFD-553 [USAF]

FAIRCHILD AFB (KSKA)

SPOKANE, WASHINGTON

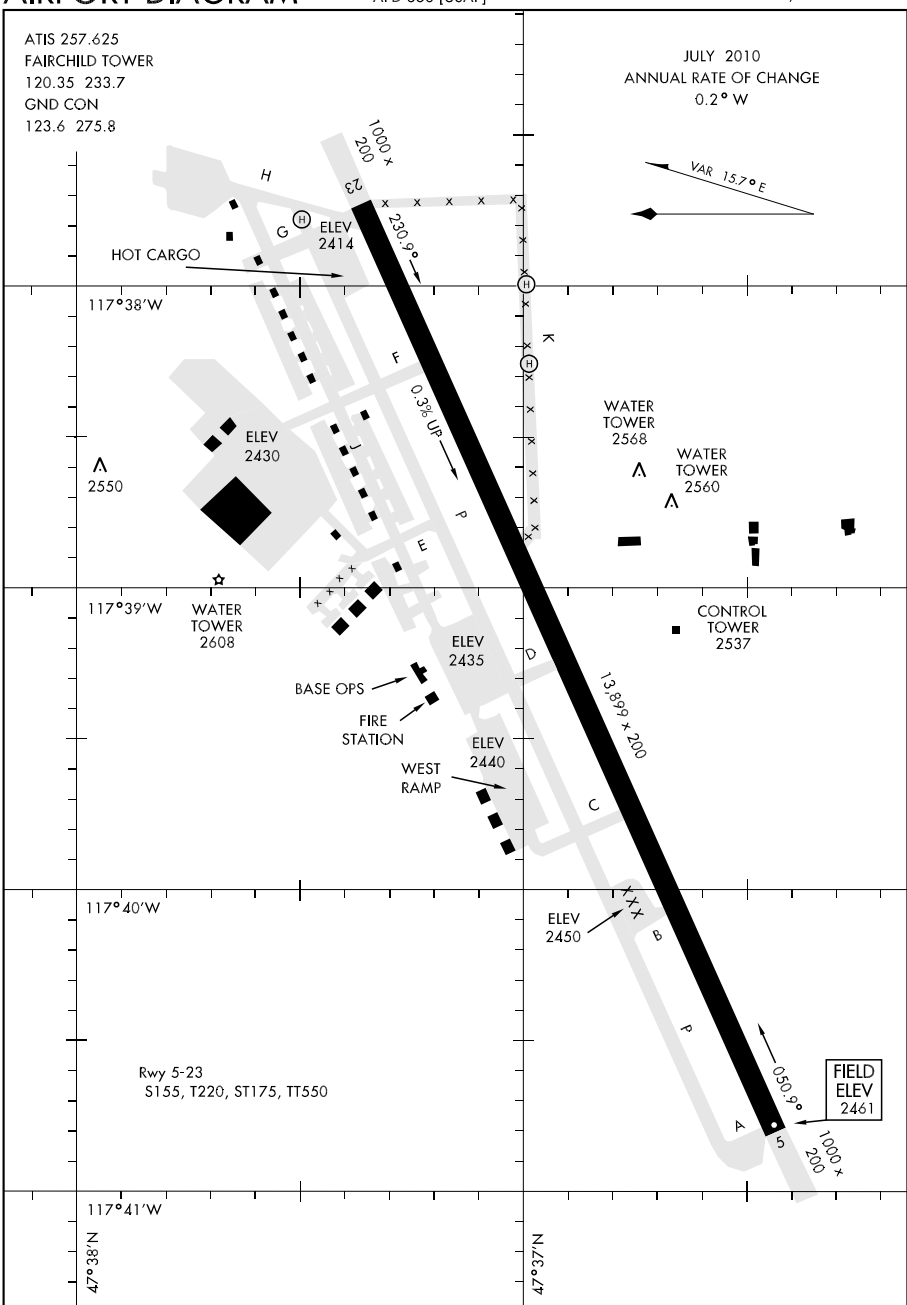

AIRPORT DIAGRAM


SPOKANE, WASHINGTON
FAIRCHILD AFB (KSKA)

10266

AIRPORT DIAGRAM

AL-5728 (FAA)

GILLETTE-CAMPBELL COUNTY (GCC)
GILLETTE, WYOMING

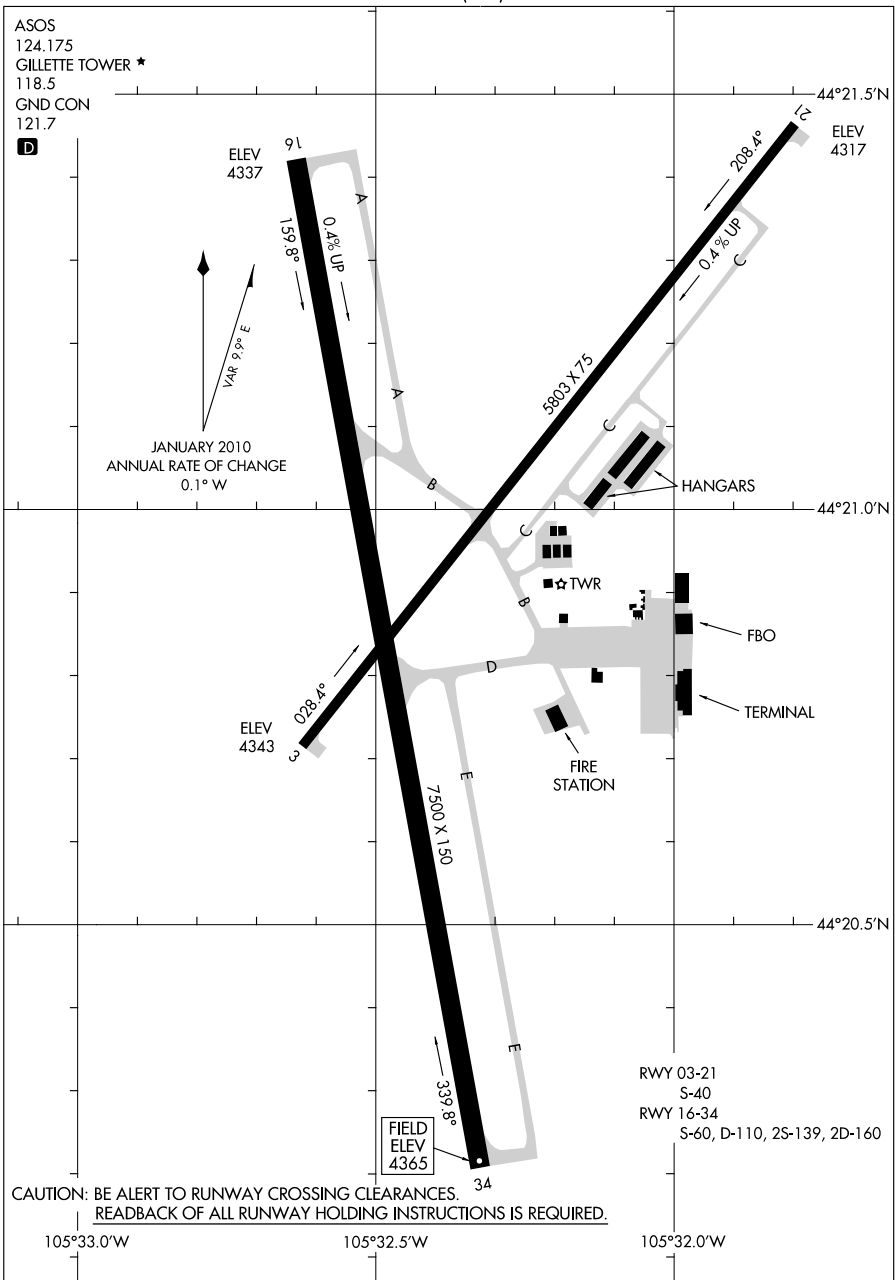

AIRPORT DIAGRAM

10266

GILLETTE, WYOMING
GILLETTE-CAMPBELL COUNTY (GCC)


08157

GRAY AAF (KGRF)

AIRPORT DIAGRAM

AFD-413 [USA]

FORT LEWIS, WASHINGTON

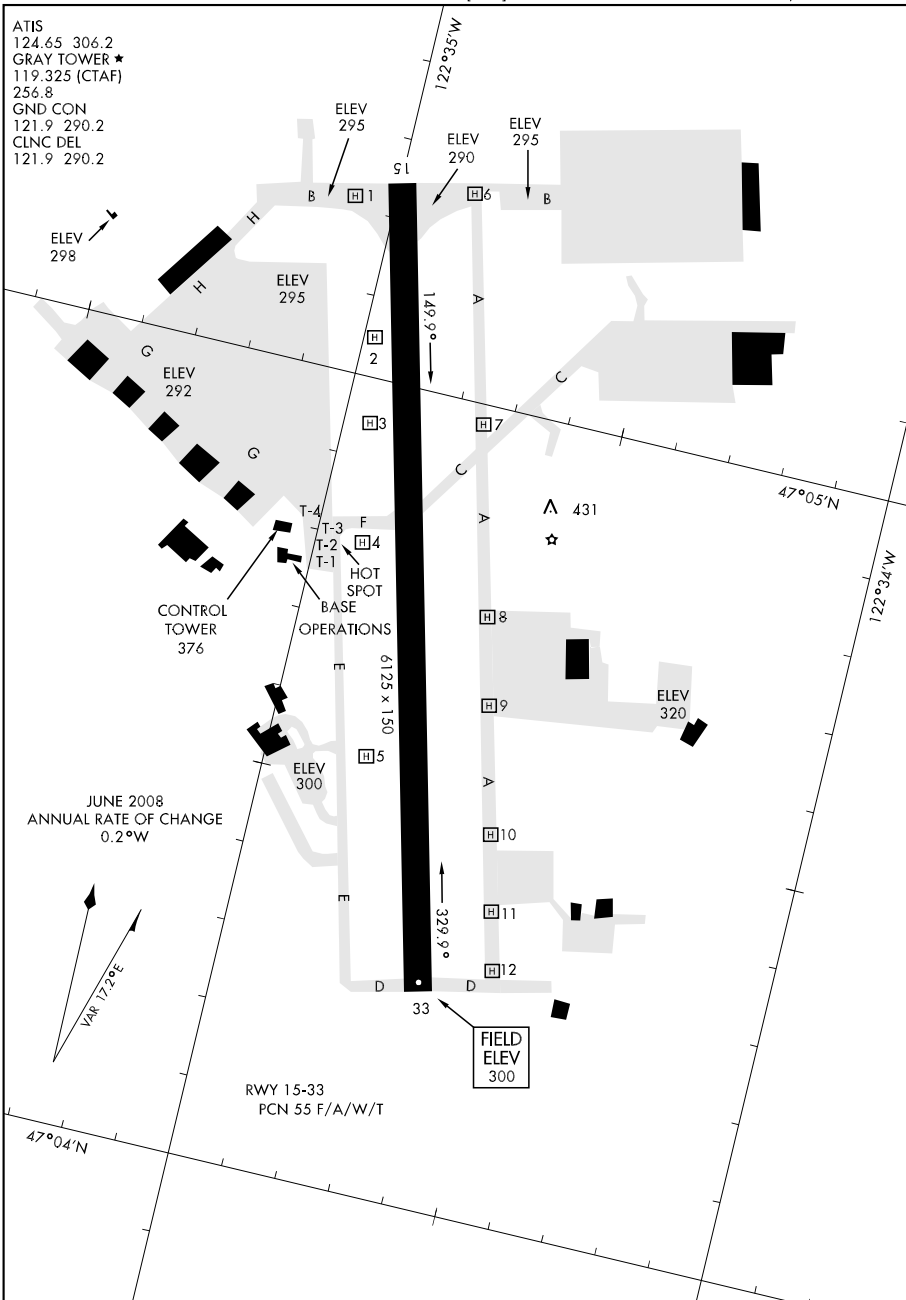

AIRPORT DIAGRAM

FORT LEWIS, WASHINGTON

GRAY AAF (KGRF)


NW, 23 SEP 2010 to 18 NOV 2010

10266

AIRPORT DIAGRAM

AL-177 (FAA)

GREAT FALLS INTL (GTF)
GREAT FALLS, MONTANA

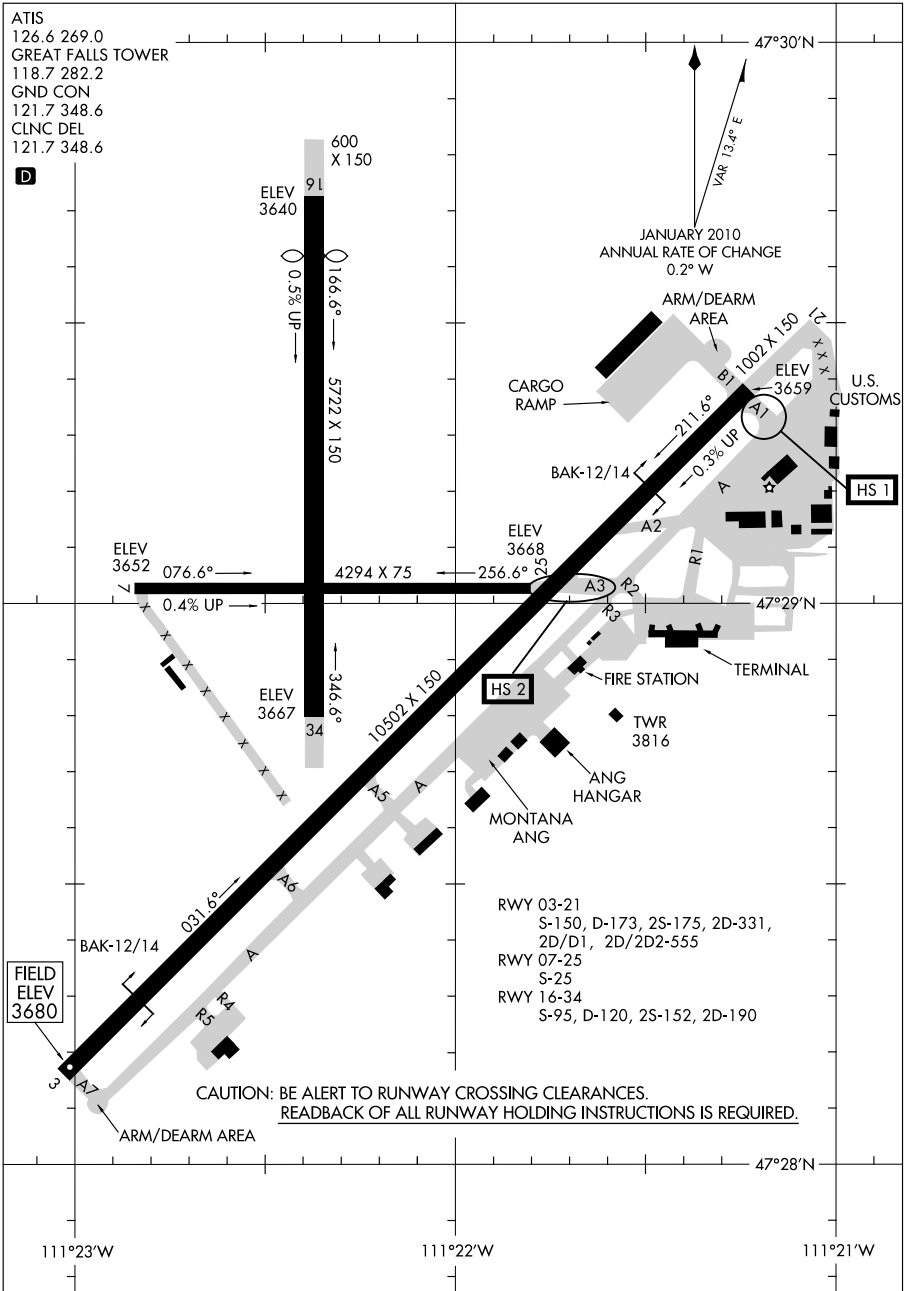


AIRPORT DIAGRAM

GREAT FALLS, MONTANA
GREAT FALLS INTL (GTF)

10266

NW. 23 SEP 2010 to 18 NOV 2010

AIRPORT DIAGRAM

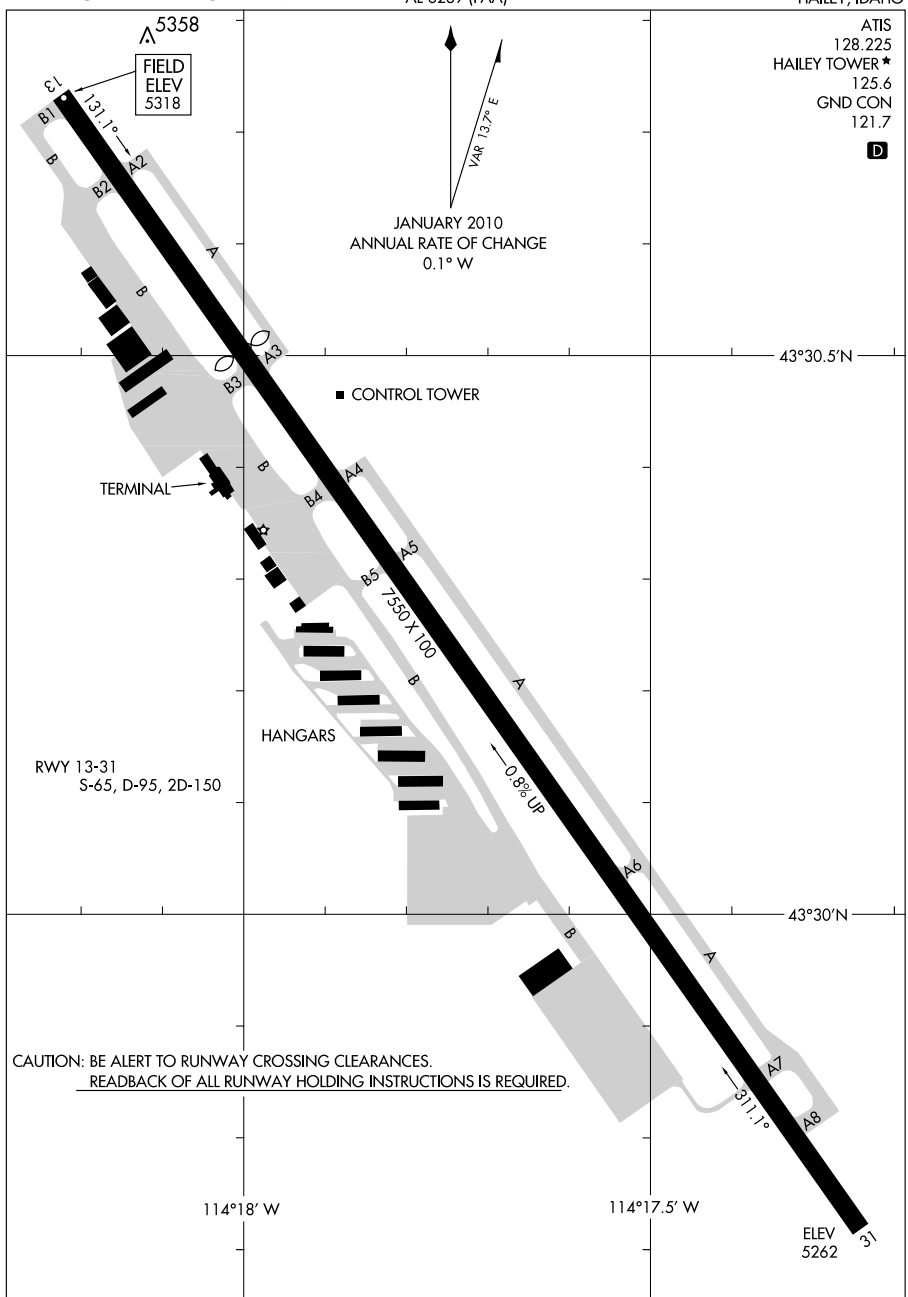


AIRPORT DIAGRAM

10210

AIRPORT DIAGRAM

AL-192 (FAA)

HELENA RGNL (HLN)
HELENA, MONTANA

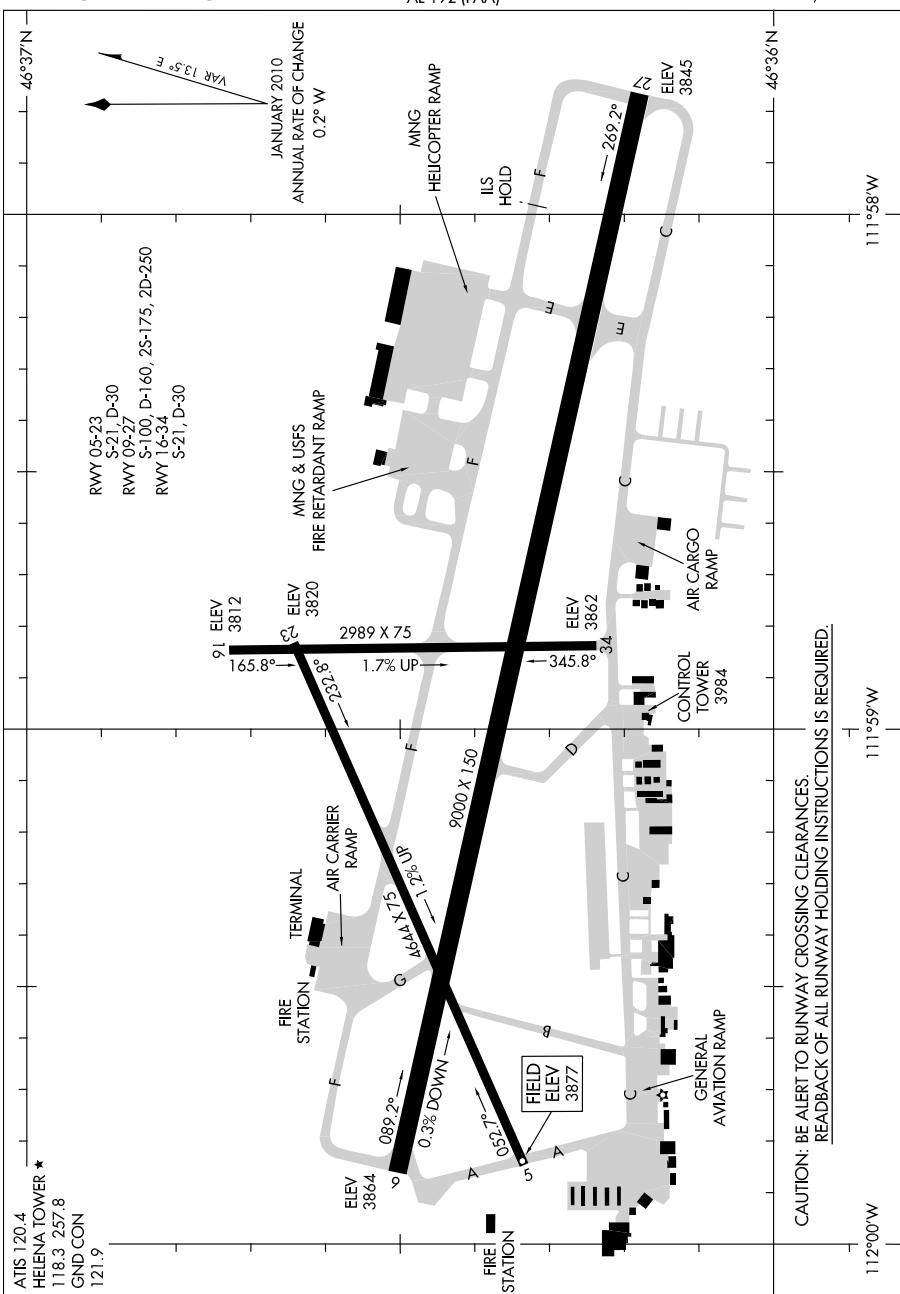

AIRPORT DIAGRAM


10210

HELENA, MONTANA
HELENA RGNL (HLN)

AIRPORT DIAGRAM

AL-590 (FAA)

IDAHO FALLS RGNL (IDA)
IDAHO FALLS, IDAHO

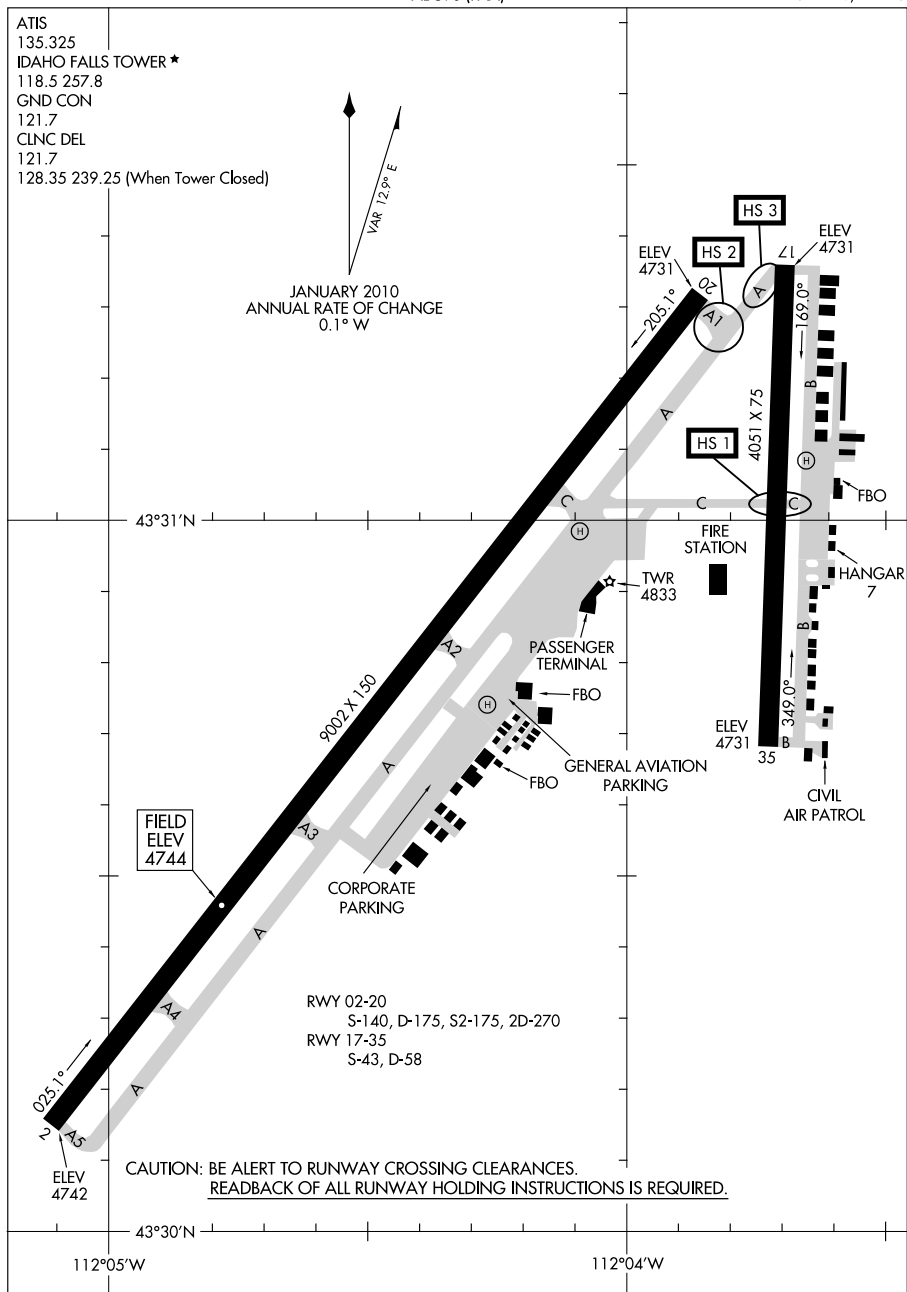

AIRPORT DIAGRAM


IDAHO FALLS, IDAHO
IDAHO FALLS RGNL (IDA)

10210

AIRPORT DIAGRAM

AL-504 (FAA)

JACKSON HOLE (JAC)
JACKSON, WYOMING

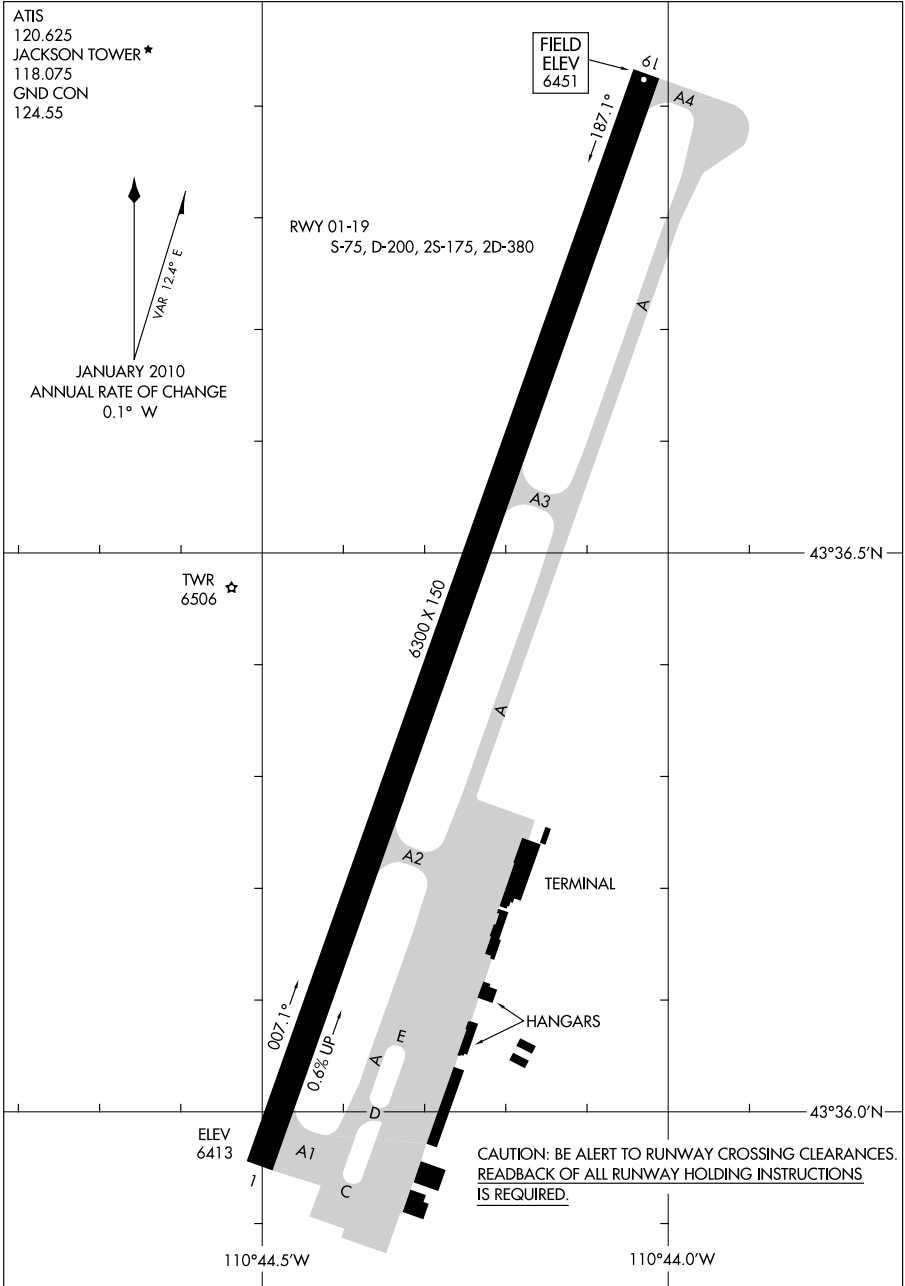

AIRPORT DIAGRAM

10210

JACKSON, WYOMING
JACKSON HOLE (JAC)

NW. 23 SEP 2010 to 18 NOV 2010


10210

AIRPORT DIAGRAM

AL-887 (FAA)

KALISPELL/GLACIER PARK INTL (GPI)

KALISPELL, MONTANA

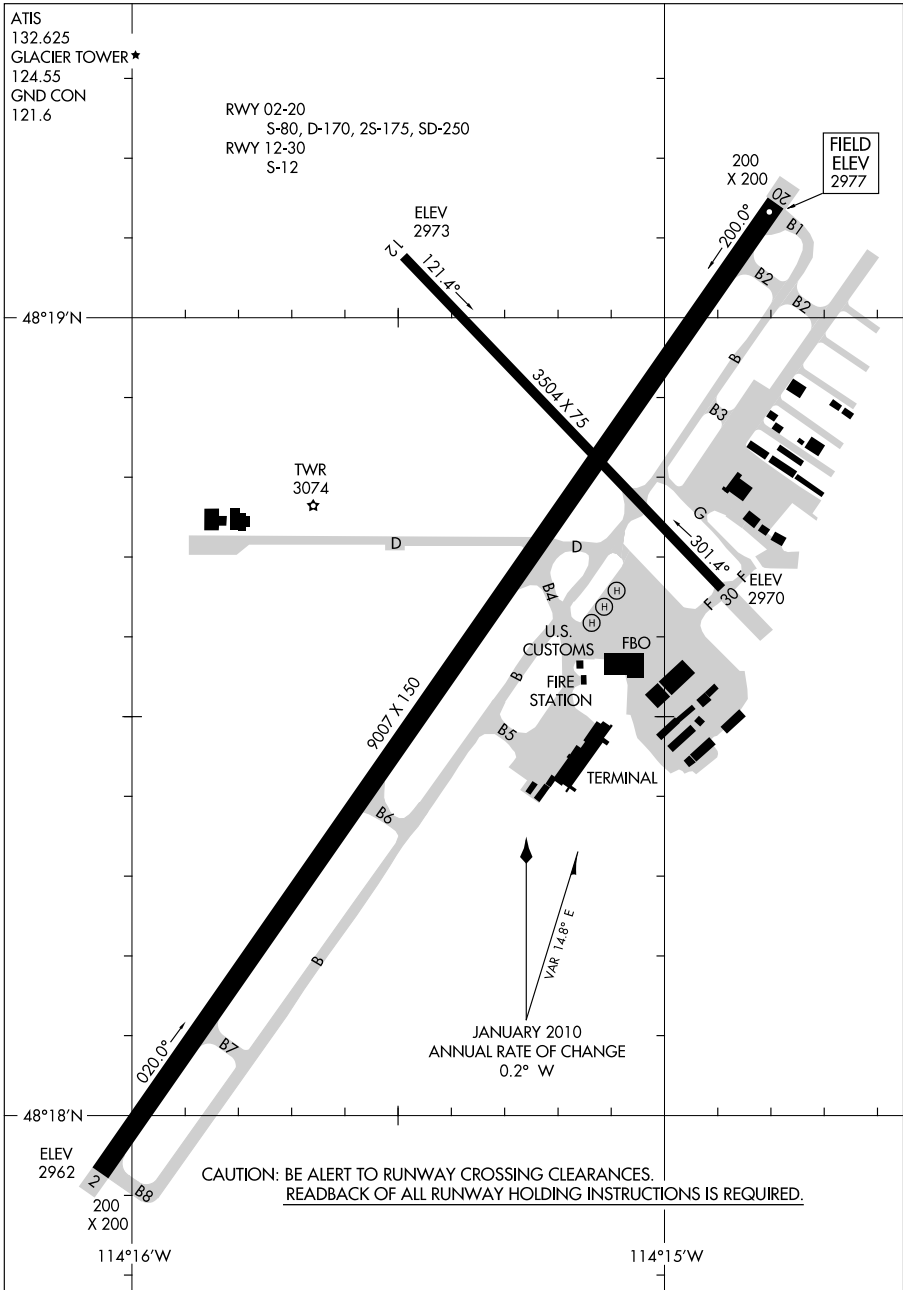

AIRPORT DIAGRAM

10210

KALISPELL, MONTANA

KALISPELL/GLACIER PARK INTL (GPI)

NW, 23 SEP 2010 to 18 NOV 2010


10210

AIRPORT DIAGRAM

AL-473 (FAA)

KLAMATH FALLS (LMT)

KLAMATH FALLS, OREGON

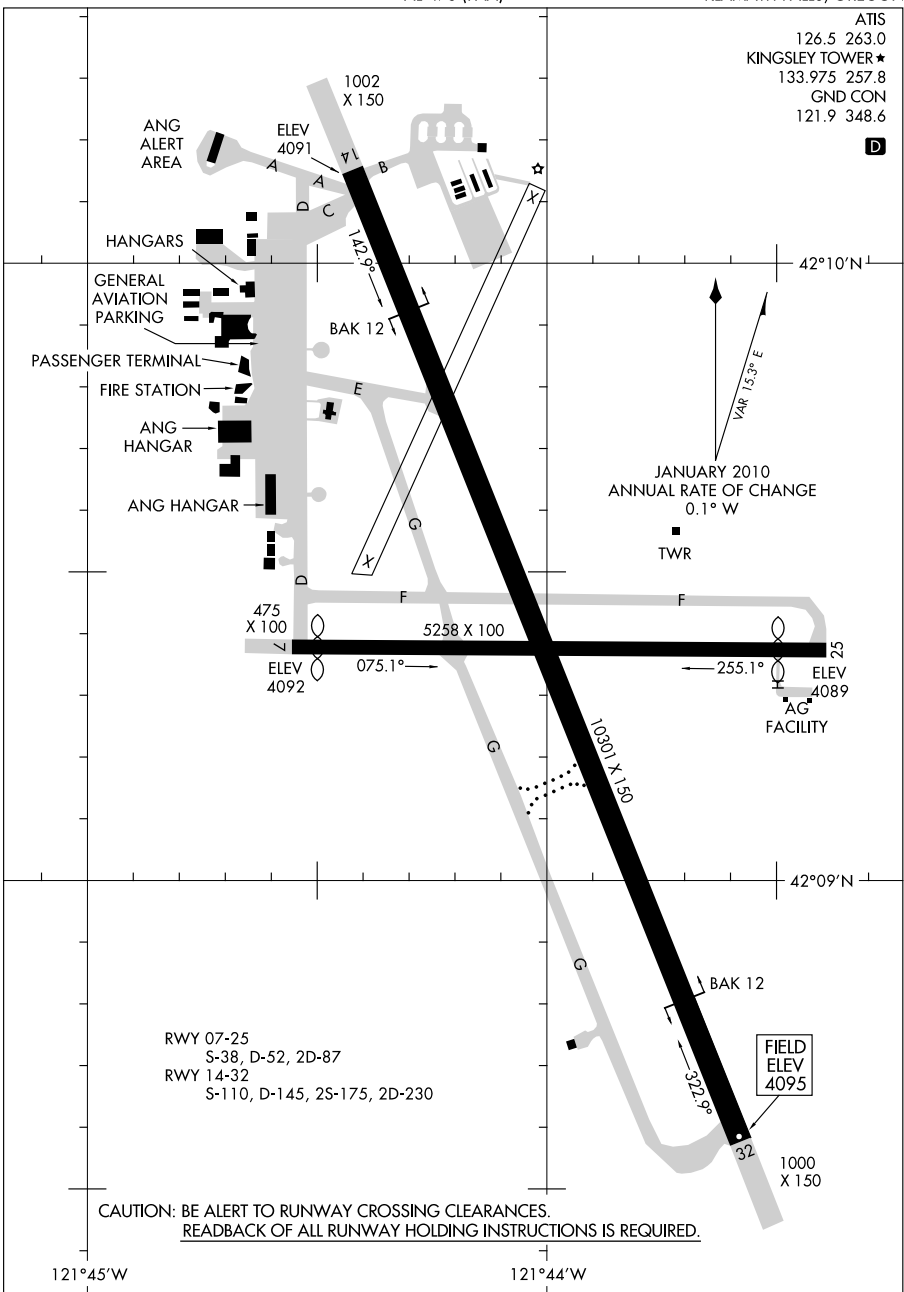

AIRPORT DIAGRAM

10210

KLAMATH FALLS, OREGON


KLAMATH FALLS (LMT)

NW. 23 SEP 2010 to 18 NOV 2010

10210
AIRPORT DIAGRAM

AL-225 (FAA)

LARAMIE RGNL (LAR)
LARAMIE, WYOMING

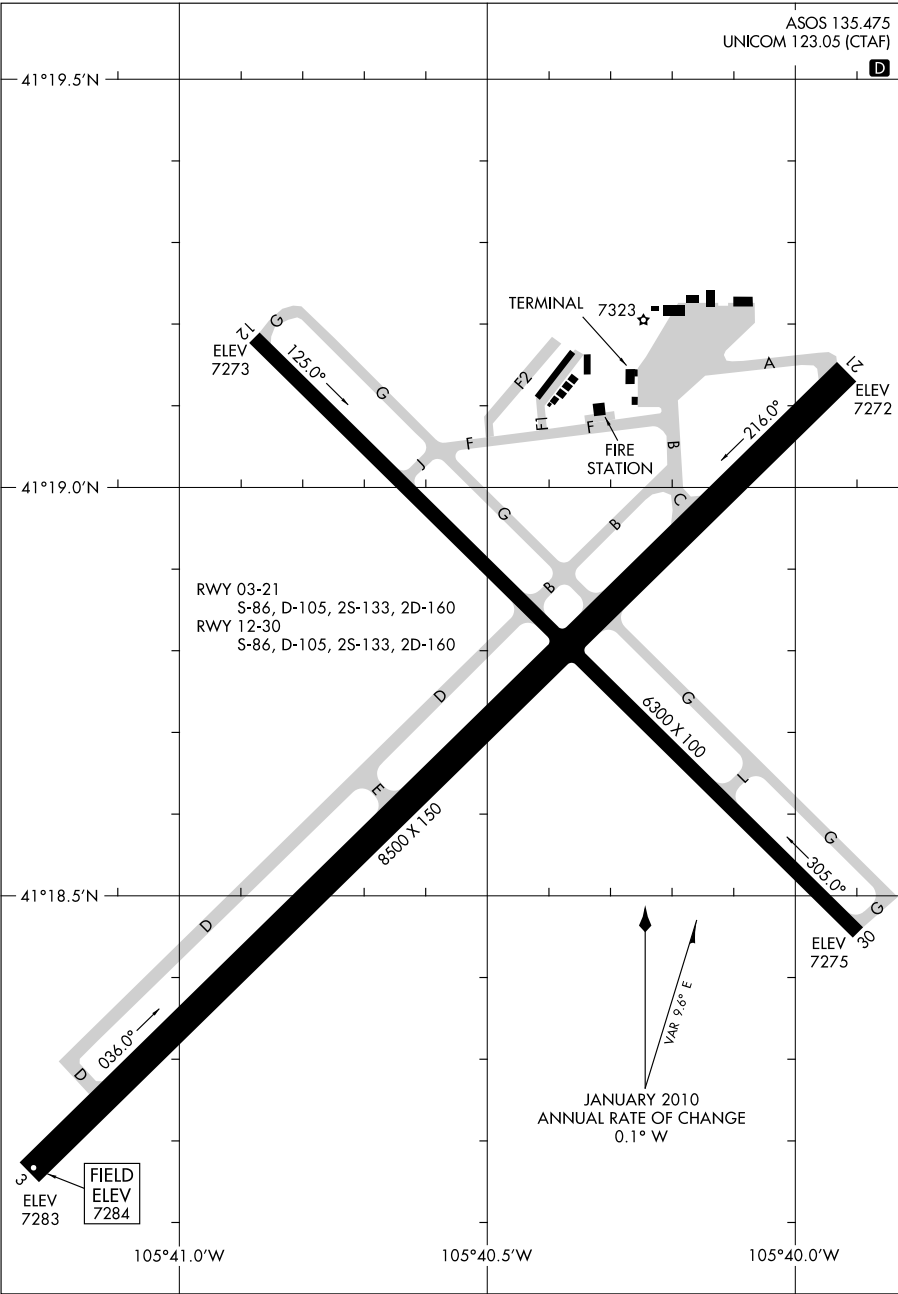


AIRPORT DIAGRAM

LARAMIE, WYOMING
LARAMIE RGNL (LAR)

10266

AIRPORT DIAGRAM

LEWISTON-NEZ PERCE COUNTY (LWS)
LEWISTON, IDAHO

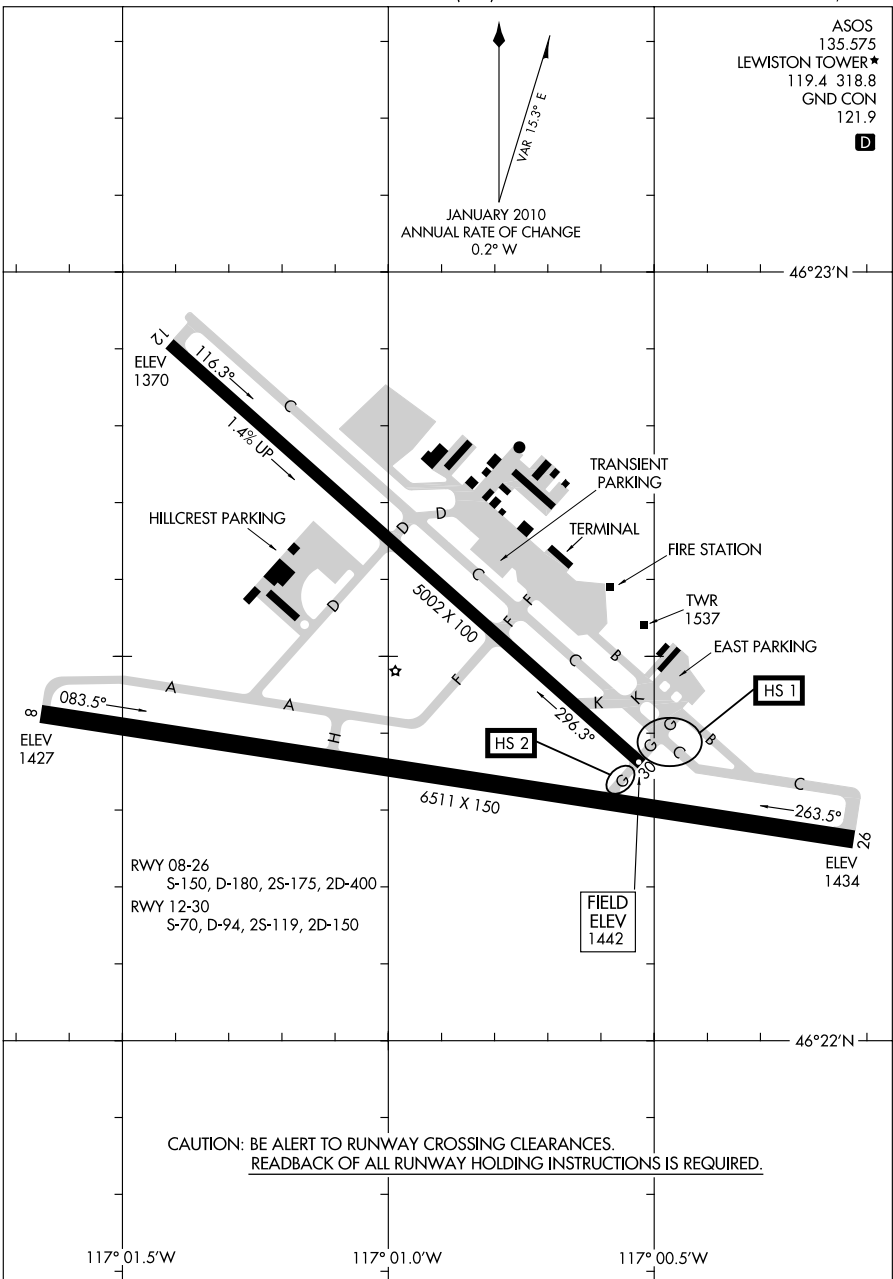

AIRPORT DIAGRAM

LEWISTON, IDAHO
LEWISTON-NEZ PERCE COUNTY (LWS)

10266

10154


AIRPORT DIAGRAM

[USAF] AFD-414

MC CHORD FIELD (KTCM)

TACOMA, WASHINGTON

ATIS 109.6 270.1
 MC CHORD TOWER
 124.8 259.3
 GND CON
 118.175 279.65

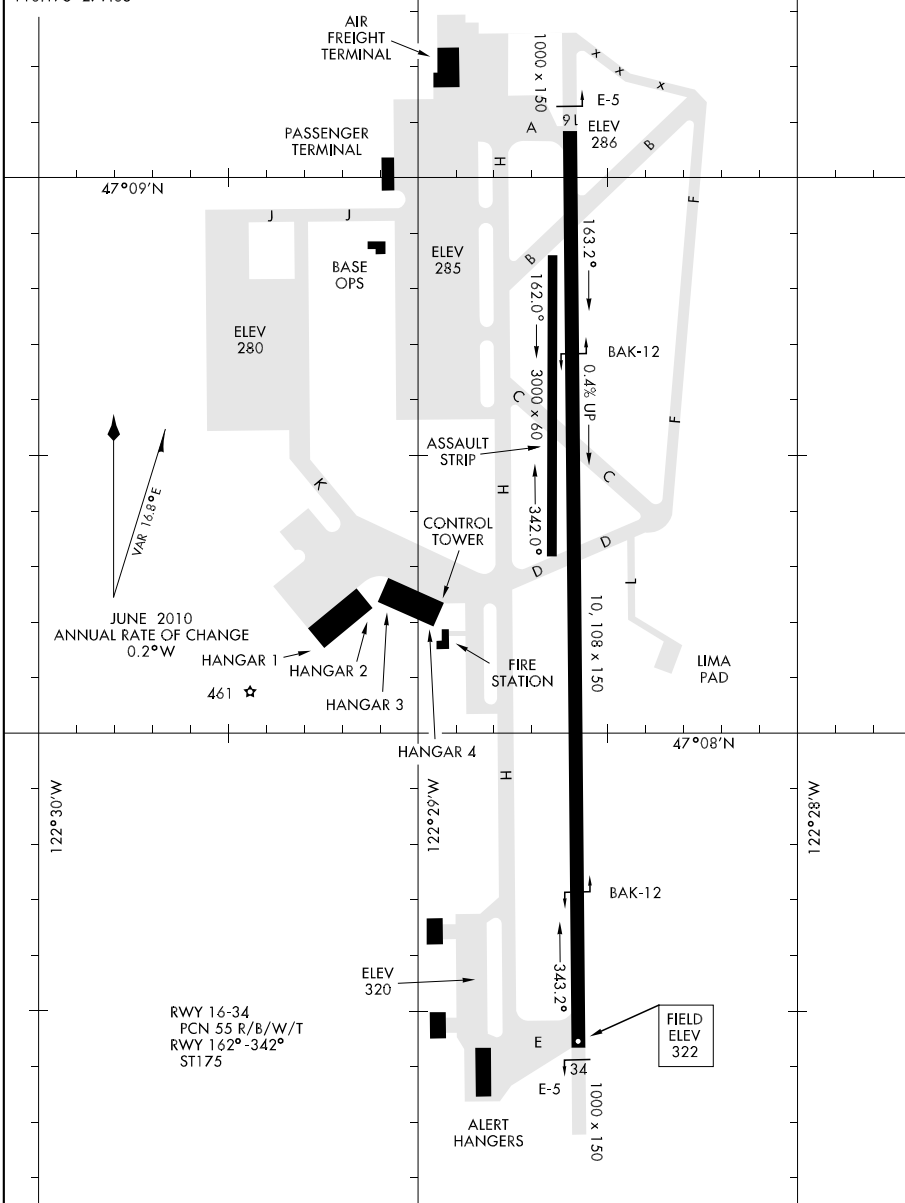


AIRPORT DIAGRAM

TACOMA, WASHINGTON

MC CHORD FIELD (KTCM)

10266

AIRPORT DIAGRAM

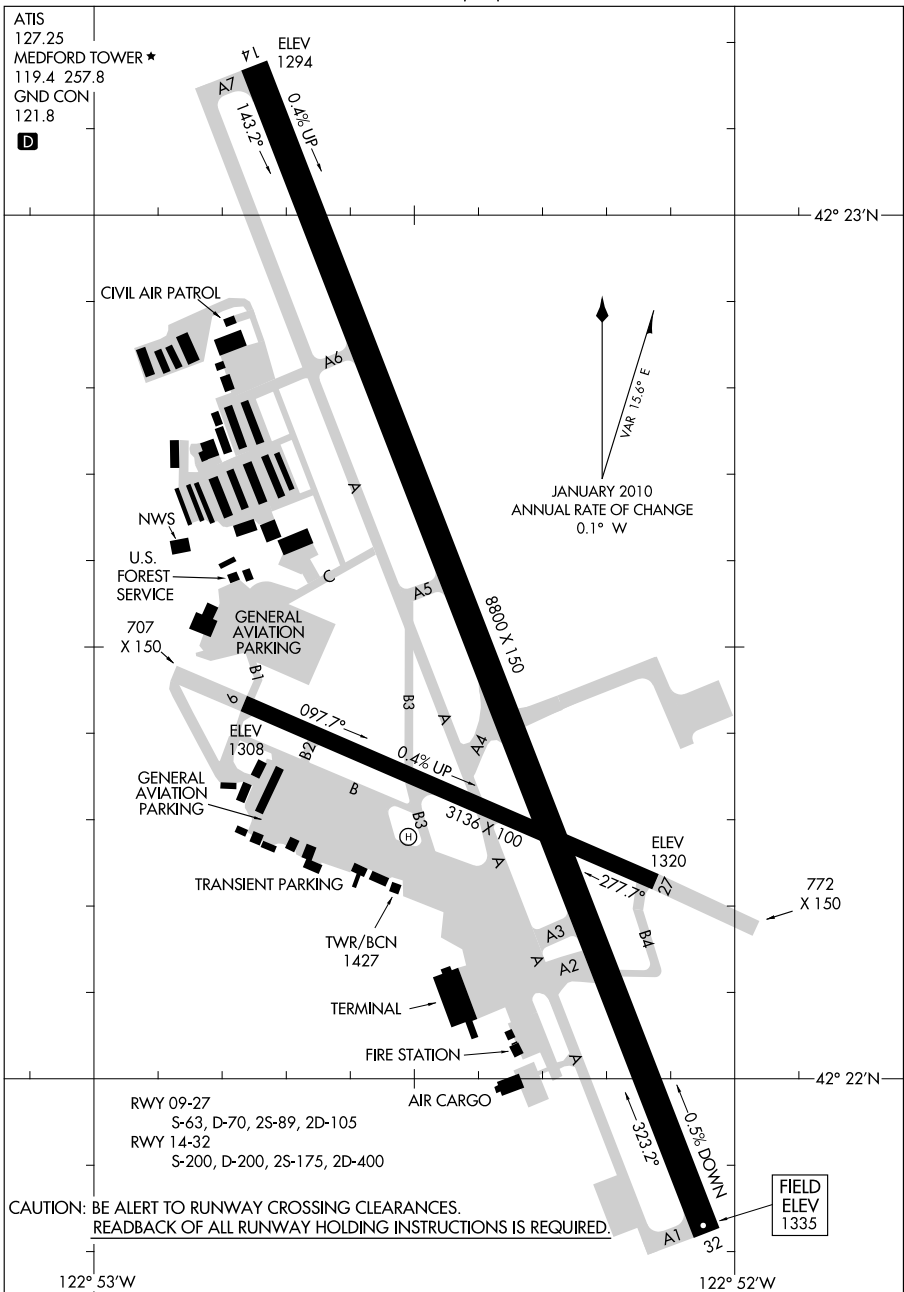MEDFORD/ ROGUE VALLEY INTL-MEDFORD (MFR)
AL-251 (FAA) MEDFORD, OREGON

AIRPORT DIAGRAM

10266


MEDFORD, OREGON
MEDFORD/ ROGUE VALLEY INTL-MEDFORD (MFR)

NW. 23 SEP 2010 to 18 NOV 2010

AIRPORT DIAGRAM

AL-266 (FAA)

MISSOULA INTL (MSO)
MISSOULA, MONTANA

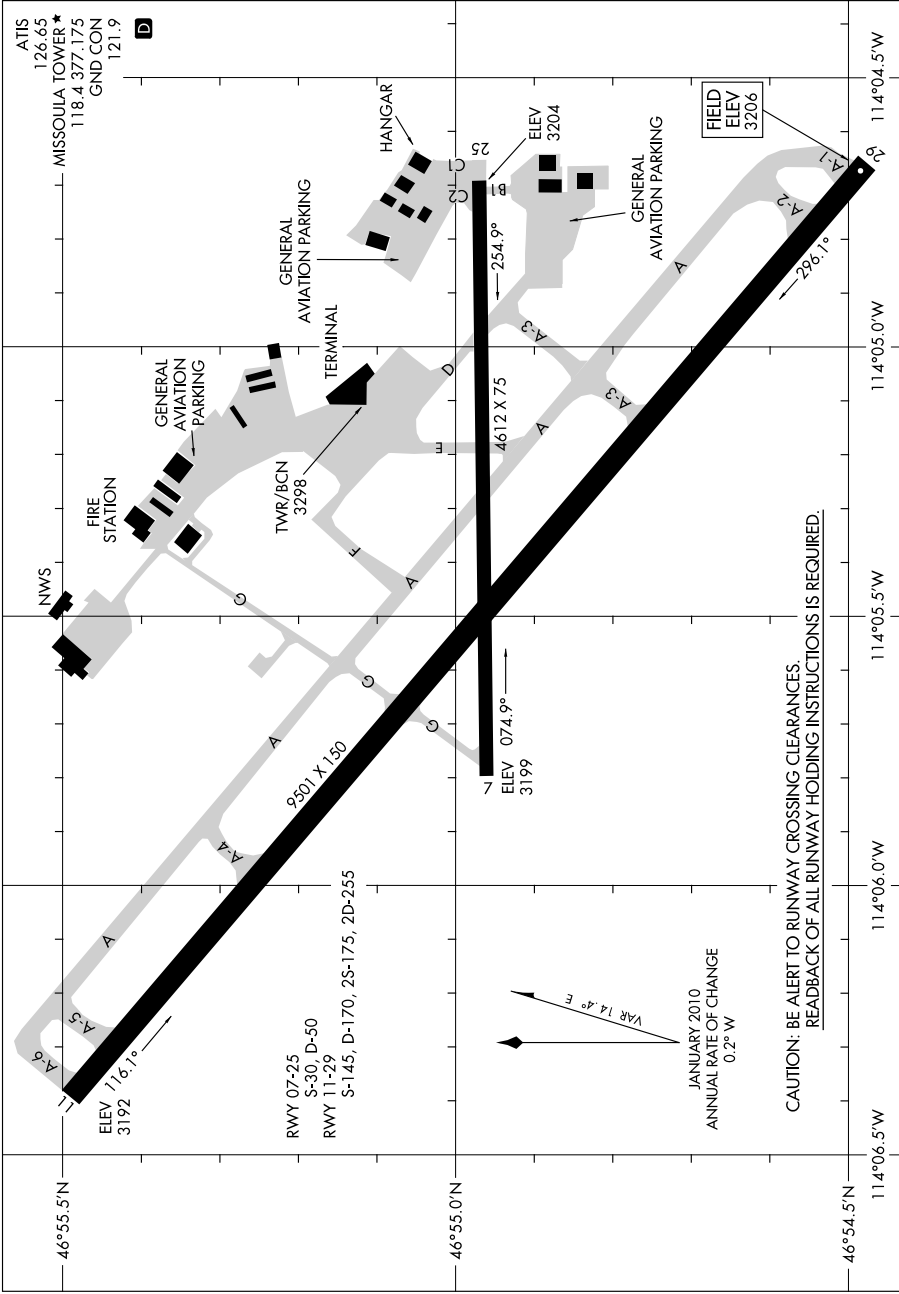

AIRPORT DIAGRAM

MISSOULA, MONTANA
MISSOULA INTL (MSO)


10210

AIRPORT DIAGRAM

AL-961 (FAA)

MOSES LAKE/GRANT COUNTY INTL (MWH)

MOSES LAKE, WASHINGTON

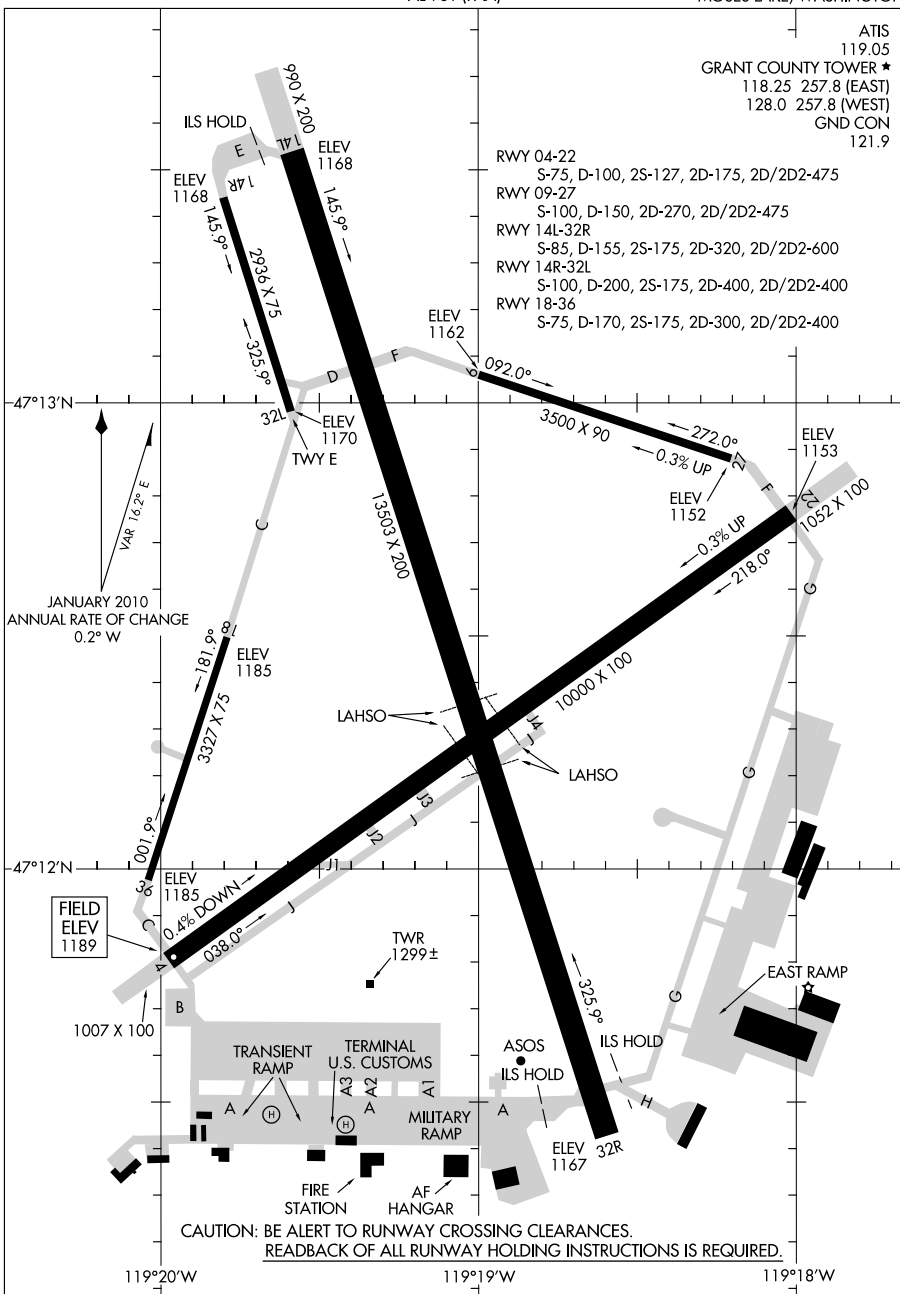

AIRPORT DIAGRAM

10210

NW. 23 SEP 2010 to 18 NOV 2010


08101

AIRPORT DIAGRAM

AFD-323 [USAF]

MOUNTAIN HOME AFB (KMUO)

MOUNTAIN HOME, IDAHO

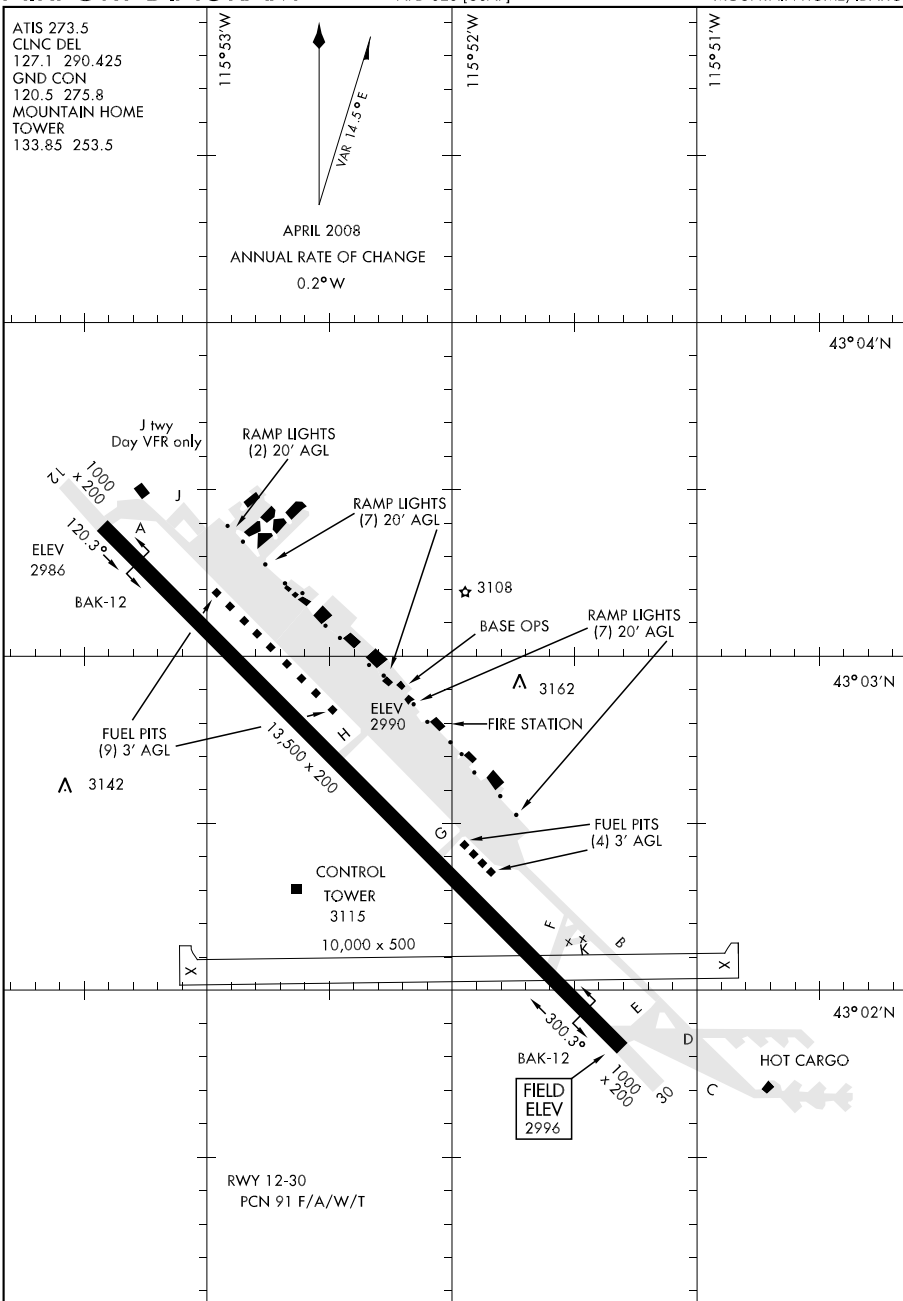

AIRPORT DIAGRAM


MOUNTAIN HOME, IDAHO
MOUNTAIN HOME AFB (KMUO)

NW, 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM

NORTH BEND/SOUTHWEST OREGON RGNL (OTH)
AL-929 (FAA) NORTH BEND, OREGON

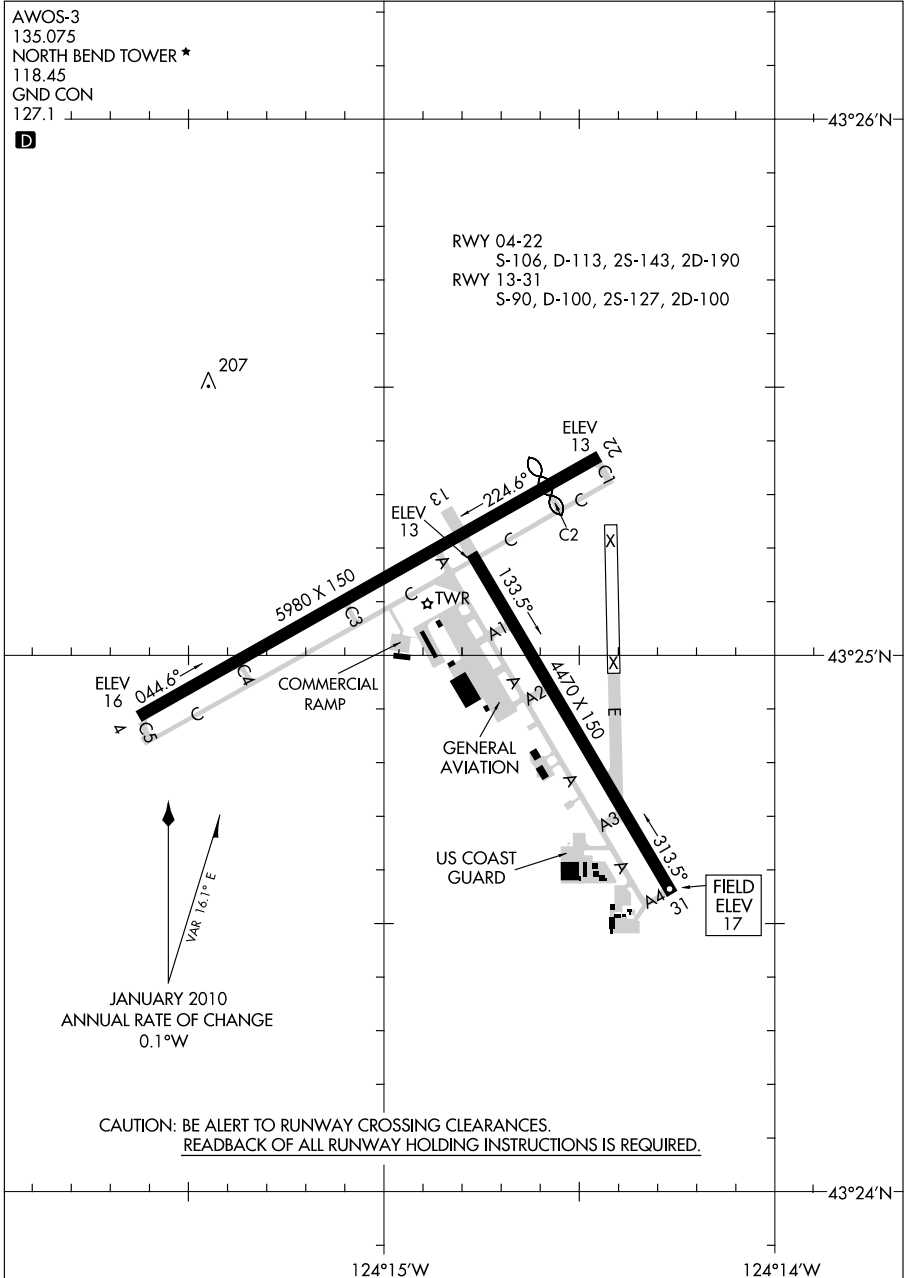

AIRPORT DIAGRAM

10210

NORTH BEND, OREGON
NORTH BEND/SOUTHWEST OREGON RGNL (OTH)

NW. 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM

AL-645 (FAA)

OLYMPIA RGNL (OLM)
OLYMPIA, WASHINGTON

ATIS
135.725
OLYMPIA TOWER★
124.4 254.25
GND CON
121.6

RWY 08-26
S-30
RWY 17-35
S-75, D-94, 2S-87, 2D-142

The diagram illustrates the layout of the airport, showing the runway, taxiway, and various facilities. The facilities are labeled as follows:

- HANGAR
- FBO
- TRANSIENT TIEDOWNS
- MUSEUM
- AIRPORT OFFICE
- FBO

S
HANGARS

ELEV
204

26

JANUARY 2010
ANNUAL RATE OF CHANGE
0.2° W

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

122° 54.5'W

122° 54.0'W

122° 53.5'W

AIRPORT DIAGRAM

10210

OLYMPIA, WASHINGTON
OLYMPIA RGNL (OLM)

NW, 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM


AL-474 (FAA)

PASCO/TRI-CITIES (PSC)
PASCO, WASHINGTON

ATIS 125.65
TRI-CITIES TOWER 135.3 323.3
GND CON 121.8
CLNC DEL 120.0
D

JANUARY 2010
ANNUAL RATE OF CHANGE
0.2° W

RWY 03L-21R
S-120, D-170, 2S-175, 2D-320
RWY 03R-21L
S-52, D-85, 2S-108, 2D-150
RWY 12-30
S-150, D-200, 2S-175, 2D-400

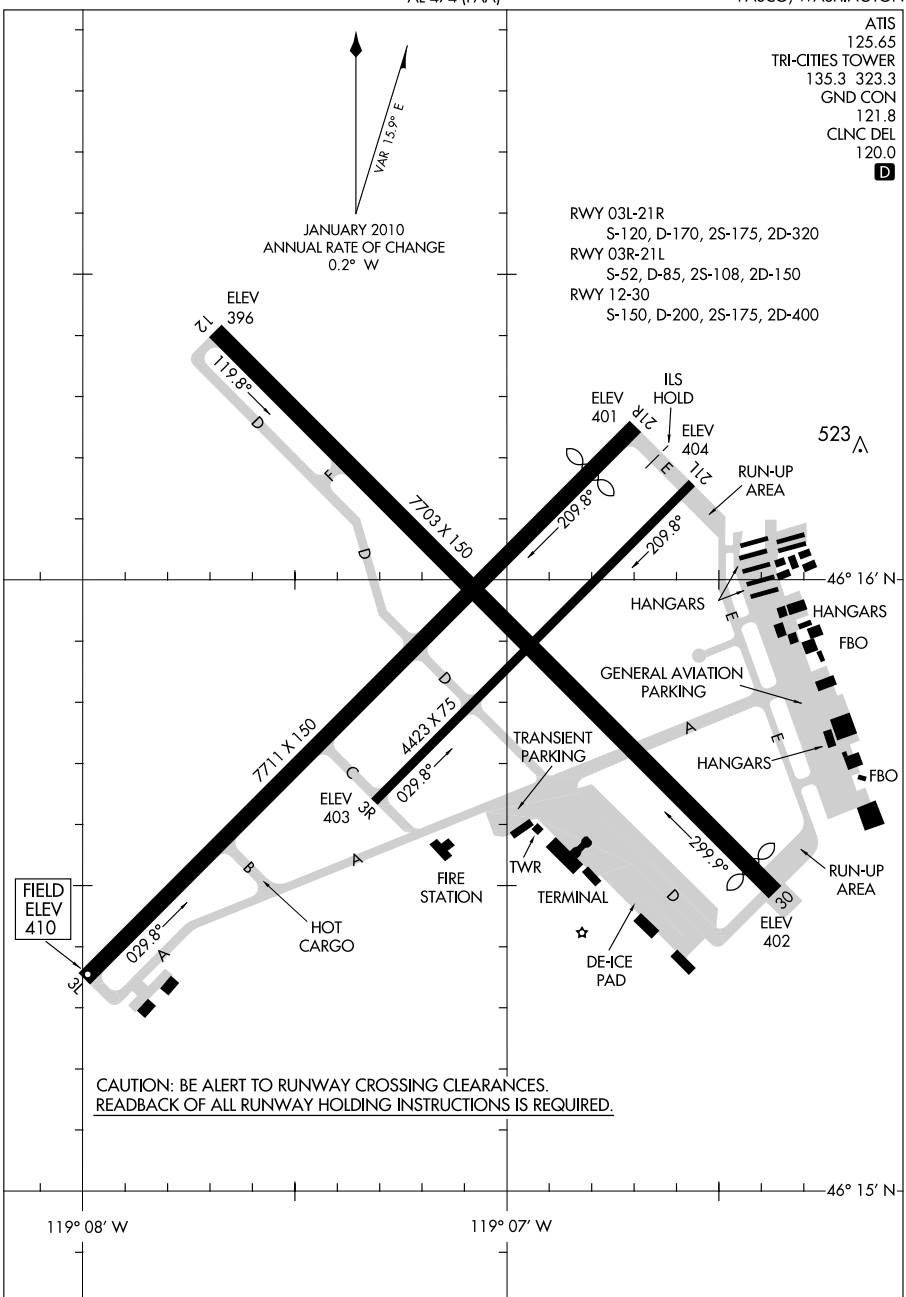

AIRPORT DIAGRAM


10210

PASCO, WASHINGTON
PASCO/TRI-CITIES (PSC)

NW, 23 SEP 2010 to 18 NOV 2010

10210
AIRPORT DIAGRAM

PENDLETON/ EASTERN OREGON RGNL AT PENDLETON (PDT)
AL-316 (FAA) PENDLETON, OREGON

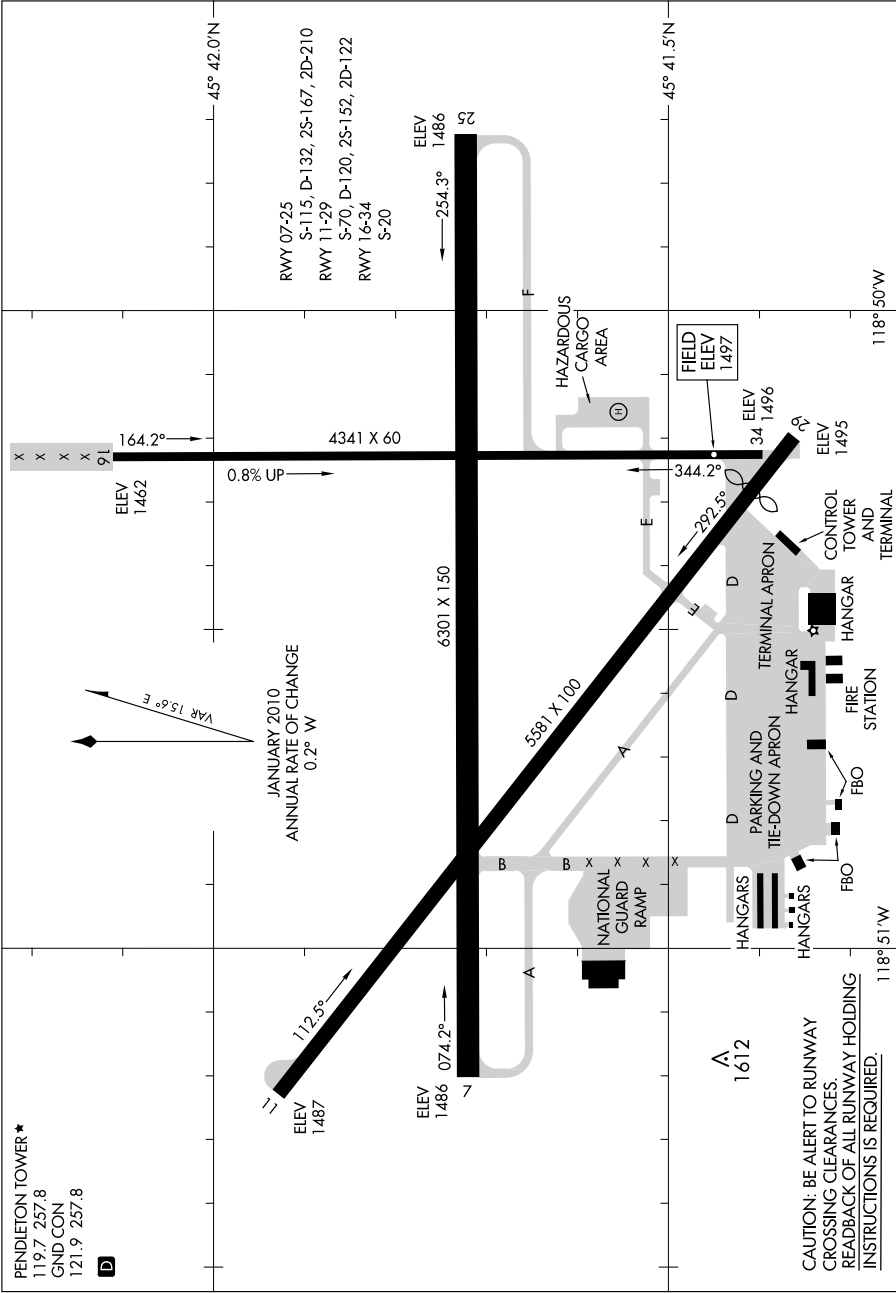


AIRPORT DIAGRAM
10210

PENDLETON, OREGON
PENDLETON/ EASTERN OREGON RGNL AT PENDLETON (PDT)

10210

AIRPORT DIAGRAM

POCATELLO RGNL (PIH)
POCATELLO, IDAHO

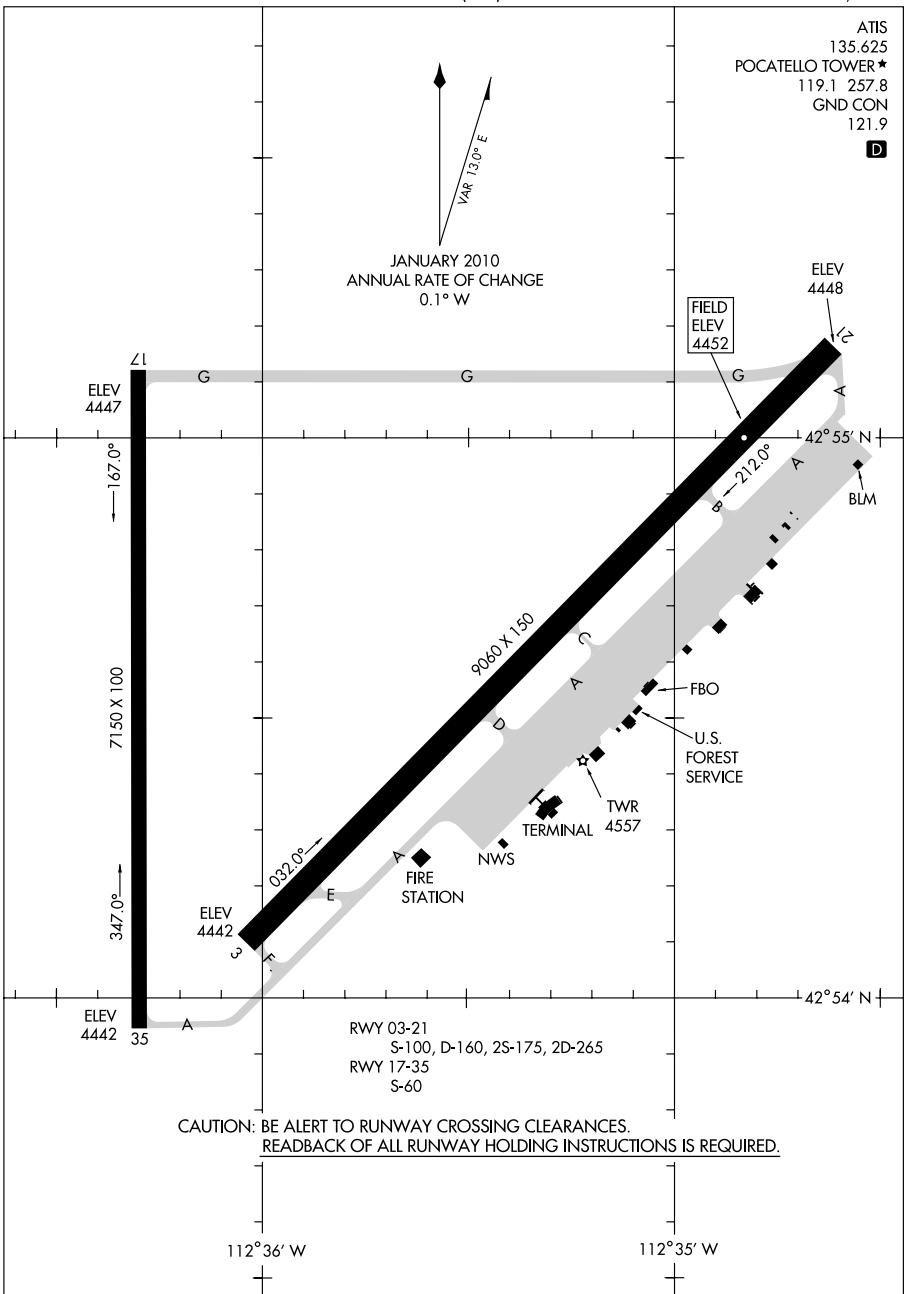


AIRPORT DIAGRAM

POCATELLO, IDAHO
POCATELLO RGNL (PIH)

10210

NW. 23 SEP 2010 to 18 NOV 2010

AL-330 (FAA)




PORTLAND INTL (PDX)

10210

AIRPORT DIAGRAM

AL-5063 (FAA)

PORTLAND-HILLSBORO (HIO)
PORTLAND, OREGON

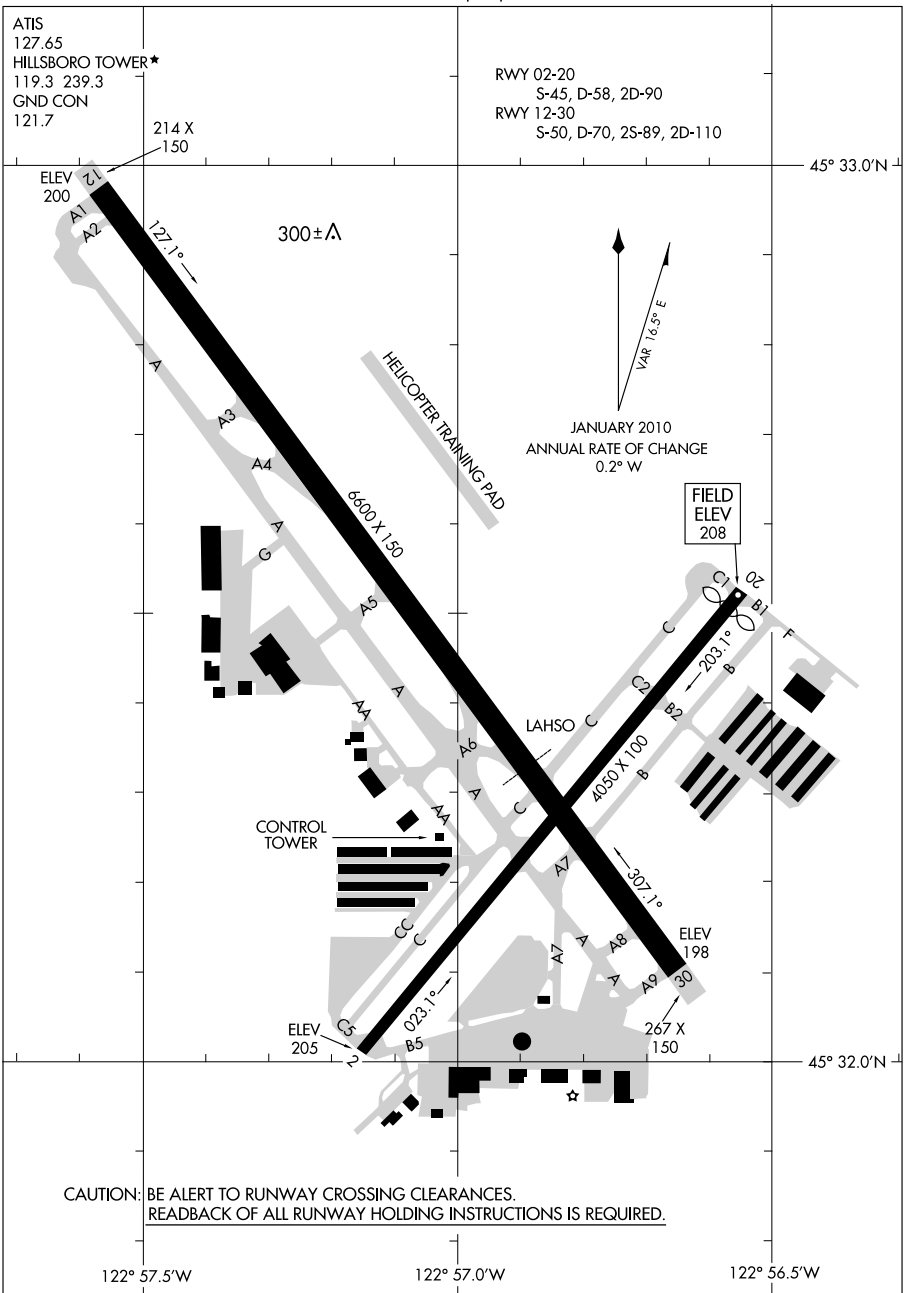

AIRPORT DIAGRAM

10210

PORTLAND, OREGON
PORTLAND-HILLSBORO (HIO)


NW. 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM

AL-649 (FAA)

PORTLAND-TROUTDALE (TTD)
PORTLAND, OREGON

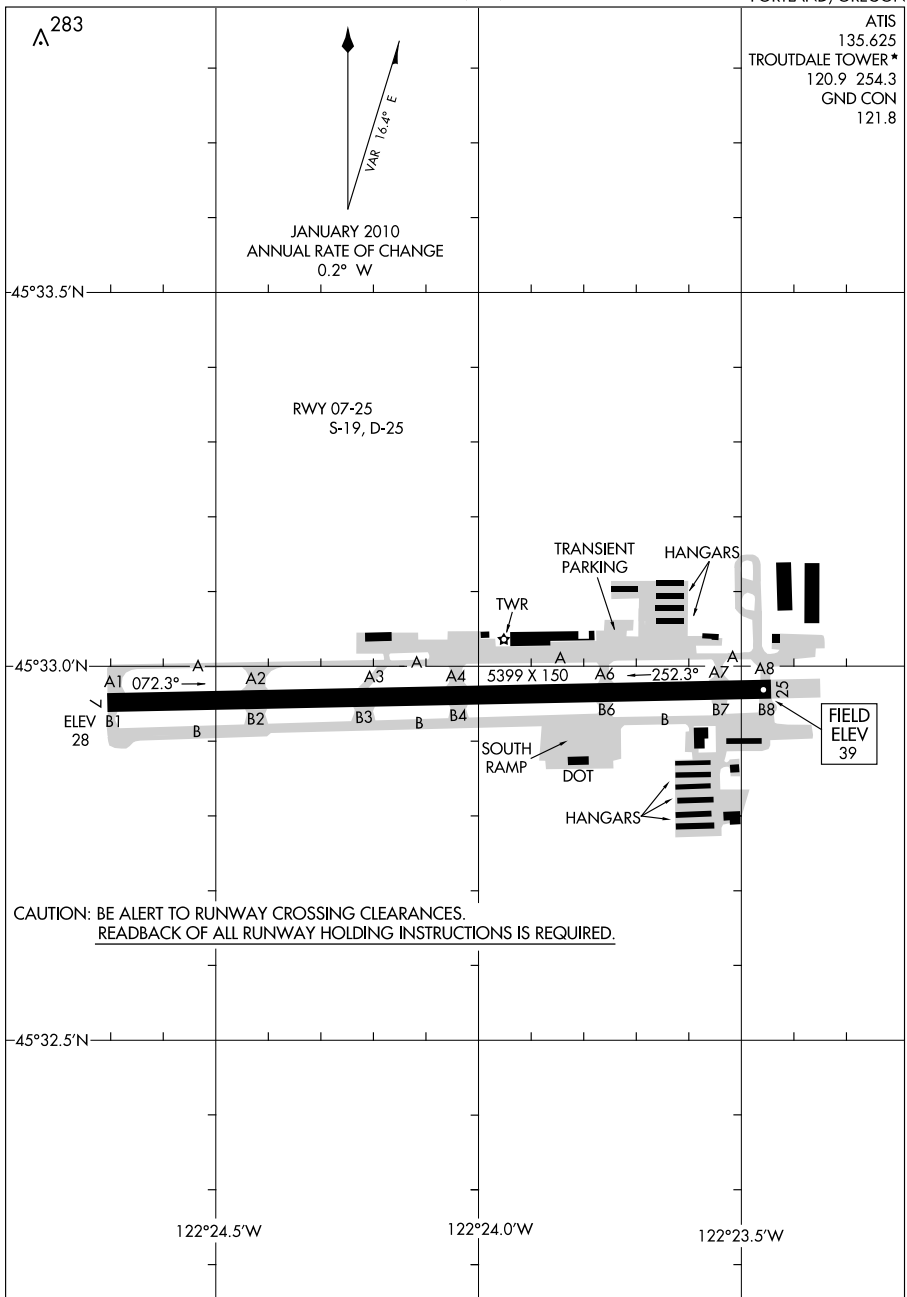

AIRPORT DIAGRAM


10210

PORTLAND, OREGON
PORTLAND-TROUTDALE (TTD)

10266

AIRPORT DIAGRAM

AL-345 (FAA)

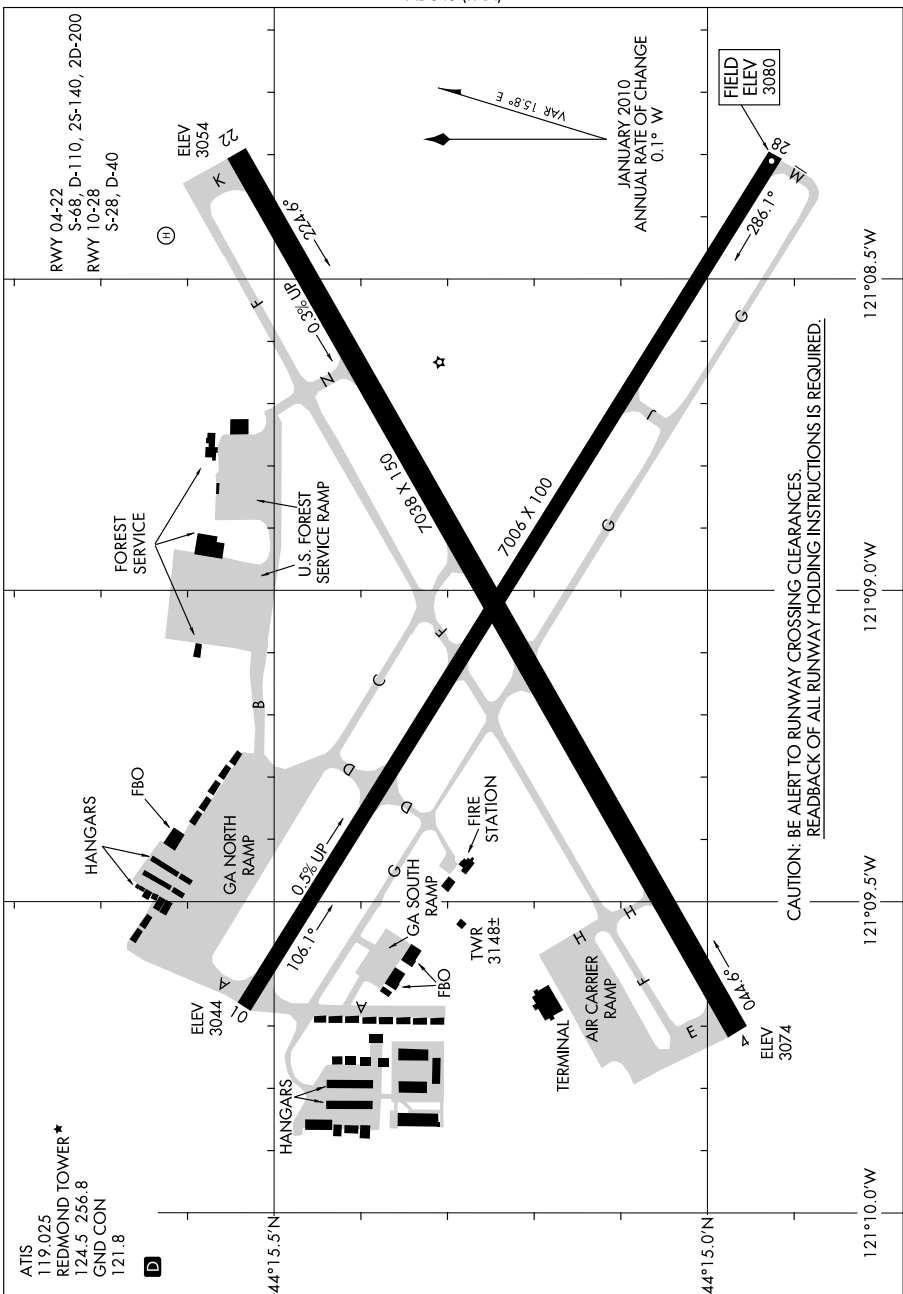REDMOND/ ROBERTS FIELD (RDM)
REDMOND, OREGON

AIRPORT DIAGRAM

10266

REDMOND, OREGON
REDMOND/ ROBERTS FIELD (RDM)


NW. 23 SEP 2010 to 18 NOV 2010

AIRPORT DIAGRAM

ATIS
126.95
RENTON TOWER ★
124.7 256.9
GND CON
121.6 256.9

AL-5396 (FAA)

RENTON MUNI (R.NT)
RENTON, WASHINGTON

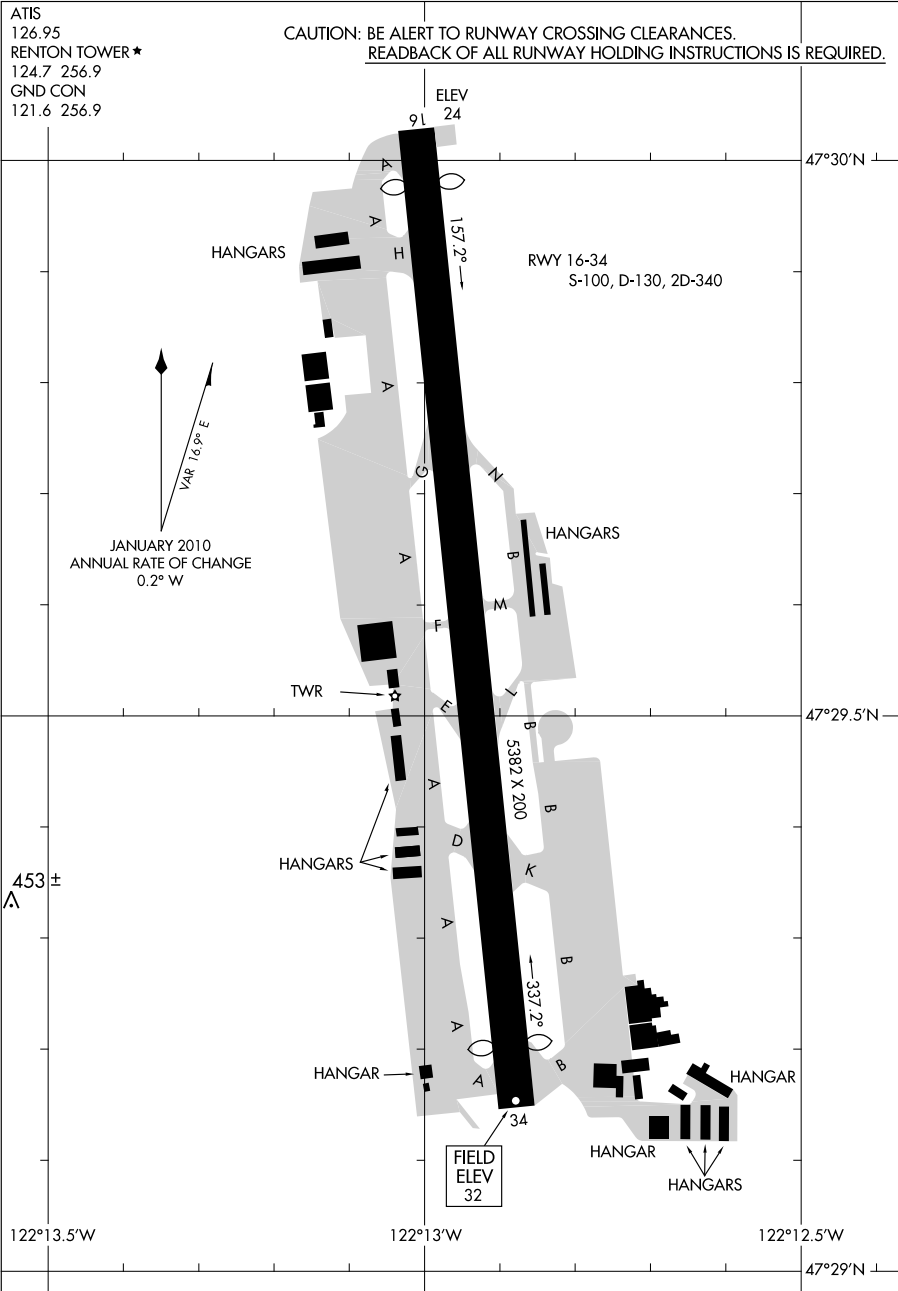

AIRPORT DIAGRAM

10210

RENTON, WASHINGTON
RENTON MUNI (R.NT)


10266

AIRPORT DIAGRAM

AL-361 (FAA)

SALEM/MCNARY FIELD (SLE)

SALEM, OREGON

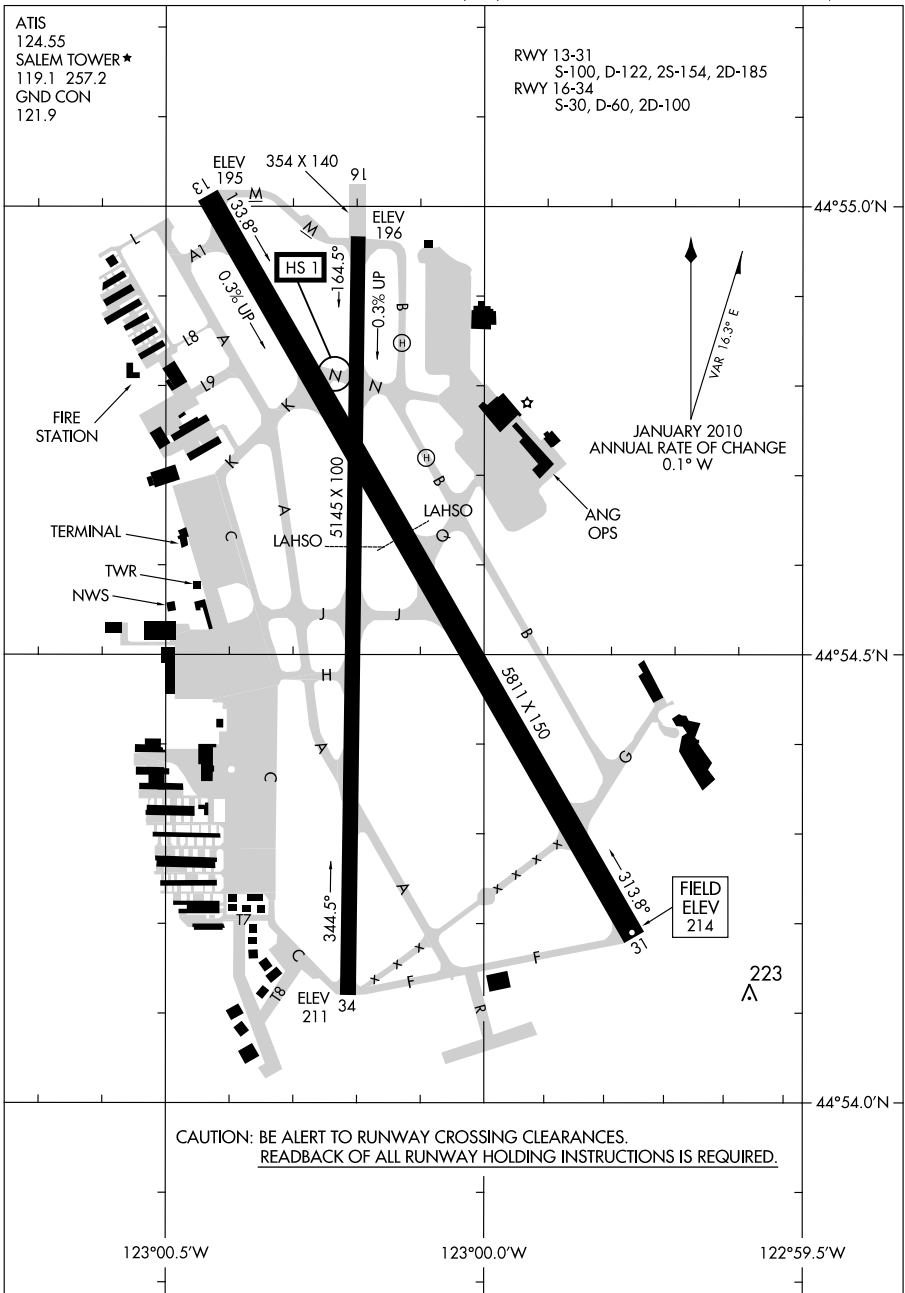

AIRPORT DIAGRAM

10266


SALEM, OREGON

SALEM/MCNARY FIELD (SLE)

10266

AIRPORT DIAGRAM

SEATTLE/BOEING FIELD/KING COUNTY INTL (BFI)
AL-384 (FAA) SEATTLE, WASHINGTON

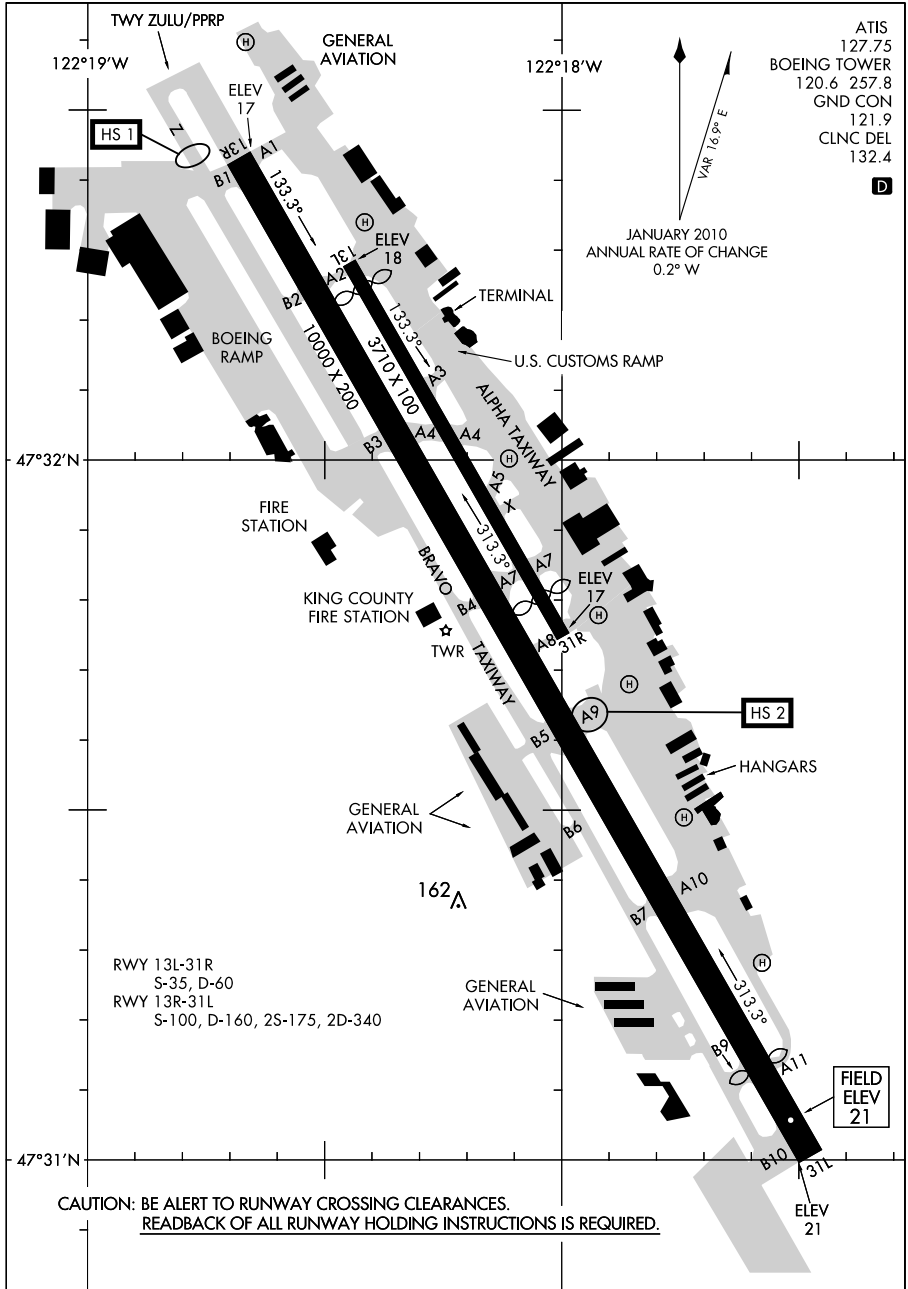

AIRPORT DIAGRAM

SEATTLE, WASHINGTON
SEATTLE/BOEING FIELD/KING COUNTY INTL (BFI)

10266


NW. 23 SEP 2010 to 18 NOV 2010

10266

AIRPORT DIAGRAM

AL-582 (FAA)

SEATTLE-TACOMA INTL (SEA)
SEATTLE, WASHINGTON

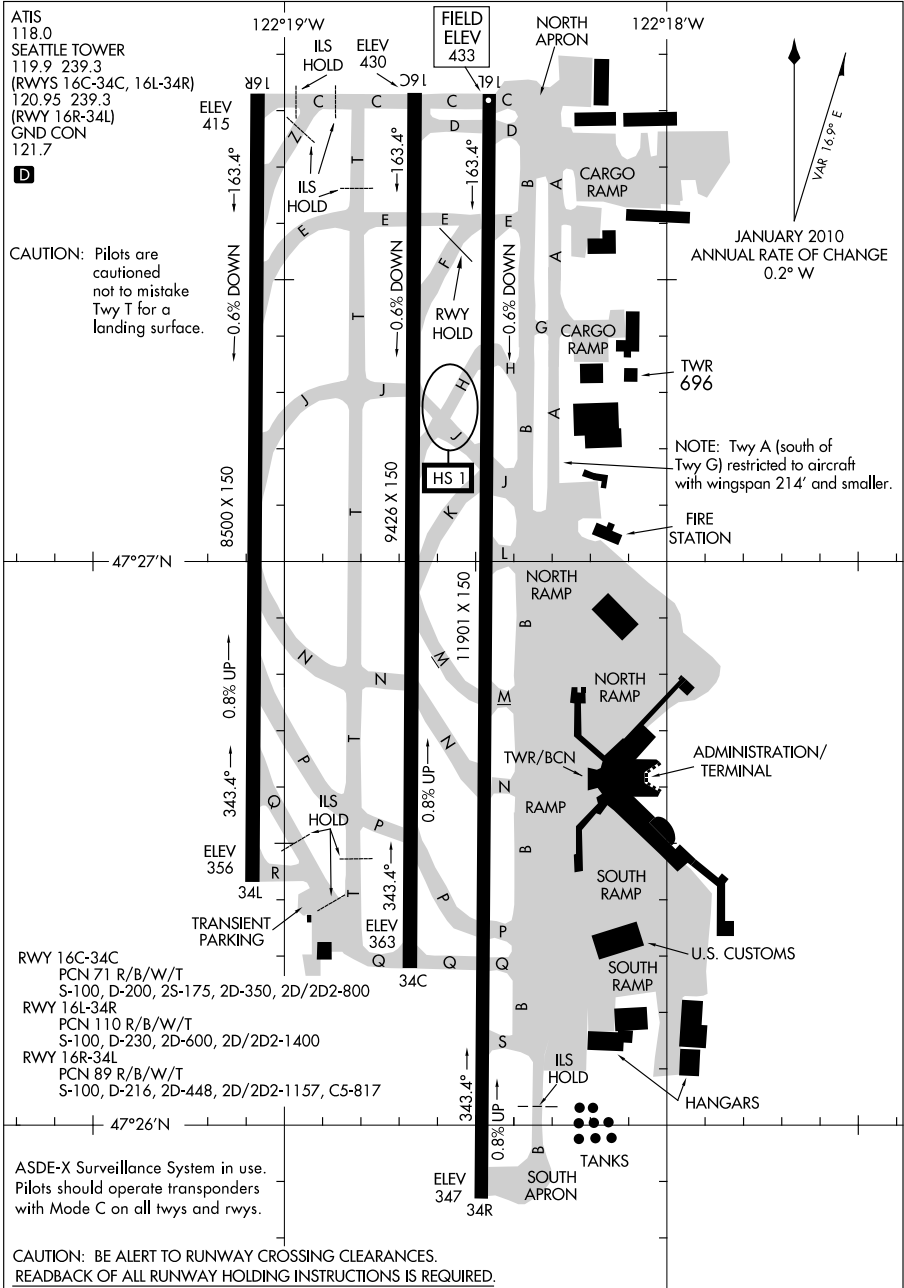

AIRPORT DIAGRAM

10266


SEATTLE, WASHINGTON
SEATTLE-TACOMA INTL (SEA)

10266

AIRPORT DIAGRAM

AL-403 (FAA)

SPOKANE INTL (GEG)
SPOKANE, WASHINGTON

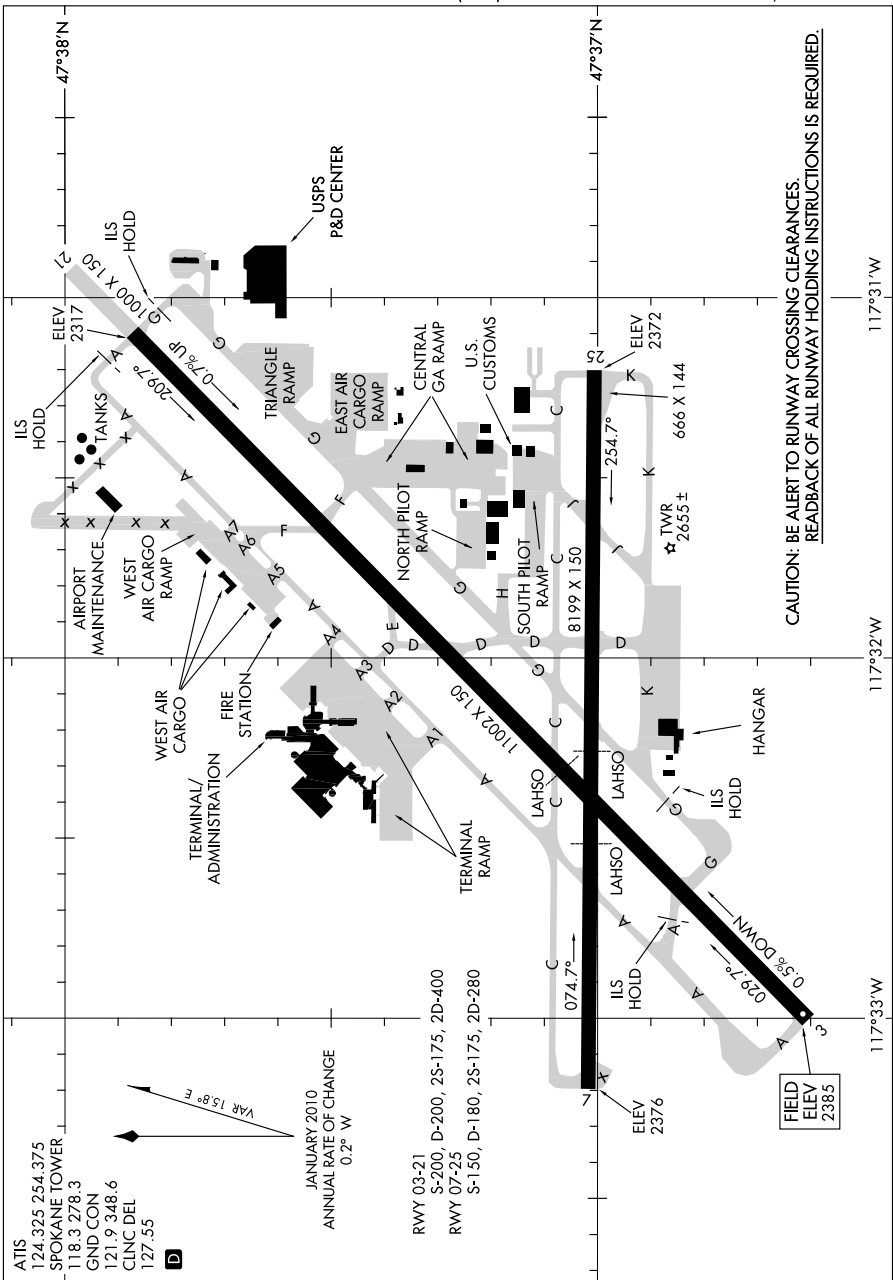

AIRPORT DIAGRAM

SPOKANE, WASHINGTON
SPOKANE INTL (GEG)

10266


10210

AIRPORT DIAGRAM

AL-5186 (FAA)

TACOMA NARROWS (TIW)

TACOMA, WASHINGTON

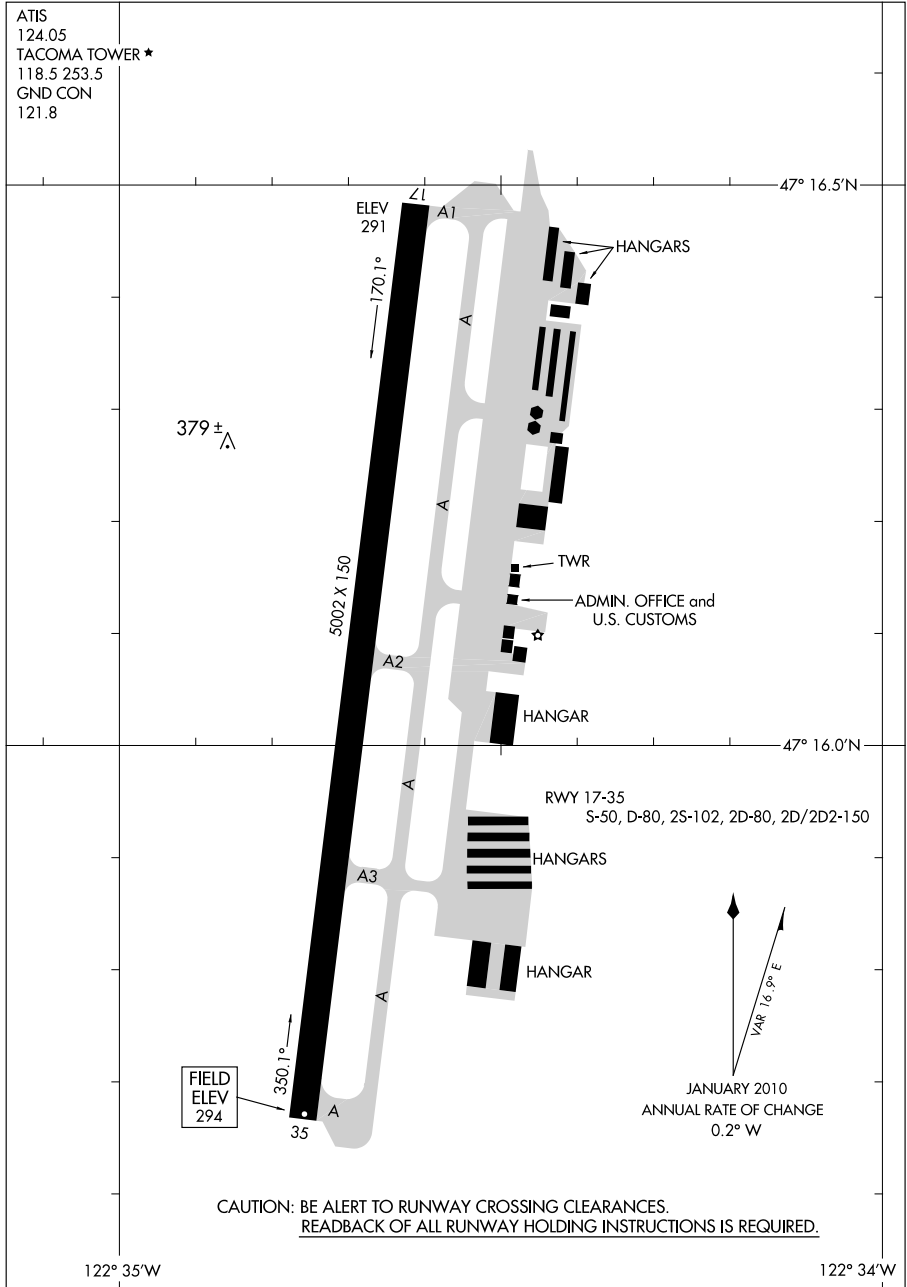

AIRPORT DIAGRAM

10210

TACOMA, WASHINGTON

TACOMA NARROWS (TIW)


NW. 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM

TWIN FALLS/JOSLIN FIELD-MAGIC VALLEY RGNL (TWF)
AL-885 (FAA)

TWIN FALLS, IDAHO

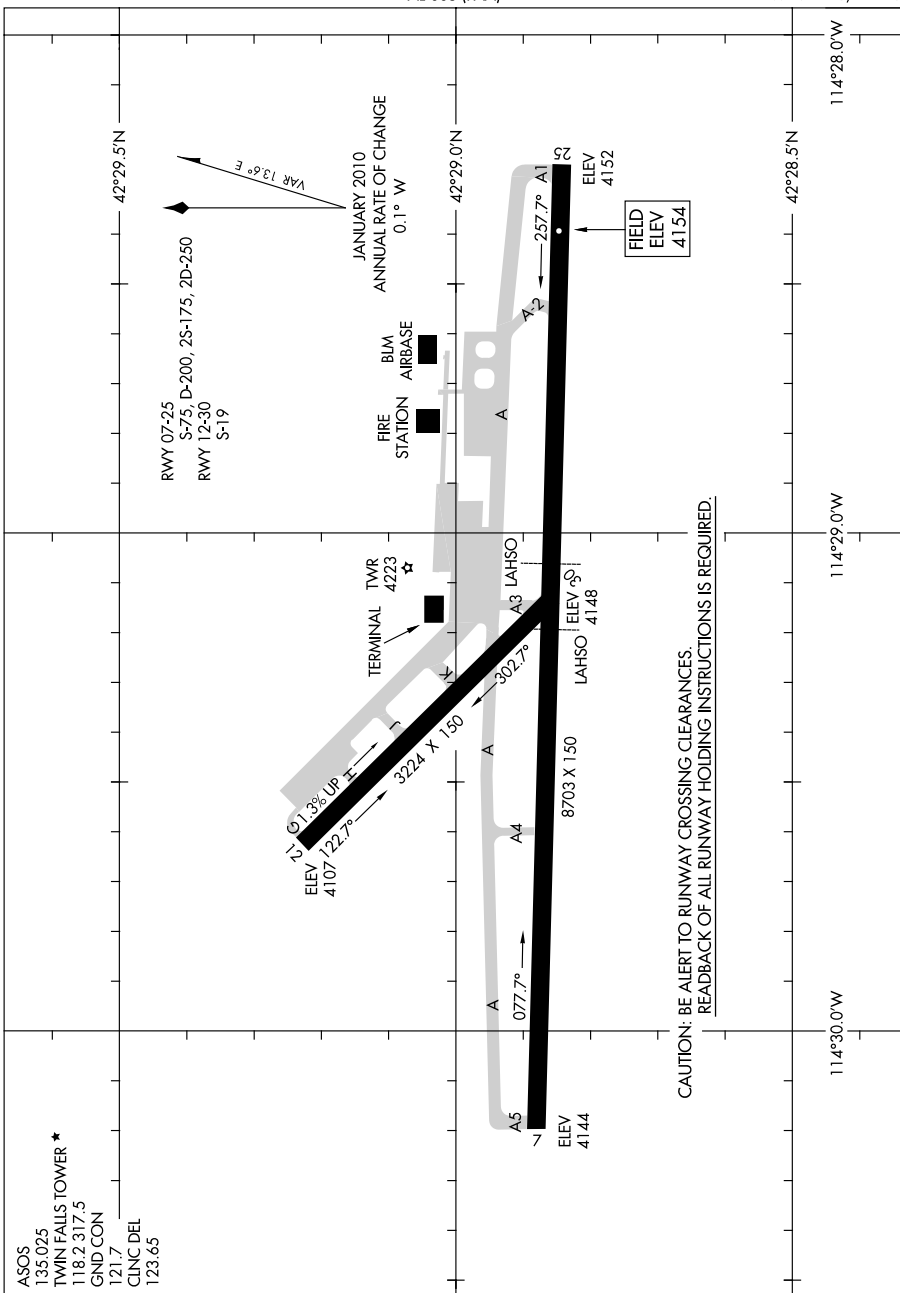


AIRPORT DIAGRAM

TWIN FALLS/JOSLIN FIELD-MAGIC VALLEY RGNL (TWF)
TWIN FALLS, IDAHO

10210


AIRPORT DIAGRAM

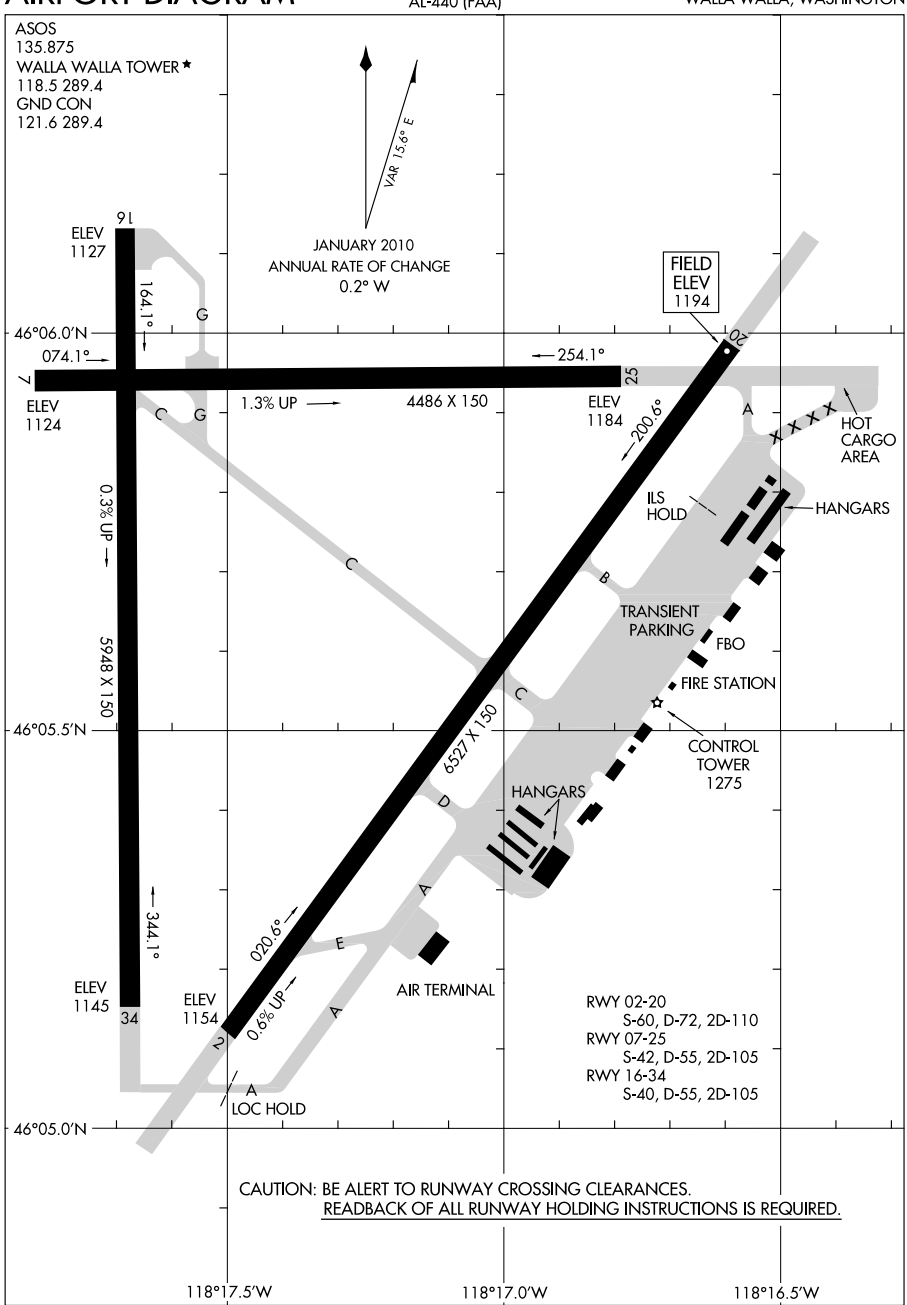

AIRPORT DIAGRAM

AIRPORT DIAGRAM

YAKIMA AIR TERMINAL/MCALLISTER FIELD (YKM)
AL-465 (FAA) YAKIMA, WASHINGTON

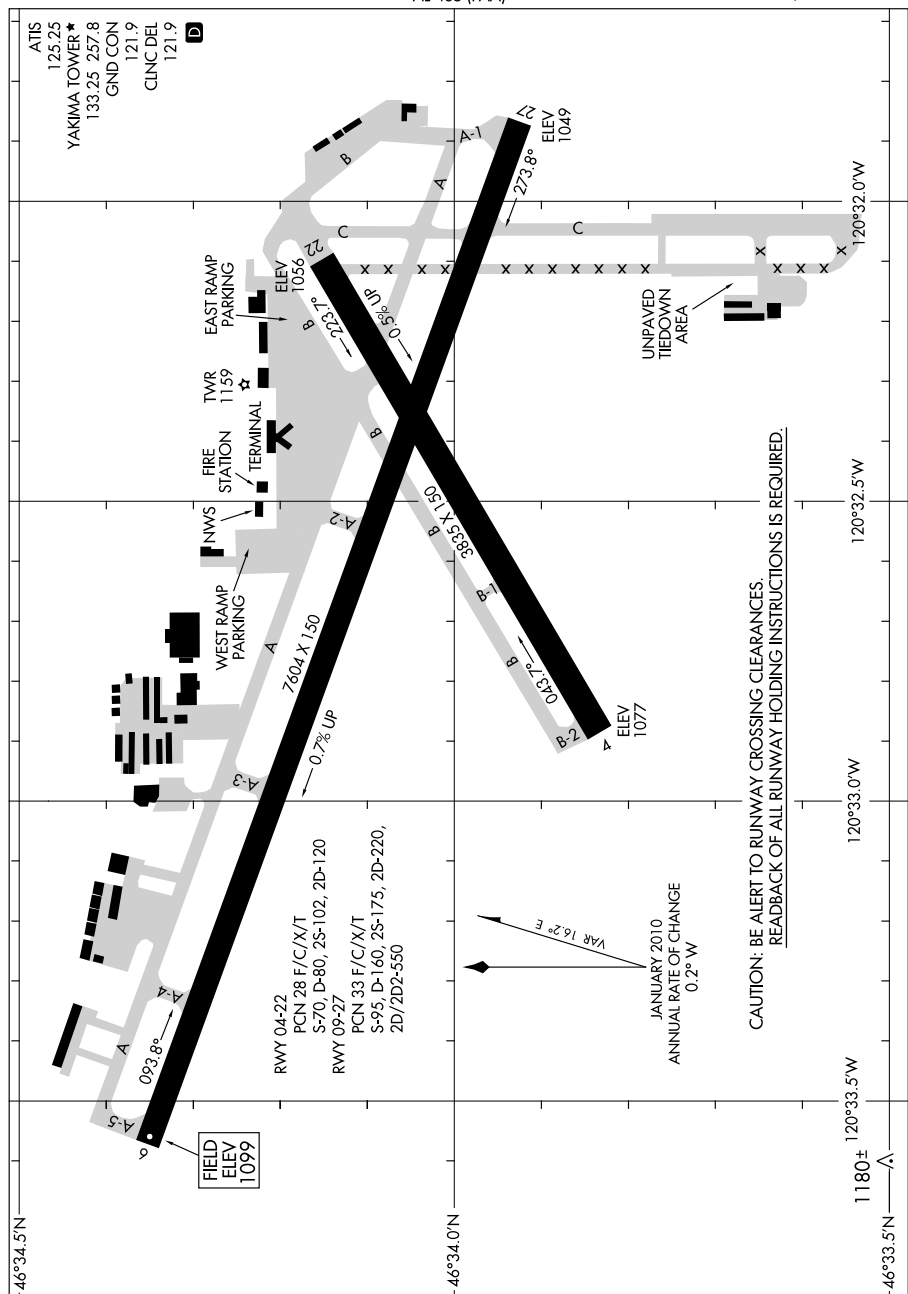


AIRPORT DIAGRAM

YAKIMA AIR TERMINAL/MCALLISTER FIELD (YKM)

**INTENTIONALLY
LEFT
BLANK**

NATIONAL WEATHER SERVICE (NWS)
UPPER AIR OBSERVING STATIONS (UAOS)
AND
WEATHER RADAR NETWORK

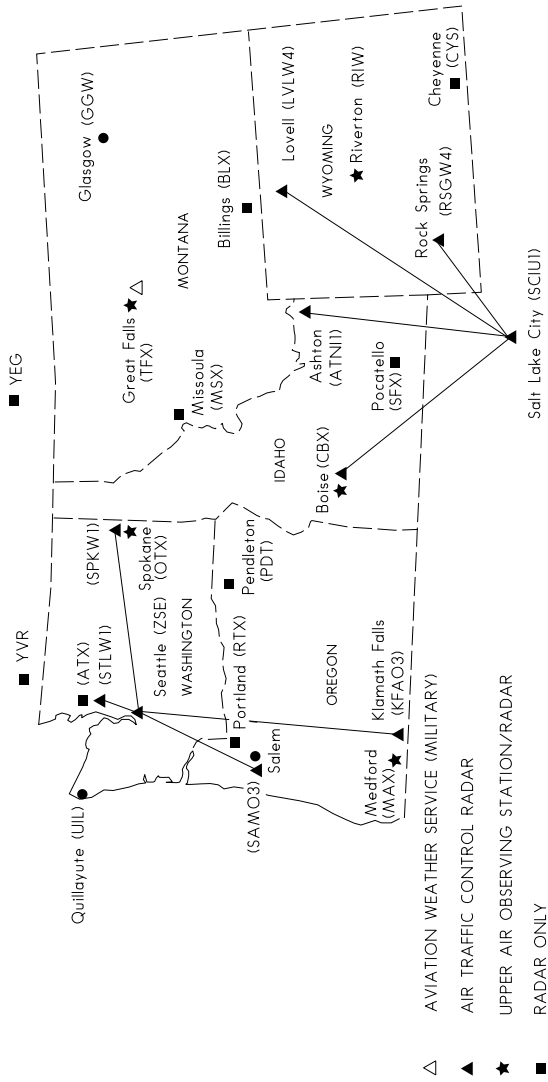

NOTE: FOR RELEASE LATER THAN 1130 UTC AND 2330 UTC, AND FOR SPECIAL RELEASES AT OTHER THAN THE SCHEDULED HOURS, AN AERONAUTICAL INFORMATION MESSAGE WILL BE FILED.

ENROUTE FLIGHT ADVISORY SERVICE (EFAS)

See Aeronautical Information Manual (AIM) for available services

